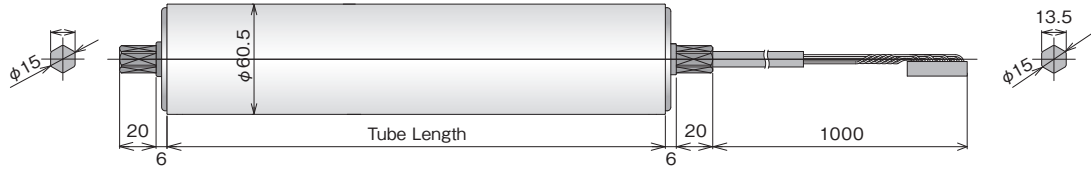


Minimum
tube lengthSpring
loaded shaft**MDR Brushless DC Motor for pallet transfer PM605KT****Roller diameter $\varnothing 60.5$** **Roller diameter $\varnothing 60.5$**
PM605KT

- **Roller diameter** / $\varnothing 60.5$
- **Thickness** / t3.2
- **Voltage** / 24V DC
- **Tube material** / STKM12

- **Surface treatment** / Trivalent chromate processing
- **Attaching shaft treatment** / Parkerizing
- **Motor cable shaft treatment** / Parkerizing

**Tube Length : PM605KT**

	360mm	360mm $\leq$							
Tube Length (mm)	400	500	600	700	800	900	1000	1100	1200
Weight (kg)	5.1	5.5	6.0	6.4	6.9	7.3	7.8	8.2	8.7
Spring loaded shaft	☐	☐	☐	☐	☐	☐	☐	☐	☐

- Conveyor frame inside dimension and frame hole shape vary by the manufacturer.
- For installation of MDR, frame inside dimension should be produced to (Tube length + 17mm).
- 3.2mm or less thickness frame is recommended to install the roller.
Contact us for other frame thickness.



Product Designation :**PM605KT - 15 - 1000 - D - 024 - KV**

Power Moller model	Nominal Speed	Tube Length	Voltage	Options
-----------------------	------------------	----------------	---------	---------

- Motor type** : KT
- Nominal Speed** : 15,55
- Tube Length** : Specify in mm.
- Voltage** : D-024 (24VDC)
- Options** : Each of the following optional specification may be selected.

Options : PM605KT**BR Built-In Brake - BR** ^{※1}
 410mm 410mm $\leq$ **KV Poly V-Belt Pulley**
 360mm 360mm $\leq$

- ※1 When holding type built-in brake is required, specify along with a driver card compatible with such brake specification.
[Electric brake (without holding function) is equipped as a standard specification.]
- Contact us for the manufacturability with other specifications.

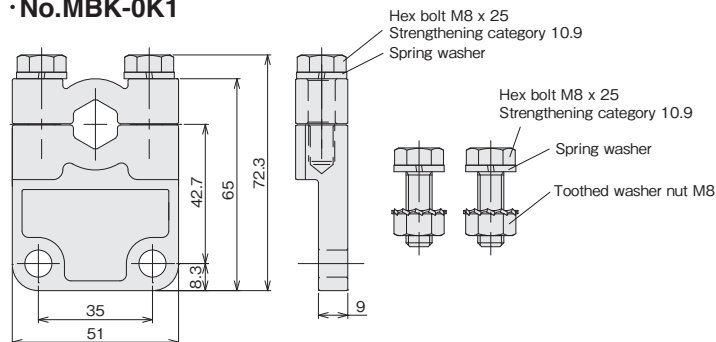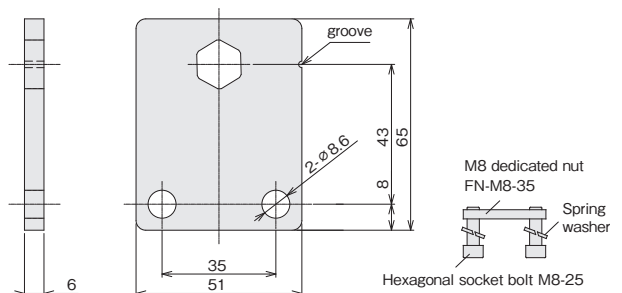Mounting Bracket : 1pce of No.MBK-0K1
1pce of No.MBK-0K1-7**• No.MBK-0K1****• No.MBK-0K1-7**

- No. MBK-0K1 bracket is mounted on cable side shaft and No. MBK-0K1-7 is mounted on spring loaded shaft.
- Apply 27.2Nm torque for securing Power Moller mounting shaft and No. MBK-0K1 bracket.

MDR Brushless DC Motor for pallet transfer PM605KT


Roller diameter $\varnothing 60.5$

 [MDR Selection Tool] is available on our web page.

Operating characteristics with CBK-109 driver card


PM605KT-15

Speed (m/min)	Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)	Rotary SW No	RSW	External input voltage (V)
	No-load	Rated	No-load	Starting					
17.2	278		0.8		88	126	ON	9	9.6~9.9
15.8	278		0.8		86	124		8	9.1~9.4
15.1	278		0.8		82	120		7	8.6~8.9
14.3	282		0.7		78	115		6	8.1~8.4
13.6	282		0.7		74	111		5	7.6~7.9
12.9	286		0.7		70	106		4	7.1~7.4
11.5	290		0.6		63	96		3	6.6~6.9
10.8	290		0.6		59	92		2	6.1~6.4
10.0	295		0.5		55	86		1	5.6~5.9
9.3	295		0.5		51	82		0	5.1~5.4
8.6	299		0.5		50	80	OFF	9	4.6~4.9
7.9	299		0.4		45	75		8	4.1~4.4
7.2	299		0.4		41	70		7	3.6~3.9
6.5	303		0.4		37	65		6	3.1~3.4
5.7	303		0.4		33	60		5	2.6~2.9
5.0	303		0.4		30	59		4	2.1~2.4
4.3	307		0.3		26	53		3	1.6~1.9
3.6	307		0.3		21	45		2	1.1~1.4
2.9	311		0.3		17	40		1	0.6~0.9
2.2	316		0.3		12	35		0	0.1~0.4

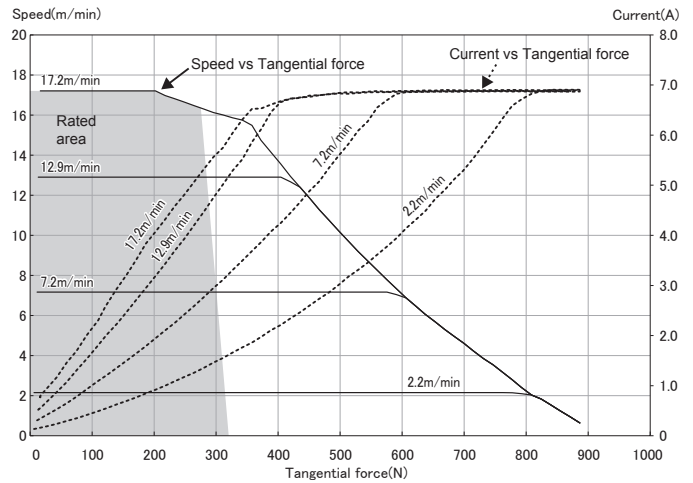

PM605KT-55


Speed (m/min)	Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)	Rotary SW No	RSW	External input voltage (V)
	No-load	Rated	No-load	Starting					
65.4	77		0.8		88	126	ON	9	9.6~9.9
60.0	77		0.8		86	124		8	9.1~9.4
57.2	77		0.8		82	120		7	8.6~8.9
54.5	78		0.7		78	115		6	8.1~8.4
51.8	78		0.7		74	111		5	7.6~7.9
49.1	79		0.7		70	106		4	7.1~7.4
43.6	80		0.6		63	96		3	6.6~6.9
40.9	80		0.6		59	92		2	6.1~6.4
38.2	82		0.5		55	86		1	5.6~5.9
35.4	82		0.5		51	82		0	5.1~5.4
32.7	83		0.5		50	80	OFF	9	4.6~4.9
30.0	83		0.4		45	75		8	4.1~4.4
27.2	83		0.4		41	70		7	3.6~3.9
24.5	84		0.4		37	65		6	3.1~3.4
21.8	84		0.4		33	60		5	2.6~2.9
19.1	84		0.4		30	59		4	2.1~2.4
16.3	85		0.3		26	53		3	1.6~1.9
13.6	85		0.3		21	45		2	1.1~1.4
10.9	86		0.3		17	40		1	0.6~0.9
8.2	87		0.3		12	35		0	0.1~0.4

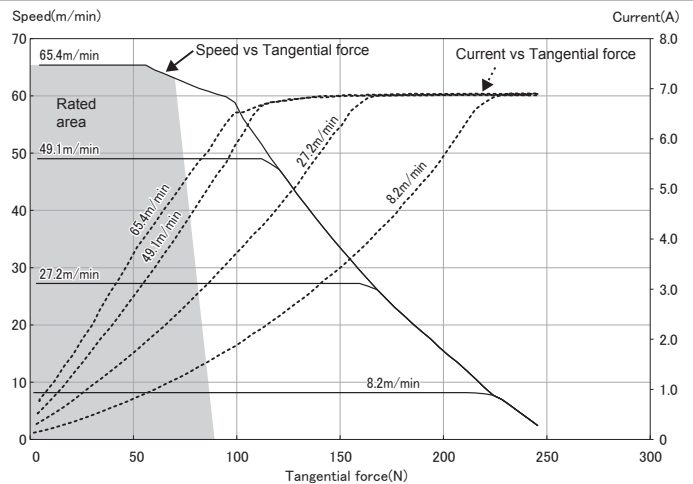

Operating characteristics with HBK-608 driver card


PM605KT-15

Speed (m/min)	Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)	Rotary SW No
	No-load	Rated	No-load	Starting			
17.2	156		0.8		52	77	9
15.8	156		0.7		48	71	8
14.3	156		0.7		43	64	7
12.9	156		0.6		39	59	6
11.5	156		0.6		35	54	5
10.0	156		0.5		30	47	4
8.6	156		0.5		26	42	3
7.2	156		0.4		22	36	2
5.7	156		0.4		17	30	1
4.3	156		0.3		14	27	0

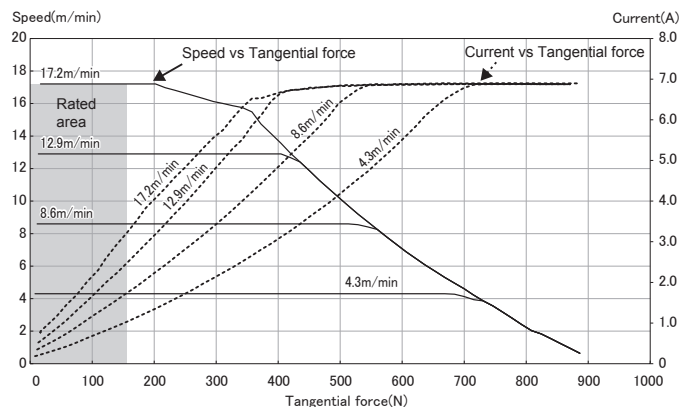

PM605KT-55

Speed (m/min)	Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)	Rotary SW No
	No-load	Rated	No-load	Starting			
65.4	43		0.8		52	77	9
60.0	43		0.7		48	71	8
54.5	43		0.7		43	64	7
49.1	43		0.6		39	59	6
43.6	43		0.6		35	54	5
38.2	43		0.5		30	47	4
32.7	43		0.5		26	42	3
27.2	43		0.4		22	36	2
21.8	43		0.4		17	30	1
16.3	43		0.3		14	27	0

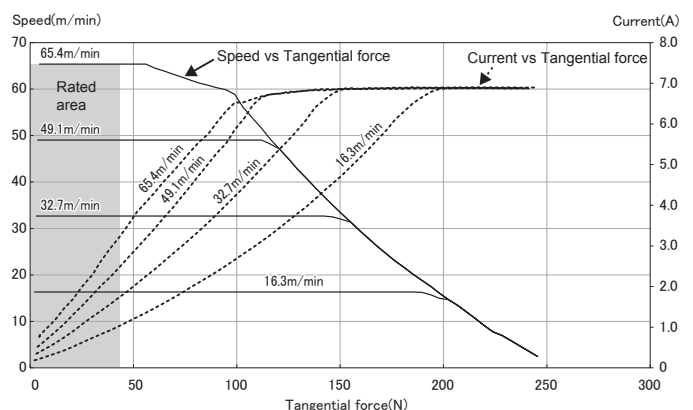


 [MDR Selection Tool] is available on our web page.

Operating characteristics with IB-E04 driver card

PM605KT-15

Speed (m/min)		Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)
No-load	Rated	Starting	No-load	Starting			
17.2	164	884	0.8	7.0	54	77	
15.8	164		0.8		53	77	
15.1	164		0.8		46	68	
14.3	164		0.7		43	64	
13.6	164		0.7		41	62	
12.9	164		0.7		39	59	
11.5	164		0.6		35	54	
10.8	164		0.6		33	50	
10.0	164		0.5		30	47	
9.3	164		0.5		28	45	
8.6	164		0.5		26	42	
7.9	164		0.4		24	39	
7.2	164		0.4		22	36	
6.5	164		0.4		20	33	
5.7	164		0.4		17	30	
5.0	164		0.4		15	27	
4.3	164		0.3		13	25	
3.6	164		0.3		11	22	
2.9	164		0.3		9	19	
2.2	164		0.3		7	17	

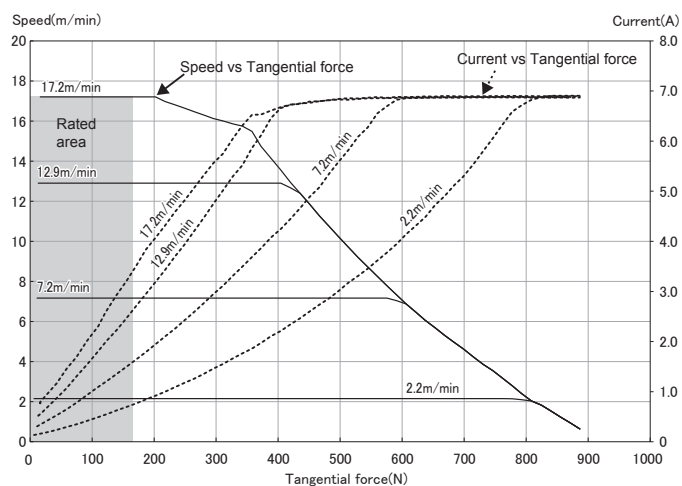

PM605KT-55

Speed (m/min)		Tangential Force (N)		Input Current (A)		Power Input (W)	Power Output (W)
No-load	Rated	Starting	No-load	Starting			
65.4	45	245	0.8	7.0	54	77	
60.0	45		0.8		53	77	
57.2	45		0.8		46	68	
54.5	45		0.7		43	64	
51.8	45		0.7		41	62	
49.1	45		0.7		39	59	
43.6	45		0.6		35	54	
40.9	45		0.6		33	50	
38.2	45		0.5		30	47	
35.4	45		0.5		28	45	
32.7	45		0.5		26	42	
30.0	45		0.4		24	39	
27.2	45		0.4		22	36	
24.5	45		0.4		20	33	
21.8	45		0.4		17	30	
19.1	45		0.4		15	27	
16.3	45		0.3		13	25	
13.6	45		0.3		11	22	
10.9	45		0.3		9	19	
8.2	45		0.3		7	17	

