


Air valve(5/2 way, 5/3 way)

4A100 Series

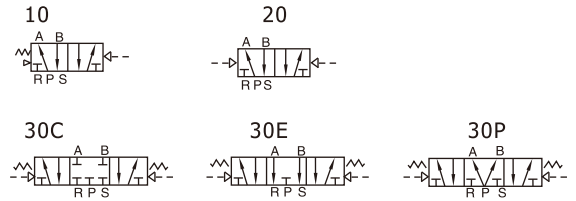

Ordering code

4A 1 10 06 T

① ② ③ ④ ⑤

| ① Model | ② Code | ③ Valve type | ④ Port size | ⑤ Thread type |
|---------------------------------|---------------|---|--------------------|----------------------------|
| 4A: Air valve (5/2, 5/3 way) | 1: 100 Series | 10: Single air control 5/2 way 20: Double air control 5/2 way 30C: Double air control 5/3 way closed center 30E: Double air control 5/3 way exhaust center 30P: Double air control 5/3 way pressure center | M5: M5 06: 1/8" | No this code(M5) T: NPT |

Please refer to P111 for manifold specification and the order way.

Specification

| Model | 4A110-M5 4A120-M5 | 4A130C-M5 4A130E-M5 4A130P-M5 | 4A110-06 4A120-06 | 4A130C-06 4A130E-06 4A130P-06 |
|-----------------------|--|-------------------------------------|-----------------------------|-------------------------------------|
| Fluid | Air(to be filtered by 40 μm filter element) | | | |
| Acting | Exterior control | | | |
| Port size [Note1] | In=Out=M5 | | In=Out=1/8" | |
| Orifice size [Note4] | 4A110-06,4A120-06:10.2mm ² (Cv=0.6) 4A130C-06:8.6mm ² (Cv=0.51) | | | |
| Valve type | 5 port 2 position | 5 port 3 position | 5 port 2 position | 5 port 3 position |
| Operating pressure | 21~114psi(0.15~0.8MPa) | | | |
| Proof pressure | 175psi(1.2MPa) | | | |
| Temperature | -20~70°C | | | |
| Material of body | Aluminum alloy | | | |
| Lubrication [Note2] | Not required | | | |
| Max.frequency [Note3] | 5 cycle/sec | 3cycle/sec | 5 cycle/sec | 3 cycle/sec |
| Weight (g) | 4A110-M5:85 4A120-M5:140 | 165 | 4A110-06:85 4A120-06:140 | 165 |

[Note1] NPT thread is available.

[Note2] Once lubricated air is used, continue with same medium to optimize valve life span.
Lubricants like ISO VG32 or equivalent are recommended.

[Note3] The maximum actuation frequency is in the no-load state.

[Note4] Equivalent orifice S and Cv are all calculated from the flow rate data.


4A100 Series

Product feature


1. Structure in sliding column mode: good tightness and sensitive reaction.
2. Three position air valves have three kinds of central function for your choice.
3. Double air control valves have memory function.
4. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
5. No need to add oil for lubrication.
6. Integrate with the manifold to save installation space.

Inner structure


4A110

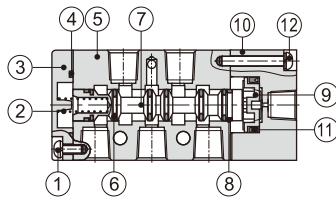

4A120

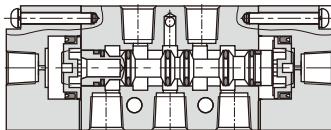


4A130C

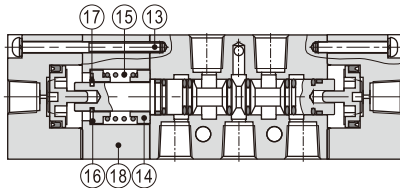

| No. | Item | No. | Item | No. | Item |
|-----|---------------------|-----|------------|-----|---------------|
| 1 | Screw | 7 | Spool | 13 | Screw |
| 2 | Spring | 8 | Wear ring | 14 | Spring holder |
| 3 | Bottom cover | 9 | Piston | 15 | Return Spring |
| 4 | Bottom cover gasket | 10 | Pilot body | 16 | Spring holder |
| 5 | Body | 11 | O-ring | 17 | E Clip |
| 6 | O-ring | 12 | Screw | 18 | Side cover |

Flow chart

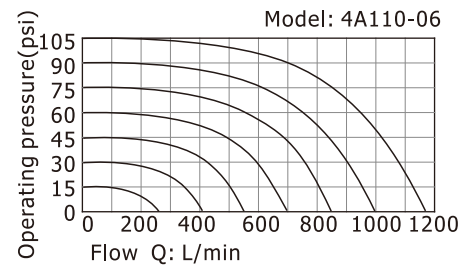

The data in flow rate chart are obtained from AirTAC lab.


Air valve(5/2 way, 5/3 way)

4A100 Series

Dimensions


4A110

[Unit: mm]

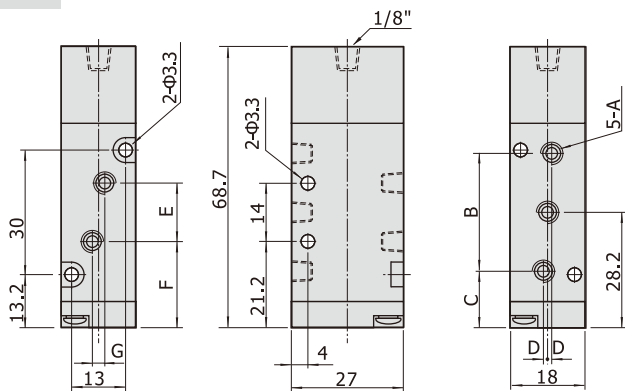


| Model\Item | A | B | C | D | E | F | G |
|------------|--------|----|------|---|----|------|---|
| 4A110-M5 | M5x0.8 | 27 | 14.7 | 0 | 14 | 21.2 | 0 |
| 4A110-06 | 1/8" | 28 | 14.2 | 1 | 16 | 20.2 | 3 |

4A120

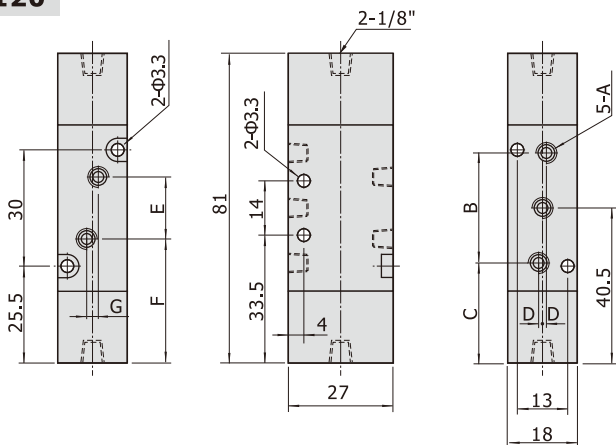

| Model\Item | A | B | C | D | E | F | G |
|------------|--------|----|------|---|----|------|---|
| 4A120-M5 | M5x0.8 | 27 | 27 | 0 | 14 | 33.5 | 0 |
| 4A120-06 | 1/8" | 28 | 26.5 | 1 | 16 | 32.5 | 3 |





4A130

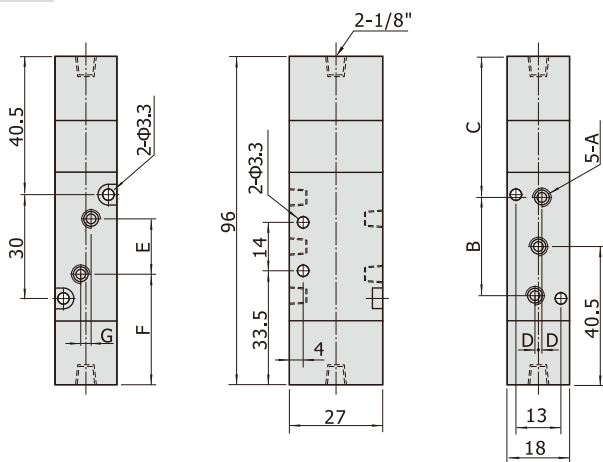

| Model\Item | A | B | C | D | E | F | G |
|------------|--------|----|------|---|----|------|---|
| 4A130-M5 | M5x0.8 | 27 | 42 | 0 | 14 | 33.5 | 0 |
| 4A130-06 | 1/8" | 28 | 41.5 | 1 | 16 | 32.5 | 3 |

Air valve(5/2 way, 5/3 way)

4A200 Series



Ordering code

4A 2 10 08 T

① ② ③ ④ ⑤

| ① Model | ② Code | ③ Valve type | ④ Port size | ⑤ Thread type |
|---------------------------------|---------------|---|----------------------|---------------|
| 4A: Air valve (5/2, 5/3 way) | 2: 200 Series | 10: Single air control 5/2 way 20: Double air control 5/2 way 30C: Double air control 5/3 way closed center 30E: Double air control 5/3 way exhaust center 30P: Double air control 5/3 way pressure center | 06: 1/8" 08: 1/4" | T: NPT |

Please refer to P111 for manifold specification and the order way.

Specification

| Model | 4A210-06 4A220-06 | 4A230C-06 4A230E-06 4A230P-06 | 4A210-08 4A220-08 | 4A230C-08 4A230E-08 4A230P-08 |
|------------------------|--|-------------------------------------|------------------------------|-------------------------------------|
| Fluid | Air(to be filtered by 40 μ m filter element) | | | |
| Acting | Exterior control | | | |
| Port size [Note1] | In=Out=Exhaust=1/8" | | In=Out=1/4" Exhaust=1/8" | |
| Orifice size [Note4] | 4A210-08,4A220-08:17.0mm ² (Cv=1.0) 4A230C-08:13.6mm ² (Cv=0.8) | | | |
| Valve type | 5 port 2 position | 5 port 3 position | 5 port 2 position | 5 port 3 position |
| Operating pressure | 21~114psi(0.15~0.8MPa) | | | |
| Proof pressure | 175psi(1.2MPa) | | | |
| Temperature | -20~70°C | | | |
| Material of body | Aluminum alloy | | | |
| Lubrication [Note2] | Not required | | | |
| Max. frequency [Note3] | 5 cycle/sec | 3 cycle/sec | 5 cycle/sec | 3 cycle/sec |
| Weight (g) | 4A210-06:185 4A220-06:285 | 365 | 4A210-08:185 4A220-08:285 | 365 |

[Note1] NPT thread is available.

[Note2] Once lubricated air is used, continue with same medium to optimize valve life span.
Lubricants like ISO VG32 or equivalent are recommended.

[Note3] The maximum actuation frequency is in the no-load state.

[Note4] Equivalent orifice S and Cv are all calculated from the flow rate data.

Air valve(5/2 way, 5/3 way)


4A200 Series

Product feature


1. Structure in sliding column mode: good tightness and sensitive reaction.
2. Three position air valves have three kinds of central function for your choice.
3. Double air control valves have memory function.
4. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
5. No need to add oil for lubrication.
6. Integrate with the manifold to save installation space.

Inner structure


4A210

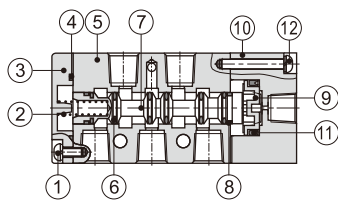

4A220

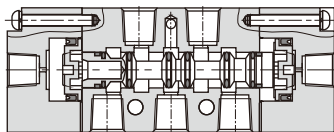


4A230C

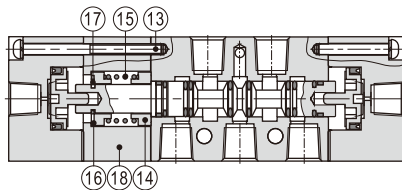

| No. | Item | No. | Item | No. | Item |
|-----|---------------------|-----|------------|-----|---------------|
| 1 | Screw | 7 | Spool | 13 | Screw |
| 2 | Spring | 8 | Wear ring | 14 | Spring holder |
| 3 | Bottom cover | 9 | Piston | 15 | Return Spring |
| 4 | Bottom cover gasket | 10 | Pilot body | 16 | Spring holder |
| 5 | Body | 11 | O-ring | 17 | E Clip |
| 6 | O-ring | 12 | Screw | 18 | Side cover |

Flow chart

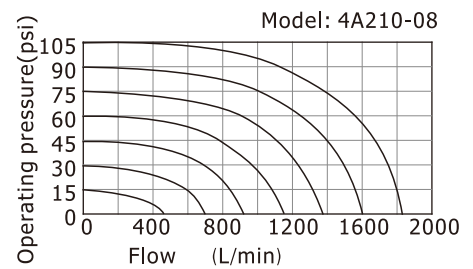

The data in flow rate chart are obtained from AirTAC lab.


Air valve(5/2 way, 5/3 way)

4A200 Series

Dimensions


4A210

[Unit: mm]

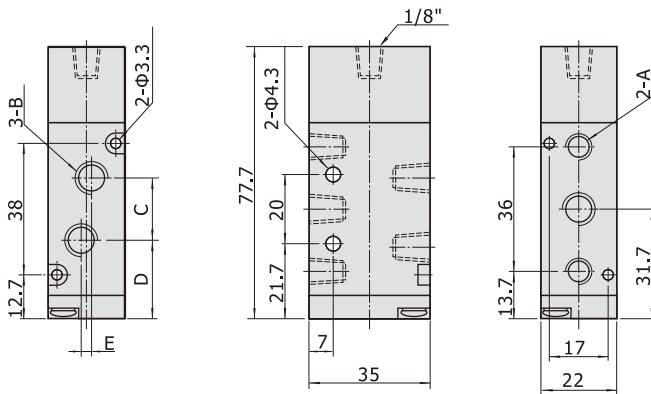


| Model\Item | A | B | C | D | E |
|------------|------|------|----|------|---|
| 4A210-06 | 1/8" | 1/8" | 18 | 22.7 | 0 |
| 4A210-08 | 1/8" | 1/4" | 21 | 21.2 | 3 |

4A220

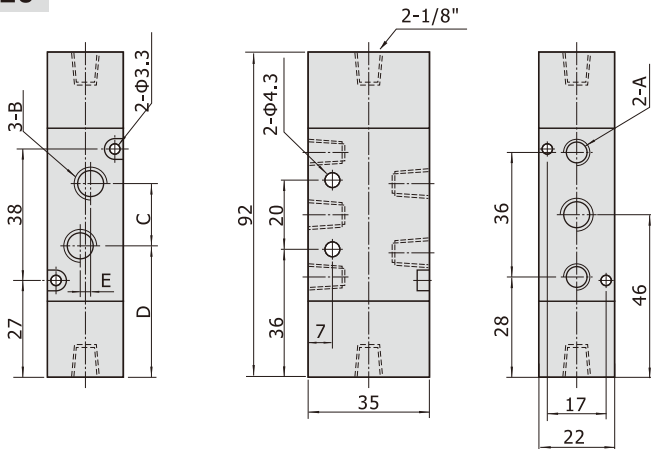

| Model\Item | A | B | C | D | E |
|------------|------|------|----|------|---|
| 4A220-06 | 1/8" | 1/8" | 18 | 37 | 0 |
| 4A220-08 | 1/8" | 1/4" | 21 | 35.5 | 3 |



4A230

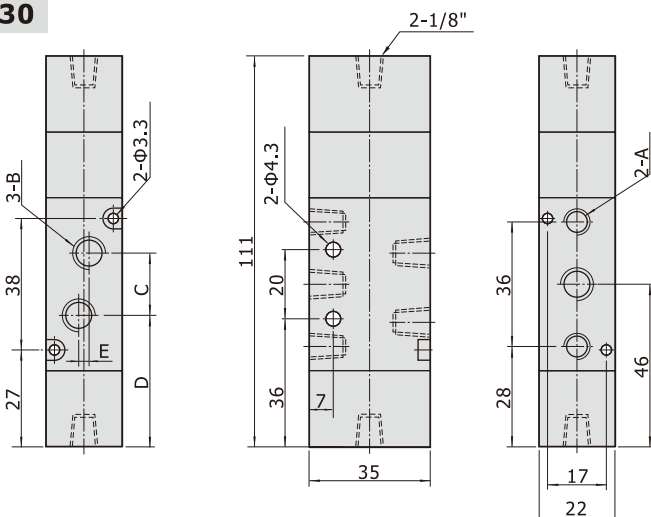

| Model\Item | A | B | C | D | E |
|------------|------|------|----|------|---|
| 4A230-06 | 1/8" | 1/8" | 18 | 37 | 0 |
| 4A230-08 | 1/8" | 1/4" | 21 | 35.5 | 3 |

Air valve(5/2 way, 5/3 way)

4A300 Series



Ordering code

4A 3 10 10 T

① ② ③ ④ ⑤

| ① Model | ② Code | ③ Valve type | ④ Port size | ⑤ Thread type |
|---------------------------------|---------------|---|----------------------|---------------|
| 4A: Air valve (5/2, 5/3 way) | 3: 300 Series | 10: Single air control 5/2 way 20: Double air control 5/2 way 30C: Double air control 5/3 way closed center 30E: Double air control 5/3 way exhaust center 30P: Double air control 5/3 way pressure center | 08: 1/4" 10: 3/8" | T: NPT |

Please refer to P111 for manifold specification and the order way.

Specification

| Model | 4A310-08 4A320-08 | 4A330C-08 4A330E-08 4A330P-08 | 4A310-10 4A320-10 | 4A330C-10 4A330E-10 4A330P-10 |
|------------------------|--|-------------------------------------|------------------------------|-------------------------------------|
| Fluid | Air(to be filtered by 40 μm filter element) | | | |
| Acting | Exterior control | | | |
| Port size [Note1] | In=Out=Exhaust=1/4" | | In=Out=3/8" Exhaust=1/4" | |
| Orifice size [Note4] | 4A310-10,4A320-10:28.0mm ² (Cv=1.65) 4A330C-10:21.3mm ² (Cv=1.25) | | | |
| Valve type | 5 port 2 position | 5 port 3 position | 5 port 2 position | 5 port 3 position |
| Operating pressure | 21~114psi(0.15~0.8MPa) | | | |
| Proof pressure | 175psi(1.2MPa) | | | |
| Temperature | -20~70°C | | | |
| Material of body | Aluminum alloy | | | |
| Lubrication [Note2] | Not required | | | |
| Max. frequency [Note3] | 4 cycle/sec | 3 cycle/sec | 4 cycle/sec | 3 cycle/sec |
| Weight (g) | 4A310-08:275 4A320-08:365 | 505 | 4A310-10:275 4A320-10:365 | 505 |

[Note1] NPT thread is available.

[Note2] Once lubricated air is used, continue with same medium to optimize valve life span.
Lubricants like ISO VG32 or equivalent are recommended.

[Note3] The maximum actuation frequency is in the no-load state.

[Note4] Equivalent orifice S and Cv are all calculated from the flow rate data.

Air valve(5/2 way, 5/3 way)


4A300 Series

Product feature


1. Structure in sliding column mode: good tightness and sensitive reaction.
2. Three position air valves have three kinds of central function for your choice.
3. Double air control valves have memory function.
4. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
5. No need to add oil for lubrication.
6. Integrate with the manifold to save installation space.

Inner structure


4A310

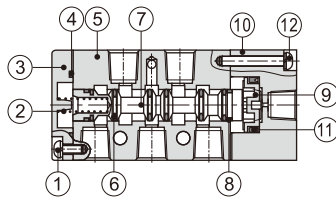

4A320

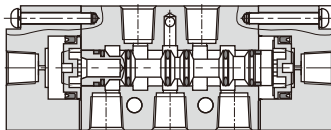


4A330C

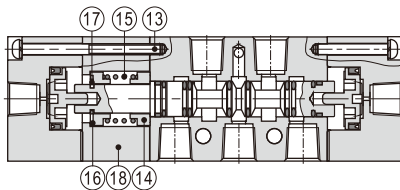

| No. | Item | No. | Item | No. | Item |
|-----|---------------------|-----|------------|-----|---------------|
| 1 | Screw | 7 | Spool | 13 | Screw |
| 2 | Spring | 8 | Wear ring | 14 | Spring holder |
| 3 | Bottom cover | 9 | Piston | 15 | Return Spring |
| 4 | Bottom cover gasket | 10 | Pilot body | 16 | Spring holder |
| 5 | Body | 11 | O-ring | 17 | E Clip |
| 6 | O-ring | 12 | Screw | 18 | Side cover |

Flow chart

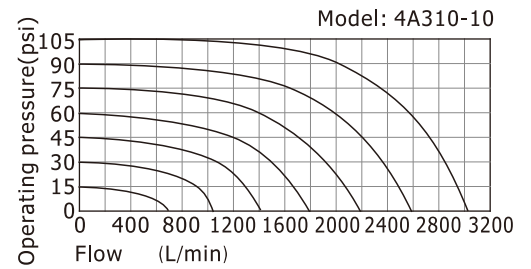

The data in flow rate chart are obtained from AirTAC lab.


Air valve(5/2 way, 5/3 way)

4A300 Series

Dimensions


4A310

[Unit: mm]

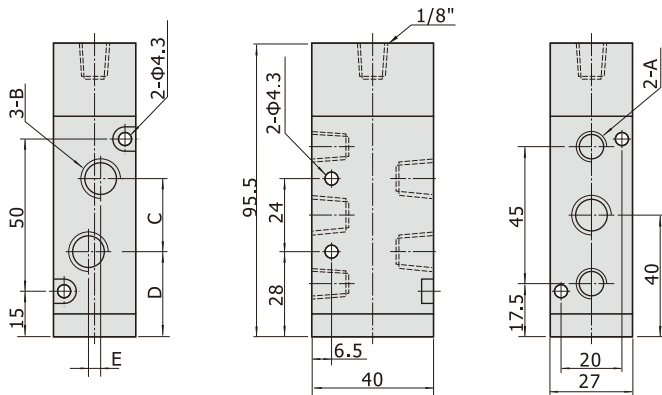


| Model\Item | A | B | C | D | E |
|------------|------|------|----|----|---|
| 4A310-08 | 1/4" | 1/4" | 22 | 29 | 0 |
| 4A310-10 | 1/4" | 3/8" | 24 | 28 | 4 |

4A320

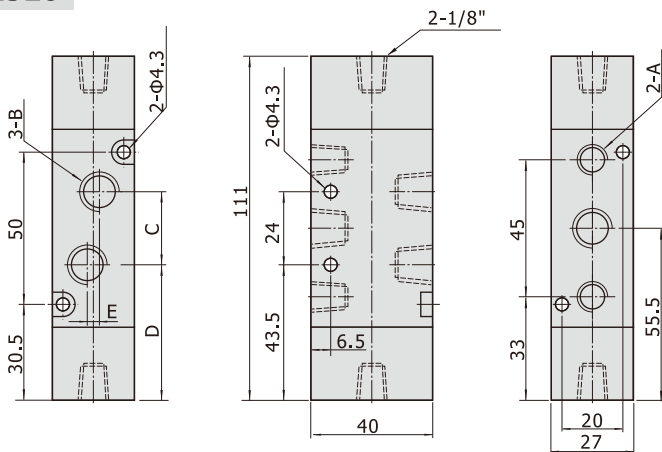

| Model\Item | A | B | C | D | E |
|------------|------|------|----|------|---|
| 4A320-08 | 1/4" | 1/4" | 22 | 44.5 | 0 |
| 4A320-10 | 1/4" | 3/8" | 24 | 43.5 | 4 |



4A330

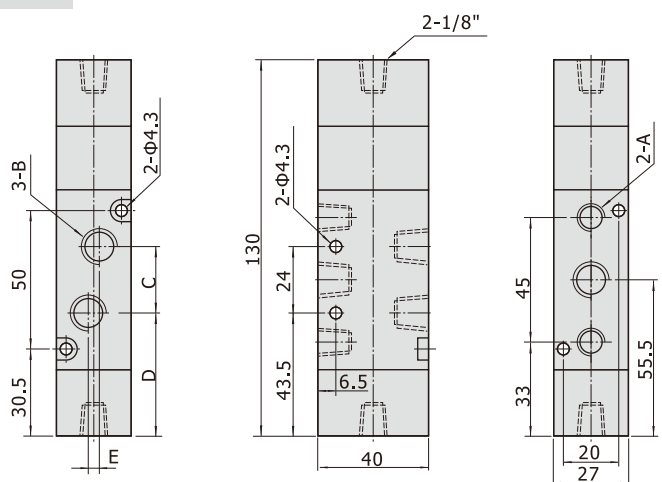

| Model\Item | A | B | C | D | E |
|------------|------|------|----|------|---|
| 4A330-08 | 1/4" | 1/4" | 22 | 44.5 | 0 |
| 4A330-10 | 1/4" | 3/8" | 24 | 43.5 | 4 |

Air valve(5/2 way, 5/3 way)

4A400 Series



Ordering code

4A 4 10 15 T

① ② ③ ④ ⑤

| ① Model | ② Code | ③ Valve type | ④ Port size | ⑤ Thread type |
|---------------------------------|---------------|---|-------------|---------------|
| 4A: Air valve (5/2, 5/3 way) | 4: 400 Series | 10: Single air control 5/2 way 20: Double air control 5/2 way 30C: Double air control 5/3 way closed center 30E: Double air control 5/3 way exhaust center 30P: Double air control 5/3 way pressure center | 15: 1/2" | T: NPT |

Please refer to P111 for manifold specification and the order way.

Specification

| Model | 4A410-15 | 4A420-15 | 4A430C-15 | 4A430E-15 | 4A430P-15 |
|------------------------|--|----------|-------------------|-----------|-----------|
| Fluid | Air(to be filtered by 40 μm filter element) | | | | |
| Acting | Exterior control | | | | |
| Port size [Note1] | In=Out=Exhaust=1/2" | | | | |
| Orifice size [Note4] | 4A410-15,4A420-15:48.0mm ² (Cv=2.82) 4A430C-15:40.0mm ² (Cv=2.35) | | | | |
| Valve type | 5 port 2 position | | 5 port 3 position | | |
| Operating pressure | 21~114psi(0.15~0.8MPa) | | | | |
| Proof pressure | 175psi(1.2MPa) | | | | |
| Temperature | -20~70 °C | | | | |
| Material of body | Aluminum alloy | | | | |
| Lubrication [Note2] | Not required | | | | |
| Max. frequency [Note3] | 3 cycle/sec | | | | |
| Weight (g) | 555 | 685 | 735 | | |

[Note1] NPT thread is available.

[Note2] Once lubricated air is used, continue with same medium to optimize valve life span.
Lubricants like ISO VG32 or equivalent are recommended.

[Note3] The maximum actuation frequency is in the no-load state.

[Note4] Equivalent orifice S and Cv are all calculated from the flow rate data.


4A400 Series

Product feature


1. Structure in sliding column mode: good tightness and sensitive reaction.
2. Three position air valves have three kinds of central function for your choice.
3. Double air control valves have memory function.
4. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
5. No need to add oil for lubrication.
6. Integrate with the manifold to save installation space.

Inner structure


4A410

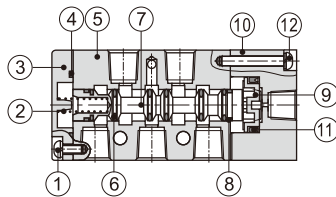

4A420

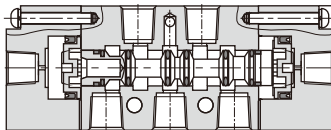


4A430C

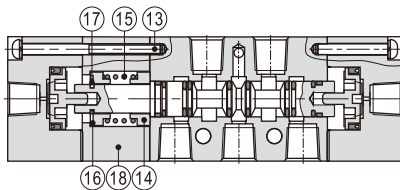

| No. | Item | No. | Item | No. | Item |
|-----|---------------------|-----|------------|-----|---------------|
| 1 | Screw | 7 | Spool | 13 | Screw |
| 2 | Spring | 8 | Wear ring | 14 | Spring holder |
| 3 | Bottom cover | 9 | Piston | 15 | Return Spring |
| 4 | Bottom cover gasket | 10 | Pilot body | 16 | Spring holder |
| 5 | Body | 11 | O-ring | 17 | E Clip |
| 6 | O-ring | 12 | Screw | 18 | Side cover |

Flow chart

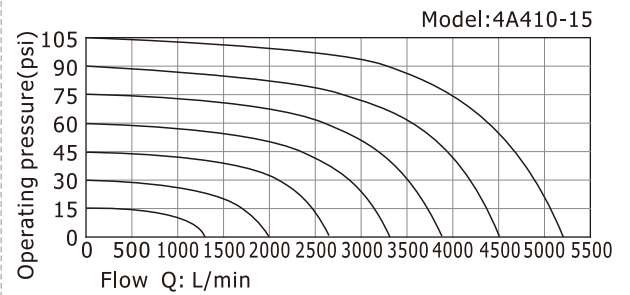

The data in flow rate chart are obtained from AirTAC lab.


Air valve(5/2 way, 5/3 way)

4A400 Series


Dimensions

4A410


[Unit: mm]

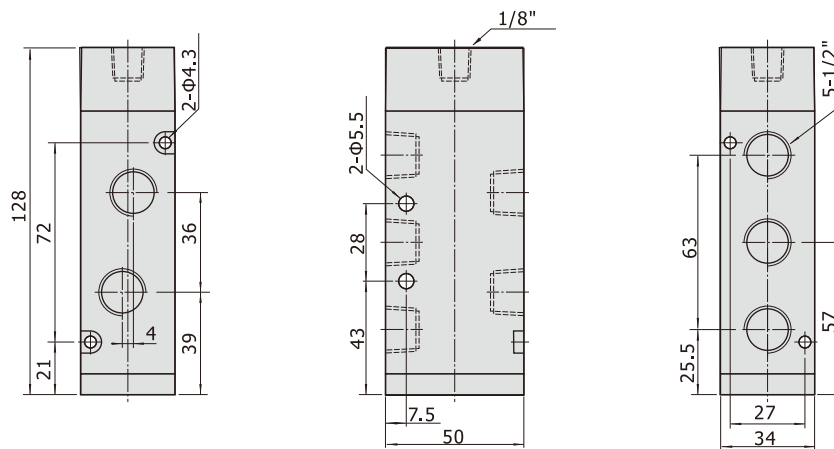


4A420

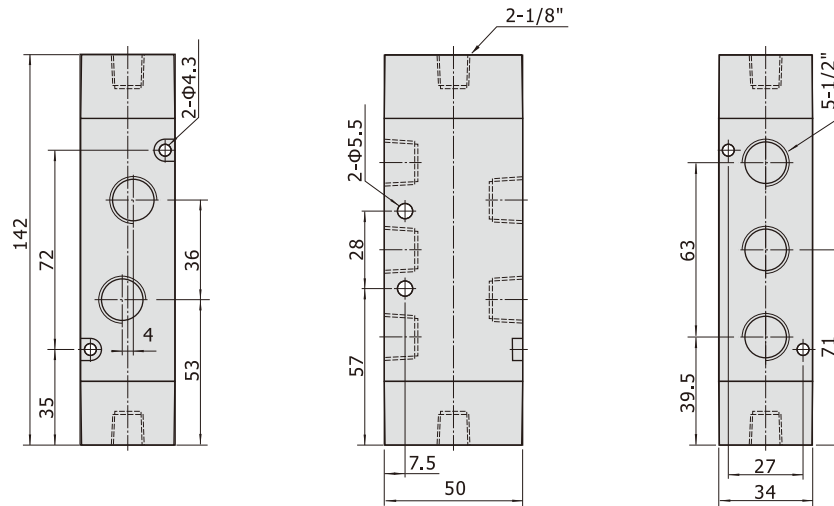

4A430

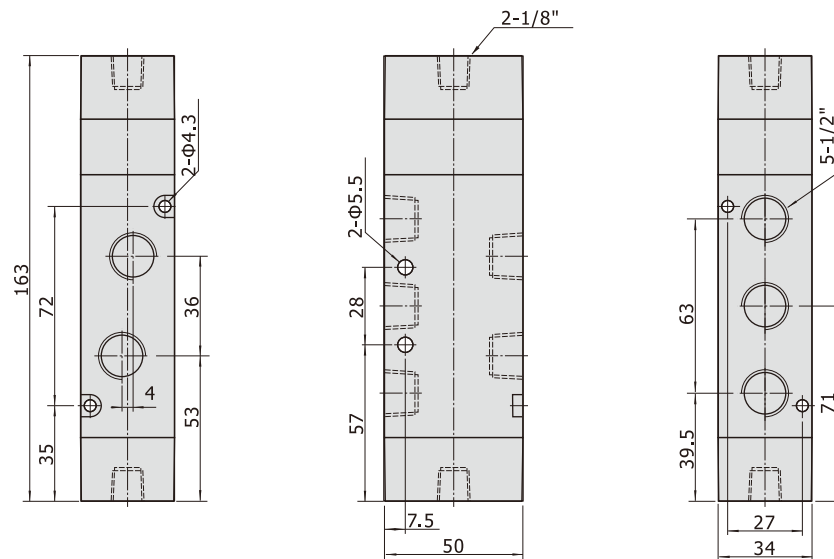

Manifold

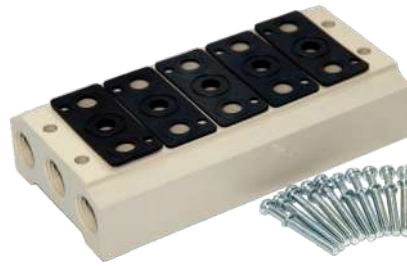

Ordering code

Ordering code for manifold

100M 5F T

① ② ③

① Model

100M: 100 Series manifold
200M: 200 Series manifold
300M: 300 Series manifold
400M: 400 Series manifold

② Number of stations [Note1]

1F: 1 station
2F: 2 station
3F: 3 station
.....
16F: 16 station

③ Thread type

T: NPT

Ordering code for blank plate

P-100M-R2

① ② ③

① Kits

P: Kits

② Model

100M: 100 Series manifold
200M: 200 Series manifold
300M: 300 Series manifold
400M: 400 Series manifold

③ Code

R2: Blank plate for manifold

[Note1] 100M, 200M series have a maximum of 16 stations ;
300M series have a maximum of 12 stations;
400M series have a maximum of 8 stations.

[Note] 1. Ordering code contains the two parts of the manifold's and the blank plate's.

2. Manifold kits contains manifold, seal and screw;

3. Blank plate kits contains blank plate and screw.

Specification


| Item \ Manifold Model | 100M | 200M | 300M | 400M |
|--------------------------|--|--------------|--------------|--------------|
| Fluid | Air(to be filtered by 40 μ m filter element) | | | |
| Temperature | -20~70℃ | | | |
| Adaptable valve's series | 4A100 Series | 4A200 Series | 4A300 Series | 4A400 Series |

Product feature

1. It is available to integrate the direction control valves of the same series to form valve group to save space and cost.
2. It is easy to examine when there are faults owing to the unified air intake and exhaust and unified wiring.
3. Flexible combination and strong expansion capability can make any combination or expansion of the numbers of direction control valves that are connected.

Manifold Dimensions

With 4A air valve

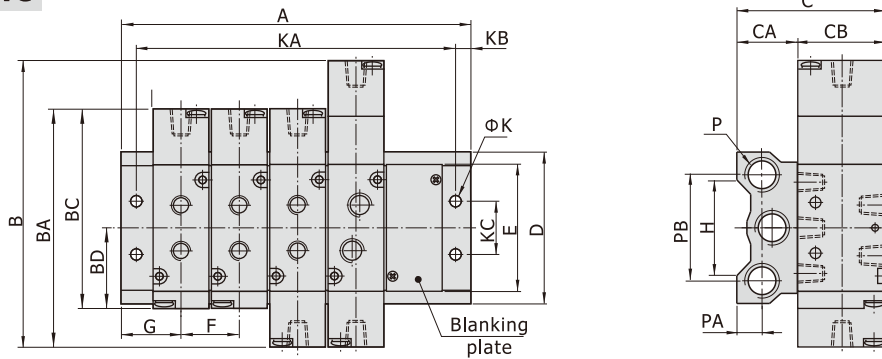

[Unit: mm]

| Model\Item | B | BA | BC | BD | C | CA | CB | D | E | F | G | H | K | KB | KC | P | PA | PB |
|------------|-----|-----|------|------|----|----|----|------|----|----|------|----|-----|----|----|------|------|----|
| 100M□F | 96 | 81 | 68.7 | 28 | 49 | 22 | 27 | 57.5 | 43 | 19 | 19 | 36 | 4.5 | 5 | 20 | 1/4" | 10 | 40 |
| 200M□F | 111 | 92 | 77.7 | 31.7 | 59 | 24 | 35 | 60 | 52 | 23 | 22 | 38 | 4.5 | 5 | 21 | 1/4" | 10 | 42 |
| 300M□F | 130 | 111 | 95.5 | 40 | 68 | 28 | 40 | 75 | 64 | 28 | 26 | 54 | 4.5 | 5 | 26 | 3/8" | 13.5 | 53 |
| 400M□F | 163 | 142 | 128 | 57 | 83 | 33 | 50 | 100 | 94 | 35 | 30.5 | 75 | 5.5 | 6 | 32 | 1/2" | 15 | 68 |

| Model\Item | A | | | | | | | | | | | | | | | |
|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | 1F | 2F | 3F | 4F | 5F | 6F | 7F | 8F | 9F | 10F | 11F | 12F | 13F | 14F | 15F | 16F |
| 100M□F | 38 | 57 | 76 | 95 | 114 | 133 | 152 | 171 | 190 | 209 | 228 | 247 | 266 | 285 | 304 | 323 |
| 200M□F | 44 | 67 | 90 | 113 | 136 | 159 | 182 | 205 | 228 | 251 | 274 | 297 | 320 | 343 | 366 | 389 |
| 300M□F | 52 | 80 | 108 | 136 | 164 | 192 | 220 | 248 | 276 | 304 | 332 | 360 | - | - | - | - |
| 400M□F | 61 | 96 | 131 | 166 | 201 | 236 | 271 | 306 | - | - | - | - | - | - | - | - |

| Model\Item | KA | | | | | | | | | | | | | | | |
|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | 1F | 2F | 3F | 4F | 5F | 6F | 7F | 8F | 9F | 10F | 11F | 12F | 13F | 14F | 15F | 16F |
| 100M□F | 28 | 47 | 66 | 85 | 104 | 123 | 142 | 161 | 180 | 199 | 218 | 237 | 256 | 275 | 294 | 313 |
| 200M□F | 34 | 57 | 80 | 103 | 126 | 149 | 172 | 195 | 218 | 241 | 264 | 287 | 310 | 333 | 356 | 379 |
| 300M□F | 42 | 70 | 98 | 126 | 154 | 182 | 210 | 238 | 266 | 294 | 322 | 350 | - | - | - | - |
| 400M□F | 49 | 84 | 119 | 154 | 189 | 224 | 259 | 294 | - | - | - | - | - | - | - | - |