



# Handling technology

Gripper series 5000

**THE KNOW-HOW FACTORY**


# ZIMMER GROUP COMMITTED TO OUR CUSTOMERS

**WE HAVE SUCCEEDED FOR YEARS BY OFFERING OUR CUSTOMERS INNOVATIVE AND INDIVIDUALIZED SOLUTIONS. ZIMMER HAS GROWN CONTINUOUSLY AND TODAY WE HAVE REACHED A NEW MILESTONE: THE ESTABLISHMENT OF THE KNOW-HOW FACTORY. IS THERE A SECRET TO OUR SUCCESS?**

**Foundation.** Excellent products and services have always been the foundation of our company's growth. Zimmer is a source of ingenious solutions and important technical innovations. This is why customers with high expectations for technology frequently find their way to us. When things get tricky, Zimmer Group is in its best form.

**Style.** We have an interdisciplinary approach to everything we do, resulting in refined process solutions in six technology fields. This applies not just to development but to production. Zimmer Group serves all industries and stands ready to resolve even the most unique and highly individualized problems. Worldwide.

**Motivation.** Customer orientation is perhaps the most important factor of our success. We are a service provider in the complete sense of the word. With Zimmer Group, our customers have a single, centralized contact for all of their needs. We approach each customer's situation with a high level of competence and a broad range of possible solutions.

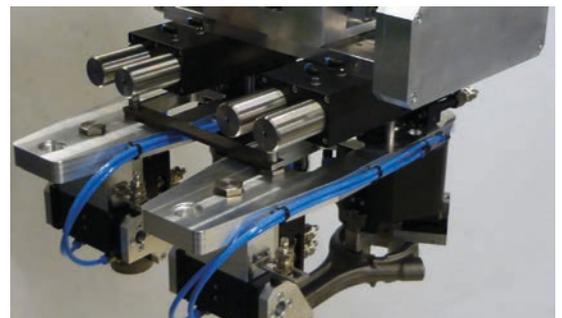

# TECHNOLOGIES



## HANDLING TECHNOLOGY

MORE THAN 30 YEARS OF EXPERIENCE AND INDUSTRY KNOWLEDGE: OUR PNEUMATIC, HYDRAULIC AND ELECTRICAL HANDLING COMPONENTS AND SYSTEMS ARE GLOBAL LEADERS.

**Components.** More than 2,000 standardized grippers, swivel units, robotic accessories and much more. We offer a complete selection of technologically superior products that are ready for rapid delivery.

**Semi-standard.** Our modular approach to design enables custom configurations and high rates of innovation for process automation.



## DAMPING TECHNOLOGY

INDUSTRIAL DAMPING TECHNOLOGY AND SOFT CLOSE PRODUCTS EXEMPLIFY THE INNOVATION AND PIONEERING SPIRIT OF THE KNOW-HOW FACTORY.

### Industrial damping technology.

Whether standard or customized solutions, our products stand for the highest cycle rates and maximum energy absorption with minimal space requirements.

**Soft Close.** Development and mass production of pneumatic and fluid dampers with extraordinary quality and rapid delivery.

**OEM and direct.** Whether they need components, returning mechanisms or complete production lines – we are the trusted partner of many prestigious customers.




## LINEAR TECHNOLOGY

WE DEVELOP LINEAR COMPONENTS AND SYSTEMS THAT ARE INDIVIDUALLY ADAPTED TO OUR CUSTOMERS' NEEDS.

### Clamping and braking elements.

We offer you more than 4,000 types for profiled and round rails as well as for a variety of guide systems from all manufacturers. It makes no difference whether you prefer manual, pneumatic, electric or hydraulic drive.

**Flexibility.** Our clamping and braking elements ensure that movable components such as Z-axes or machining tables maintain a fixed position and that machines and systems come to a stop as quickly as possible in an emergency.

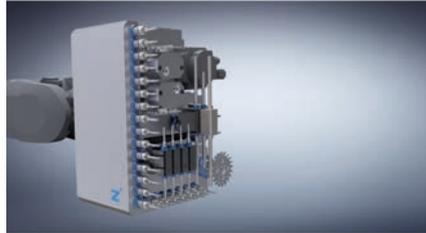

## PROCESS TECHNOLOGY

MAXIMUM EFFICIENCY IS ESSENTIAL FOR SYSTEMS AND COMPONENTS USED IN PROCESS TECHNOLOGY. HIGH-LEVEL CUSTOM SOLUTIONS ARE OUR TRADEMARK.

**A rich reservoir of experience.** Our know-how ranges from the development of materials, processes and tools through product design to production of series products.

**Deep production capabilities.** The Zimmer Group pairs these capabilities with flexibility, quality and precision, even when making custom products.

**Series production.** We manufacture demanding products out of metal (MIM), elastomers and plastics with flexibility and speed.

## MACHINE TECHNOLOGY

ZIMMER GROUP DEVELOPS INNOVATIVE METAL, WOOD AND COMPOSITE MATERIAL PROCESSING TOOL SYSTEMS FOR ALL INDUSTRIES. NUMEROUS CUSTOMERS CHOOSE US AS THEIR SYSTEMS AND INNOVATION PARTNER.

**Knowledge and experience.** Industry knowledge and a decades-long development partnership in exchangeable assemblies, tool interfaces and systems make us bound for new challenges around the world.

**Components.** We deliver numerous standard components from stock and develop innovative, customized systems for OEM and end customers – far beyond the metal and wood processing industries.

**Variety.** Whether you have machining centers, lathes or flexible production cells, the power tools, holders, assemblies and drilling heads of Zimmer Group are ready for action.

## SYSTEM TECHNOLOGY

ZIMMER GROUP IS ONE OF THE LEADING SPECIALISTS IN THE DEVELOPMENT OF CUSTOMIZED SYSTEM SOLUTIONS WORLDWIDE.


**Customized.** A team made up of more than 20 experienced designers and project engineers develop and produce customized solutions for special tasks in close collaboration with end customers and system integrators. It doesn't matter if it is a simple gripper and handling solution or a complex system solution.

**Solutions.** These system solutions are used in many industries, from mechanical engineering to the automotive and supplier industries to plastics engineering and consumer goods industries, all the way to foundries. The Know-how Factory helps countless companies to thrive competitively by increasing automation efficiency.

# PRODUCT BENEFITS


## PRODUCT FAMILY 5000

### Gripper Series 5000

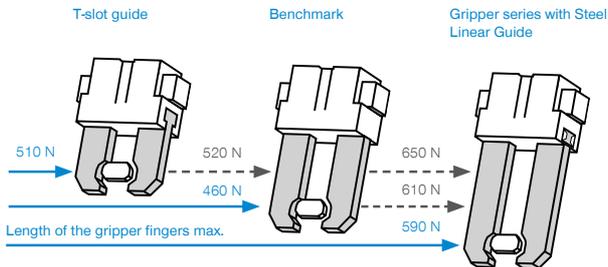


### Is installing the most powerful components important to you?

- ▶ Increase the safety of your machine by installing a gripper from this series
- ▶ It offers you up to 30% higher gripping force and up to 10% higher static forces and moments
- ▶ Using it means you can install gripper fingers that are up to 10% longer than the best-known models in the market
- ▶ And you can be sure that these grippers give you the same performance as electrically driven grippers

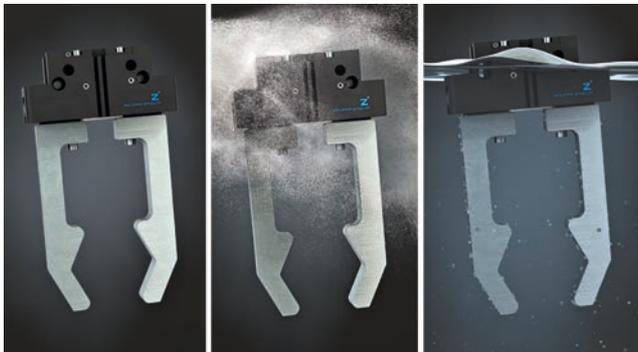


### Do you want to use one gripper for any task?

- ▶ Cut the number of articles you manage
- ▶ And so reduce your design and stock-keeping costs to a minimum
- ▶ The gripper guarantees you process reliability, no matter what the environmental conditions
- ▶ Corrosion protection included
- ▶ Select either a pneumatic or electrical drive, to give you maximum flexibility when creating your design

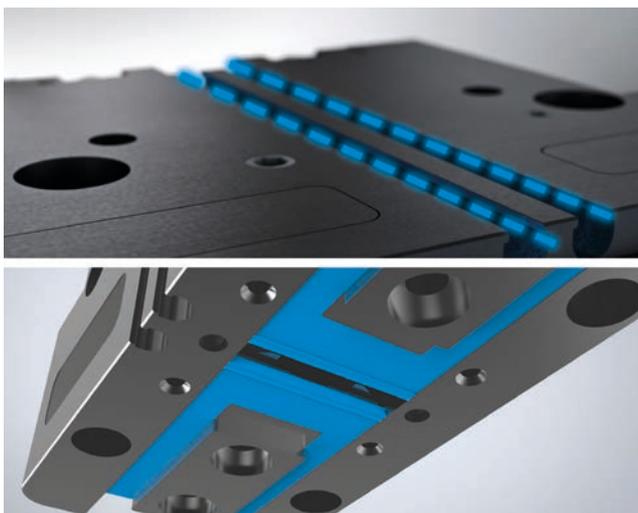

### Are details important to you?

- ▶ The transverse sensor grooves mean you can change the piston position sensing quickly and easily, wherever the gripper is installed
- ▶ Only one interference contour check required, because a spacer compensates for the height difference between the electrical and pneumatic gripper
- ▶ With additional pin holes underneath the cover plate for customer-specific attachments
- ▶ With integrated lubrication reservoir

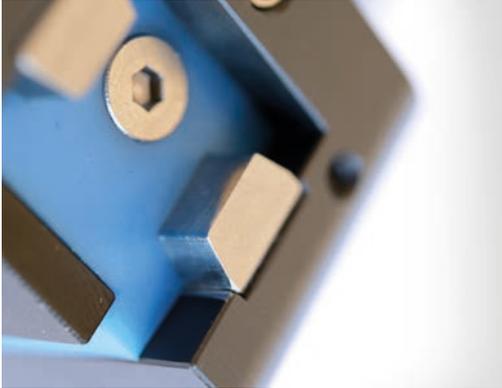

### Do you want state-of-the-art technology in your machine?

- ▶ The gripper's Steel Linear Guide combines proven linear guide principles with the very latest sealing and technology
- ▶ You benefit from one of the most robust and longest-lasting grippers currently available on the market, with a maintenance-free working life of up to 30 million cycles

### Do you want a wide range of accessories, perfectly tailored to your gripper?



#### UB universal jaws

Machinable gripper blanks that you can customize specifically for your applications.



#### DSV pressure safety valve

The safety of your machine design will increase thanks to this pressure safety valve, which prevents the gripper from opening unintentionally in the event of a drop in air pressure.



#### EB adjustment jaws

For tool-free adjustment of the gripping range by moving the locking jaws. Allows for different part sizes to be gripped with just a single set of gripper fingers.



#### 2-position sensor

Space-saving and simple option for querying 2 positions with just one sensor. Quick programming saves time when compared to the setup of conventional sensors.



#### WB interchangeable jaws

For quickly changing individual gripper fingers. A fixed part (on gripper side) and a loose part set (on jaw side) are needed for this.



#### ADS pressure piece

You hit the limit stop of the pressure piece when picking up the workpiece. When depositing the workpiece or opening the gripper, the workpiece is fed into a clamping chuck or similar intake via the pretensioned spring.



#### LB L-jaws

Fast and simple way to enable your gripper fingers to also be mounted laterally.

- ▶ Many more accessories can be found in our main catalog or on our website.



Zimmer-Group.com  
Z

Control panel with buttons and a small display area.

# SERIES


## PRODUCT FAMILY 5000

<b>2-JAW PARALLEL GRIPPERS PNEUMATIC</b>		<b>1</b>
	SERIES GPP5000	10
<b>2-JAW PARALLEL GRIPPERS PNEUMATICALLY INTELLIGENT</b>		<b>2</b>
	SERIES GPP5000IL	86
<b>2-JAW PARALLEL GRIPPERS ELECTRIC</b>		<b>3</b>
	SERIES GEP5000	118
<b>3-JAW CONCENTRIC GRIPPERS PNEUMATIC</b>		<b>4</b>
	SERIES GPD5000	138
<b>3-JAW CONCENTRIC GRIPPERS PNEUMATICALLY INTELLIGENT</b>		<b>5</b>
	SERIES GPD5000IL	212
<b>3-JAW CONCENTRIC GRIPPERS ELECTRIC</b>		<b>6</b>
	SERIES GED5000	244
<b>2-JAW ANGULAR GRIPPERS PNEUMATIC</b>		<b>7</b>
	SERIES GPW5000	264
<b>ADJUSTMENT JAWS</b>		<b>8</b>
	EB5000 SERIES	284
<b>ANGLE FLANGE</b>		<b>9</b>
	SERIES WFR	296

# 2-JAW PARALLEL GRIPPERS

## SERIES GPP5000

### ▶ PRODUCT ADVANTAGES

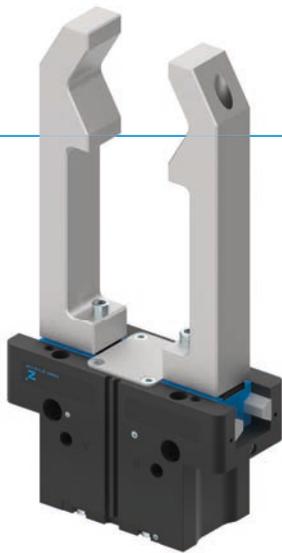

reddot design award  
winner 2018

#### “The best”

##### ▶ Steel Linear Guide –

##### The superior guidance system concept

The steel / steel guide stands for lasting precision, durability and a long service life—featuring maintenance intervals of up to 30 million gripping cycles. Benefit from these features and increase the profitability and process reliability of your machine.


##### ▶ Leakproof and corrosion protected – The universal gripper

Suitable for virtually all ambient conditions, with a sealed guide up to IP67 and corrosion protection as standard, you are able to use this gripper universally. As a result, the range of models in your production is reduced, along with a reduction in associated storage and process costs.

##### ▶ Aluminum Linear Guide – The alternative

Reduced to those aspects which are the most important, the steel / aluminum guide variant offers significantly better performance when compared to a similar gripper with a T-groove travel guide, and is on par with the best principles of toothed guidance systems.

### ▶ BENEFITS IN DETAIL

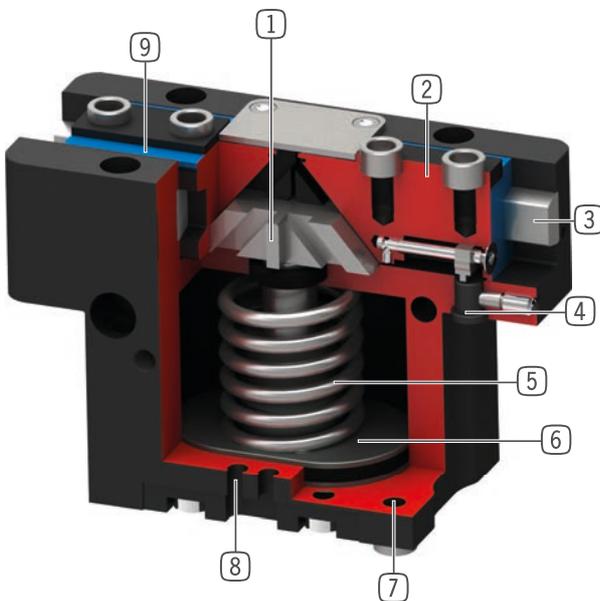

#### ① Wedge hook mechanism

- Supports to absorb high forces and moments
- Synchronized gripper jaw movement

#### ② Gripper jaw

- Gripper fingers mounted using removable centering sleeves
- Lubricated for life via incorporated lubrication slots

#### ③ Steel Linear Guide

- Steel in steel guide
- Enables use of extremely long gripper fingers
- Also available in steel / aluminum variant

#### ④ Mounting block

- mounting for inductive proximity switch

#### ⑤ Integrated gripping force safety device

- Spring built into cylinder chamber as an energy store

#### ⑥ Drive

- Double-acting pneumatic rotor cylinder

#### ⑦ Mounting and positioning

- Alternatively, on several sides for customized mounting
- Pneumatic and electrical versions identical apart from height

#### ⑧ Sensing slot

- mounting and positioning of magnetic field sensors

#### ⑨ Dual lip seal

- IP64 and up to IP67 (with purged air) for Protector version
- Prevents grease from being squeezed out, increasing service life



## ► SERIES CHARACTERISTICS

Installation size		Variants				
GPP50XX		-00	-20	-21	-24	-AL
N	Long stroke	●	●	●	●	●
NC	Long stroke / Spring closing	●	●	●	●	●
NO	Long stroke / Spring opening	●	●	●	●	●
S	High-strength	●	●	●	●	
SC	High-strength / Spring closing	●	●	●	●	
SO	High-strength / Spring opening	●	●	●	●	
	Steel / steel guide	●	●	●	●	
	Steel / aluminum guide					●
	15 million maintenance-free cycles (max.)					●
	30 million maintenance-free cycles (max.)	●	●	●	●	
	Inductive sensor	●	●	●	●	
	Magnetic field sensor	●	●	●	●	●
	Protected against corrosion	●	●	●	●	
	Purged air	●	●	●	●	●
	Temperature-resistant		●		●	
	IP40					●
	IP64	●	●			
	IP67*			●	●	

\*with purged air (max. 0,5 bar)

## ► TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GPP5003	2,5	140 - 205	0,08 - 0,12	IP40 / IP64 / IP67*
GPP5004	2 - 4	200 - 630	0,15 - 0,3	IP40 / IP64 / IP67*
GPP5006	3 - 6	330 - 1080	0,28 - 0,44	IP40 / IP64 / IP67*
GPP5008	4 - 8	520 - 1670	0,53 - 0,76	IP40 / IP64 / IP67*
GPP5010	5 - 10	885 - 2890	0,85 - 1,31	IP40 / IP64 / IP67*
GPP5013	6 - 13	1410 - 4400	1,5 - 2,26	IP40 / IP64 / IP67*
GPP5016	8 - 16	2090 - 6600	2,9 - 4,4	IP40 / IP64 / IP67*
GPP5025	14 - 25	3280 - 9130	6,1 - 8,75	IP64 / IP67*
GPP5030	17 - 30	5000 - 13550	9,2 - 13,7	IP64 / IP67*
GPP5035	20 - 35	6100 - 15900	15,8 - 23,3	IP64 / IP67*
GPP5045	26 - 45	10200 - 26950	33 - 50	IP64 / IP67*

\*with purged air (max. 0,5 bar)

# 2-JAW PARALLEL GRIPPERS



## SERIES GPP5000 GRIPPER FINGER LENGTH



### MAXIMUM GRIPPER FINGER LENGTH

1

Series GPP5000 / 2-Jaw Parallel Grippers / pneumatic / Grippers

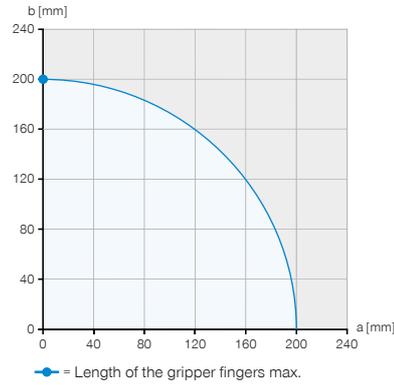
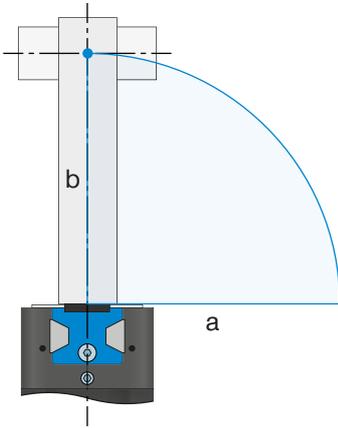


#### Example 1

Vertical force application point

$a = 0 \text{ mm}$

$b = 200 \text{ mm}$

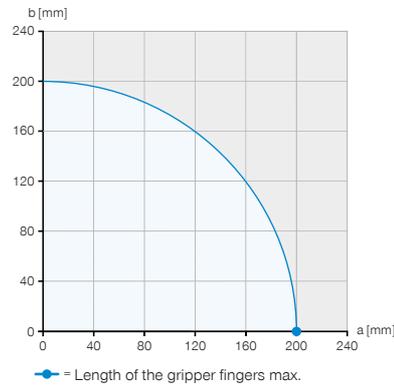
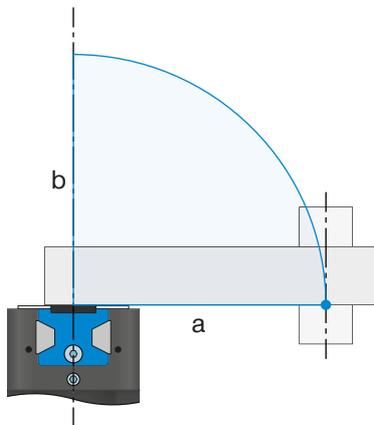


#### Example 2

Horizontal force application point

$a = 200 \text{ mm}$

$b = 0 \text{ mm}$

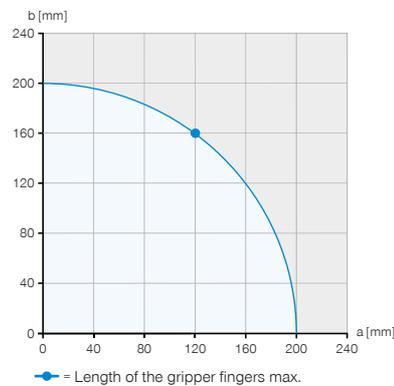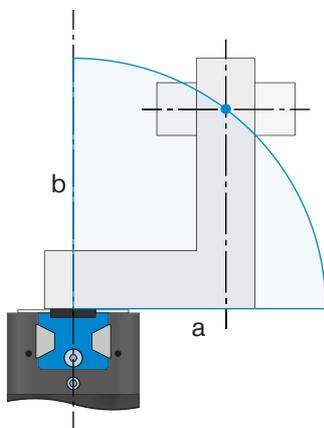

#### Example 3

Maximum permissible projection


$a = 120 \text{ mm}$

$b = 160 \text{ mm}$


The examples show the maximum horizontal (a) and vertical (b) gripper finger length using the example of a GPP5013N-00-A, which is represented by the blue area.



## GRIPPING FORCE AS A FUNCTION OF GRIPPER FINGER LENGTH

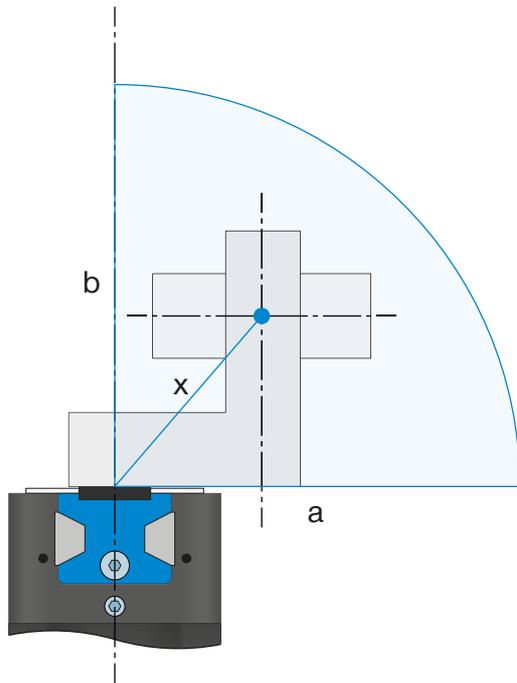

### ► Gripping force diagram

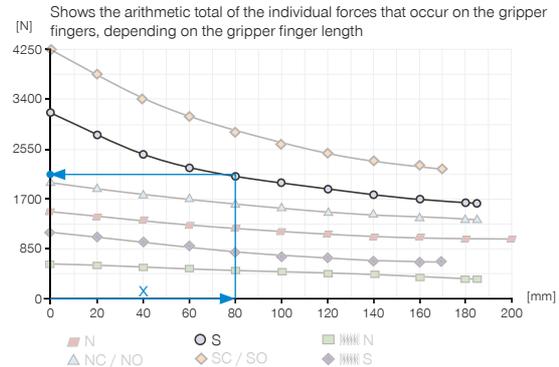

### Example 4

Resulting gripper finger length for determining the gripping force

a = 55 mm

b = 58 mm

$$x = \sqrt{55^2 + 58^2} = 80 \Rightarrow 2125 \text{ N}$$



## GUIDE CHARACTERISTICS

### Steel / aluminum guide and steel / steel guide in comparison

In general, the maximum possible length of gripper fingers of a steel / aluminum guide is lower in comparison to the steel / steel guide, due to the lower yield point of aluminum. While the maximum gripper finger length in the horizontal (a) and vertical (b) direction can be fully utilized for the steel / steel guide, the maximum gripper finger length that is specified in the technical data for the steel / aluminum guide is reduced by 20% at a horizontal (a) projection. The lower efficiency of a steel / aluminum guide also leads to a higher decrease in gripping force at an increased gripping finger length and to a reduction in service life as a result of a lower resistance to wear.

### Steel / aluminum guide

Steel / aluminum guides are very common worldwide. They are available in many different forms and are installed in virtually all commercially available grippers from an extremely wide variety of manufacturers. The steel / aluminum grippers from Zimmer Group are available as AL variants of the tried-and-tested 5000 Series. Their designs are geared toward the important aspects and they are very cost-effective.

### Steel / steel guide

Steel / steel guides are the best and first choice wherever durability and robustness are essential. The Steel Linear Guide from Zimmer Group is also clearly distinguished from a steel / aluminum guide thanks to its exclusive design featuring higher material characteristics.

### Steel Linear Guide – Added value in detail

- + Steel in steel guide
- + IP64 and up to IP67 (with sealing air) in the protector version
- + Corrosion protected
- + Up to 30 million maintenance-free cycles (max.)

# 2-JAW PARALLEL GRIPPERS


## SERIES GPP5000 FUNCTIONAL DESCRIPTION



### GRIPPING COMPONENTS

1


Series GPP5000 / 2-Jaw Parallel Grippers / pneumatic / Grippers

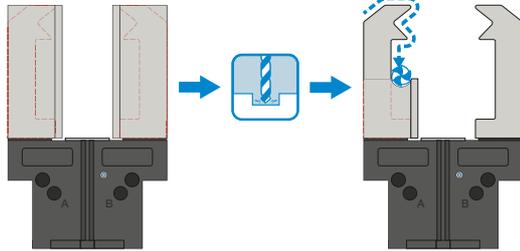

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

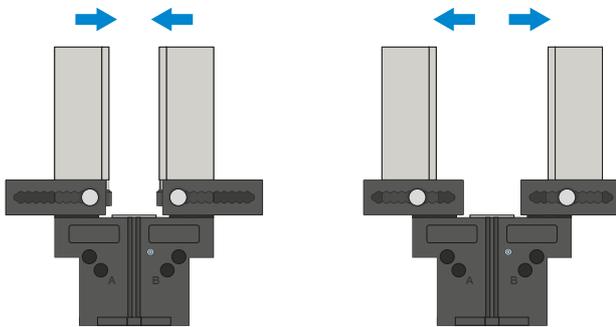

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

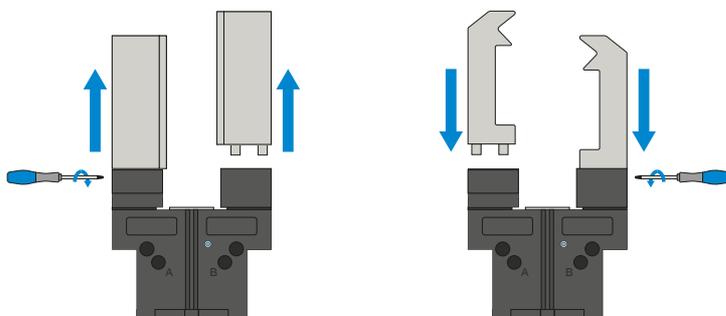

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.




## ENERGY SUPPLY

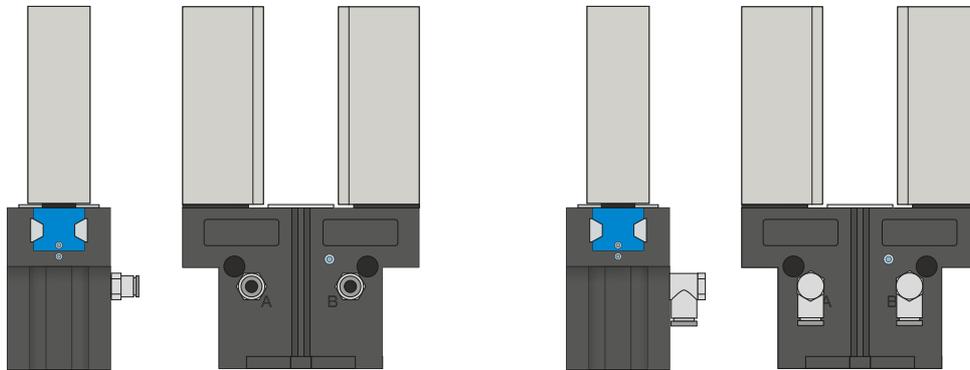

### Pneumatic threaded connections

Available in straight and angled design. Can be chosen freely depending on the space conditions or installation situation.

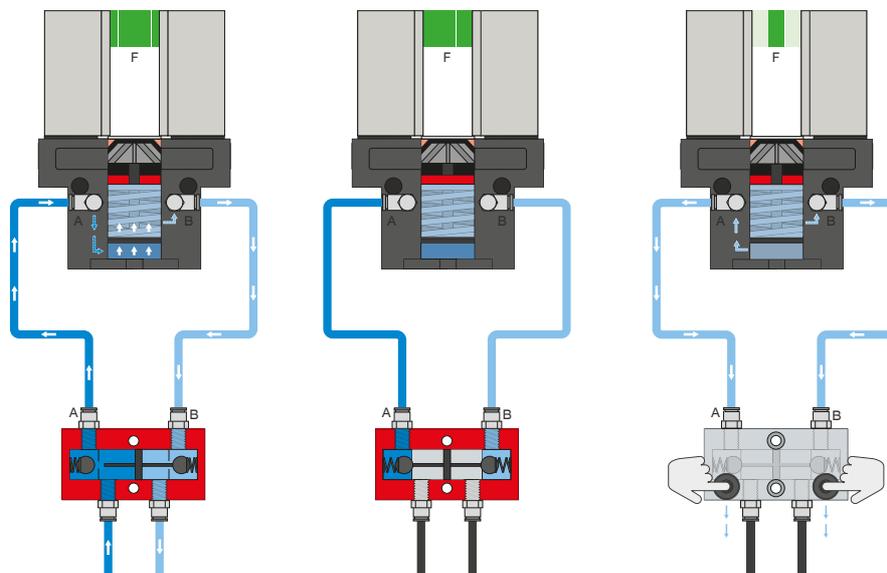

### Pressure safety valve – DSV

Ensures safe retention of force and position if the system pressure drops

The integrated double check valve, which can be unlocked, retains the system pressure of the gripper in case of EMERGENCY STOP. To ensure the function, the valve must be installed as close to the gripper's air connection as possible. In variant E, two pushbuttons are installed that allow for controlled bleeding of the gripper.

# 2-JAW PARALLEL GRIPPERS


## SERIES GPP5000 FUNCTIONAL DESCRIPTION



### ENERGY SUPPLY

1

Series GPP5000 / 2-Jaw Parallel Grippers / pneumatic / Grippers

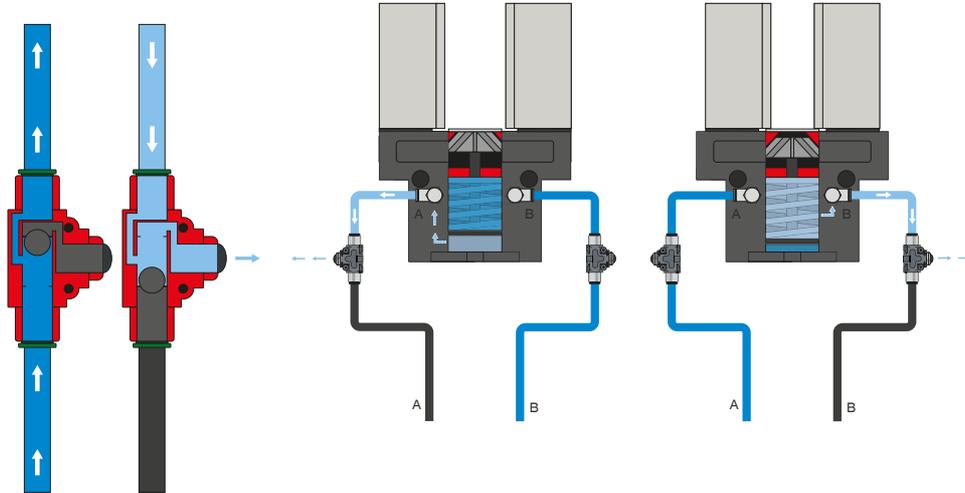


### Quick exhaust valve – DEV

For rapid bleeding of the compressed air and preventing back pressure

The inline valves make a faster cycle time possible and prevent the formation of condensate in grippers with a small cylinder volume. To ensure the function, the valve must be installed as close to the gripper's air connection as possible.



### SENSORS

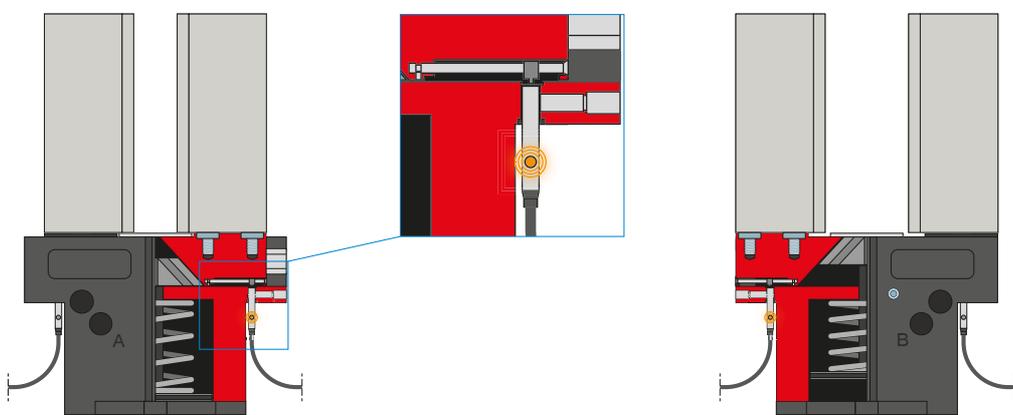

### Inductive sensors – NJ\*

For direct position sensing of the gripper jaws


The sensor is guided into the intake as far as it will go and fixed in place using the lateral clamping screw. Tuning to the desired position then takes place by adjusting the cam switch. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector, as well as with direct plug orientation.

\*Not for variant AL-A




## SENSORS

MFS02

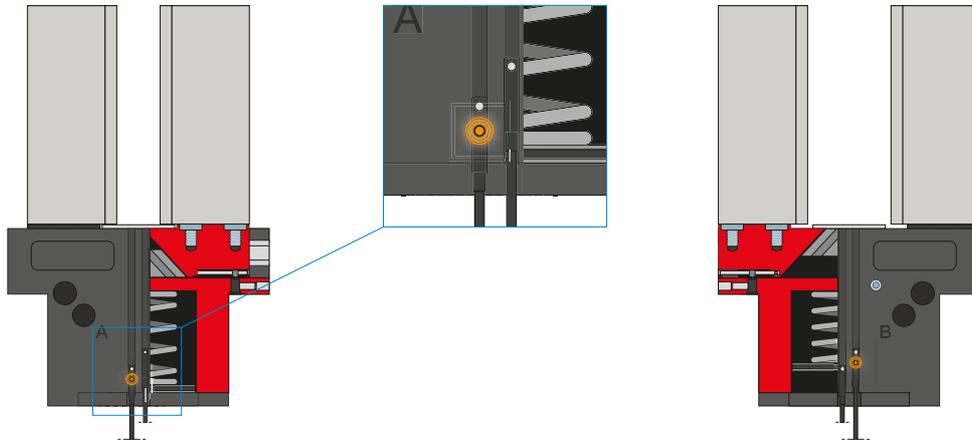

MFS01

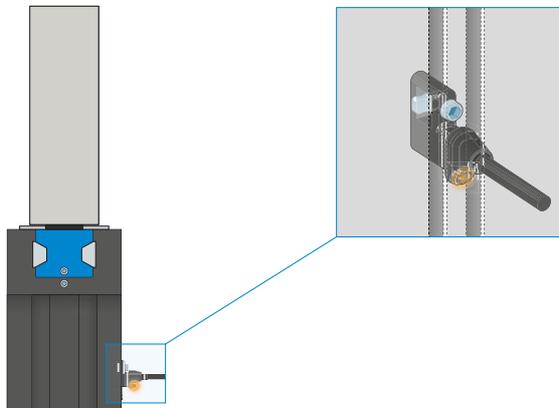

### 1-point magnetic field sensors – MFS

#### For non-contact sensing of the piston position

These sensors are installed in the C-groove of the gripper and detect the magnet attached to the piston of the gripper. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The variants are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.

# 2-JAW PARALLEL GRIPPERS


## SERIES GPP5000 FUNCTIONAL DESCRIPTION



### SENSORS

1

MFS02

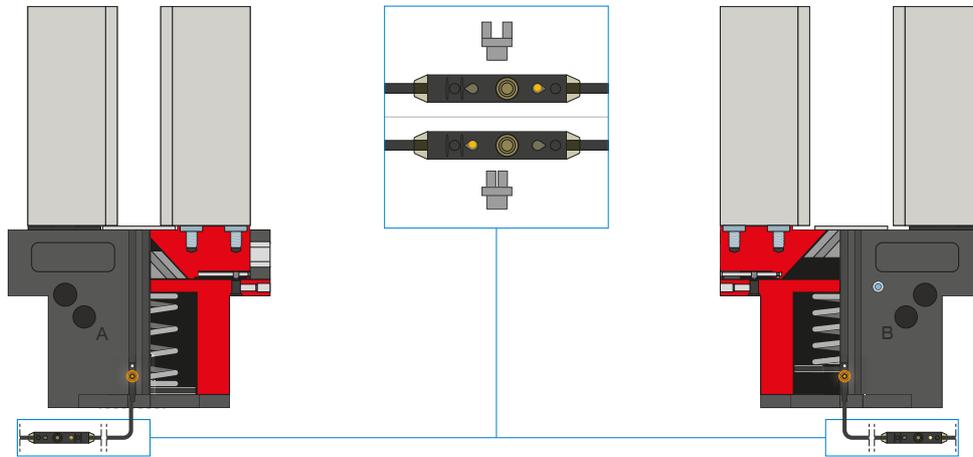


#### 2-point magnetic field sensors - MFS

With two freely programmable switching points

Using the programming unit integrated in the cable, two switch points can be freely defined for this sensor. To do so, the sensor is clamped in the C-groove, the gripper approaches position one and the position is taught in using the teach button. Afterwards, the second position is approached with the gripper and programmed. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.



### CONNECTIONS / OTHER

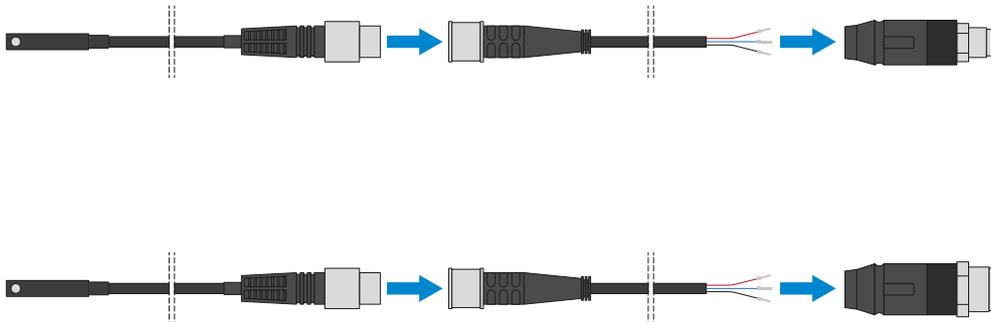


#### Plug-in connectors

For extending and fabricating the connection lines for the sensors

Cables with a length of 5 m with exposed leads are available. Depending on the specific needs, the cables can be shortened or fabricated with connectors in sizes M8 and M12.



## CONNECTIONS / OTHER

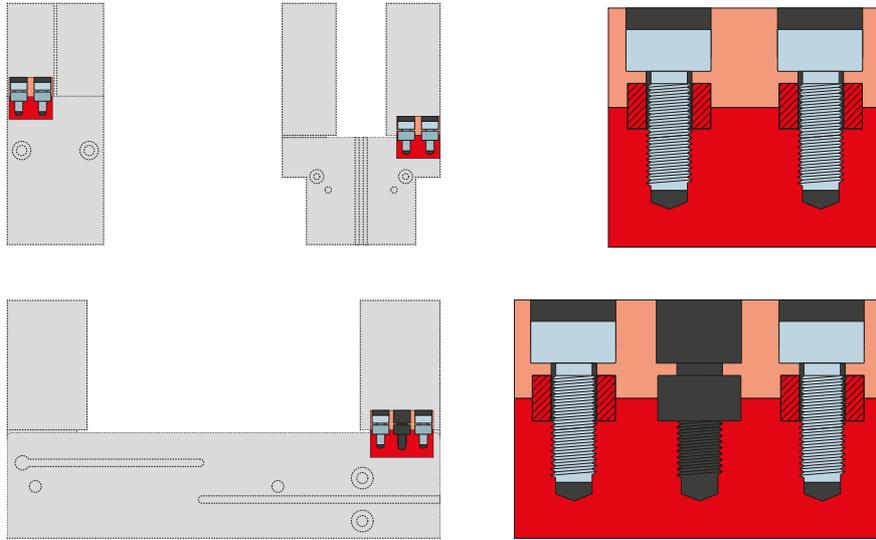

### Centering sleeves

#### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5003

### ▶ PRODUCT SPECIFICATIONS


1

Installation size GPP5003 / 2-Jaw Parallel Grippers / pneumatic / Grippers

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

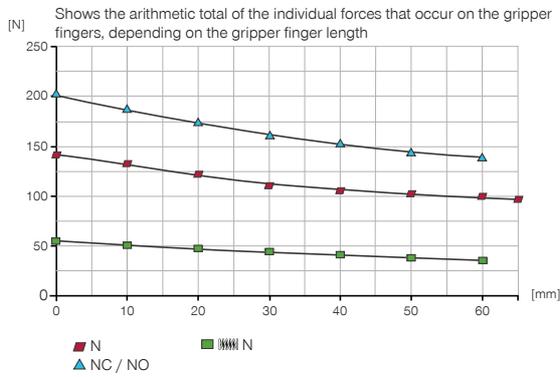

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

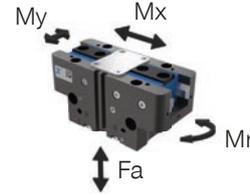


Mr [Nm]	7
Mx [Nm]	14
My [Nm]	13
Fa [N]	550

-AL-A


Steel / aluminum guide

#### ▶ Gripping force diagram

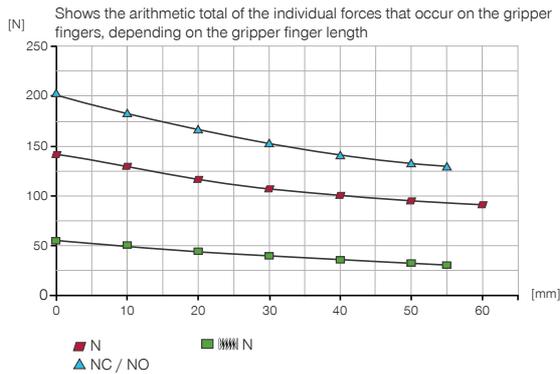

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

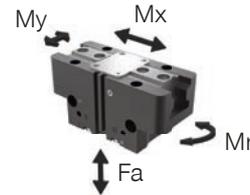

Mr [Nm]	6
Mx [Nm]	12
My [Nm]	12
Fa [N]	500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data		
	GPP5003N-00-A	GPP5003NC-00-A	GPP5003NO-00-A
Stroke per jaw [mm]	2.5	2.5	2.5
Gripping force in closing [N]	140	195	
Gripping force in opening [N]	150		205
Gripping force secured by spring min. [N]		55	55
Closing time [s]	0.01	0.01	0.025
Opening time [s]	0.01	0.025	0.01
Permissible weight per jaw max [kg]	0.12	0.12	0.12
Length of the gripper fingers max. [mm]	65	60	60
Repetition accuracy +/- [mm]	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4
Operating pressure max. [bar]	8	7	7
Nominal operating pressure [bar]	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	2.1	4.8	4.8
Protection to IEC 60529	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes
Weight [kg]	0.08	0.1	0.1

Order no.	▶ Technical Data - High Temperature Version		
	GPP5003N-20-A	GPP5003NC-20-A	GPP5003NO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130


Order no.	▶ Technical Data - Protector Version		
	GPP5003N-21-A	GPP5003NC-21-A	GPP5003NO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*
Weight [kg]	0.1	0.12	0.12

Order no.	▶ Technical Data - High Temperature Protector Version		
	GPP5003N-24-A	GPP5003NC-24-A	GPP5003NO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*
Weight [kg]	0.1	0.12	0.12


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5003N-AL-A	GPP5003NC-AL-A	GPP5003NO-AL-A
Permissible weight per jaw max [kg]	0.1	0.1	0.1
Length of the gripper fingers max. [mm]	60	55	55
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.08	0.1	0.1

### ▶ Maximum gripper finger length

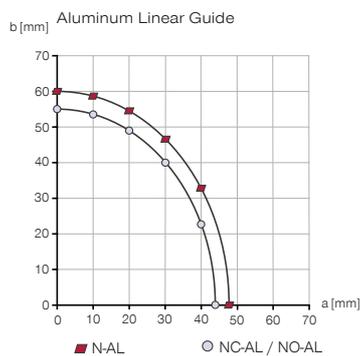

### ▶ Resulting gripper finger length for determining the gripping force

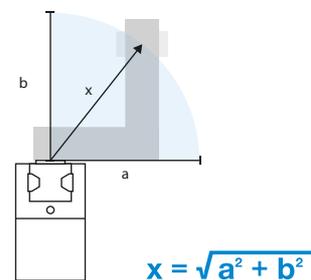


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5003


### TECHNICAL DRAWINGS

NC / NO  
-00-A / -20-A / -AL-A

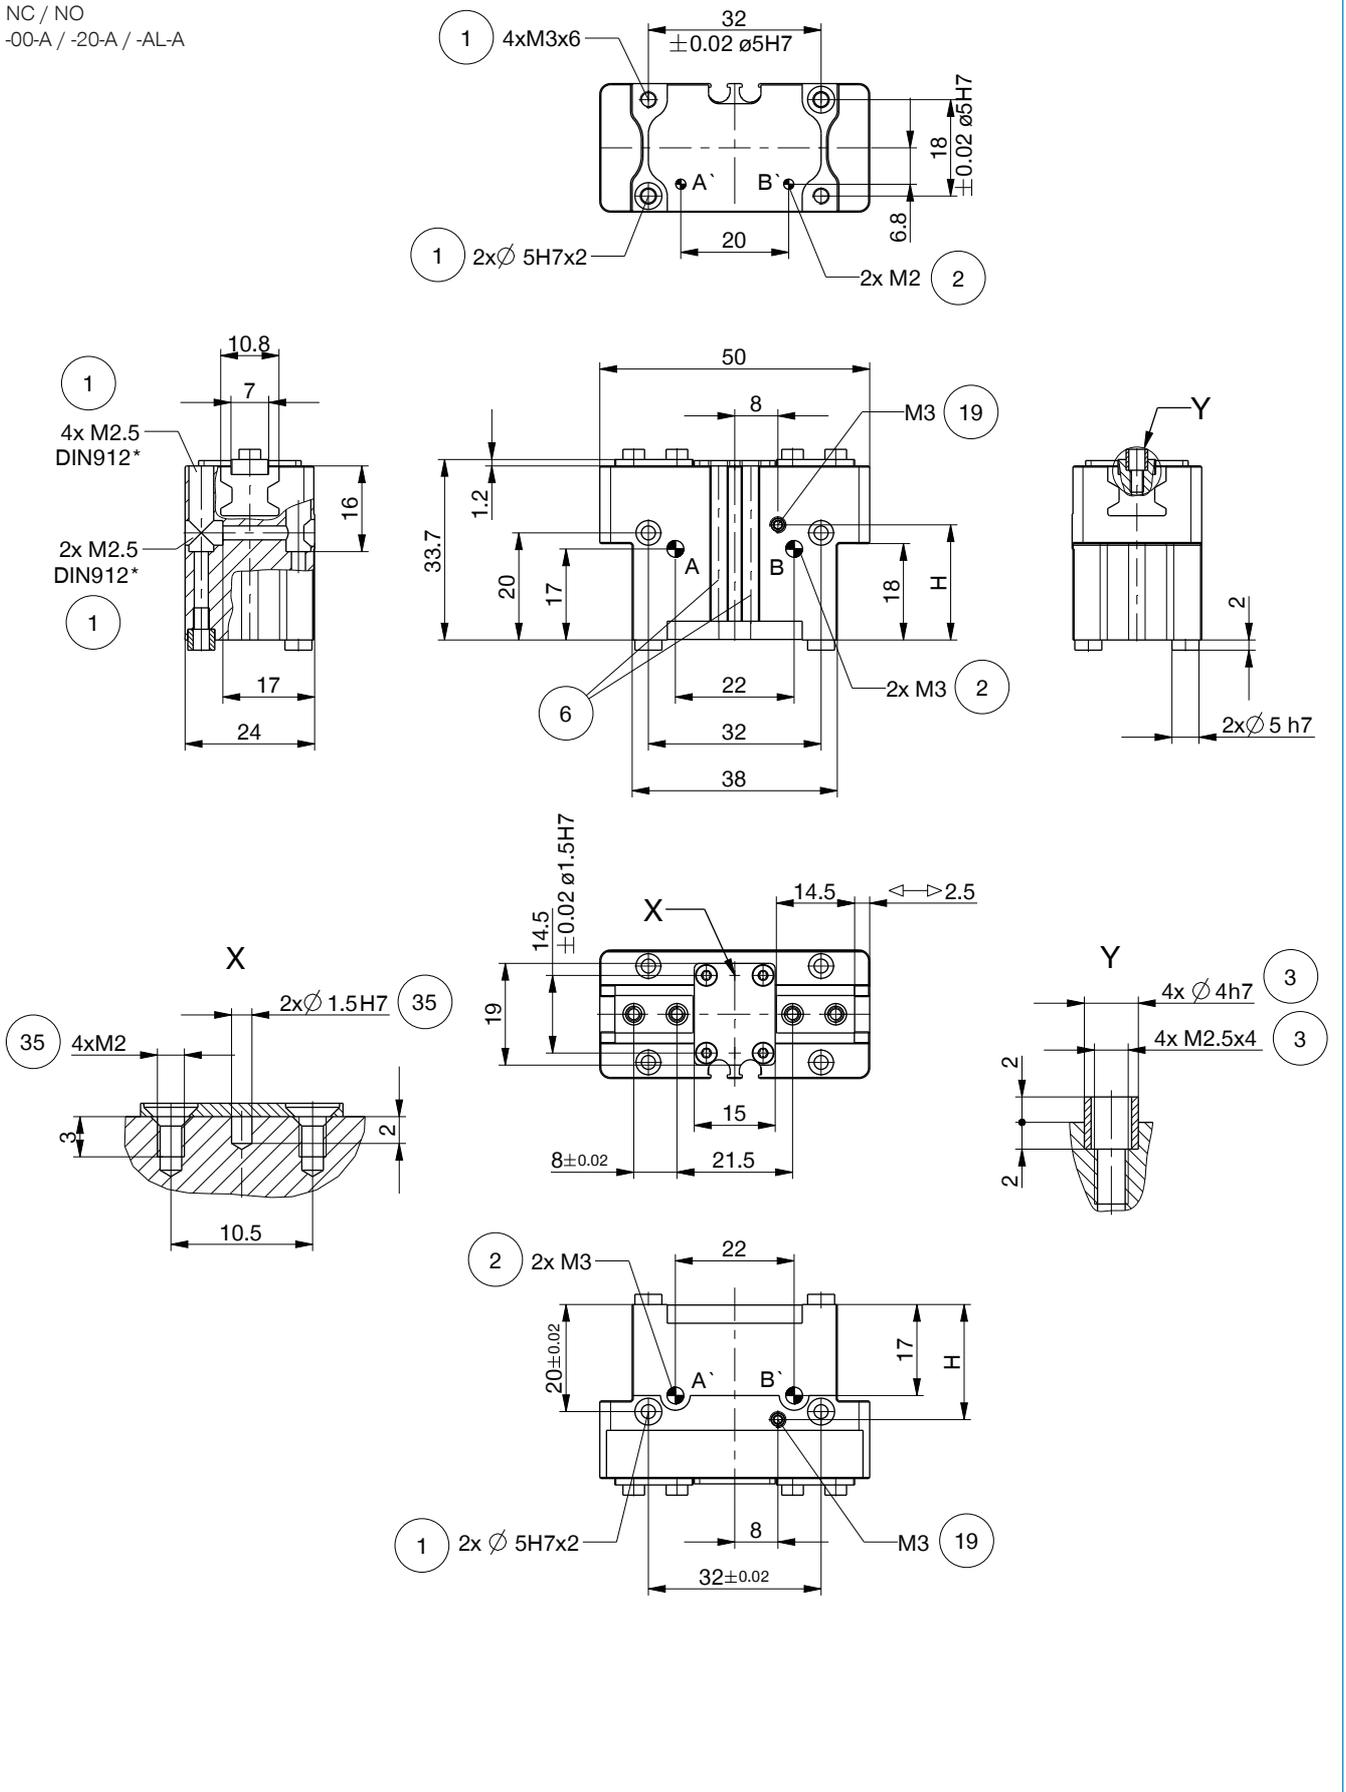


► TECHNICAL DRAWINGS


N  
-00-A / -20-A / -AL-A

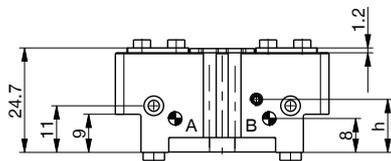


N / NC / NO  
-21-A / -24-A

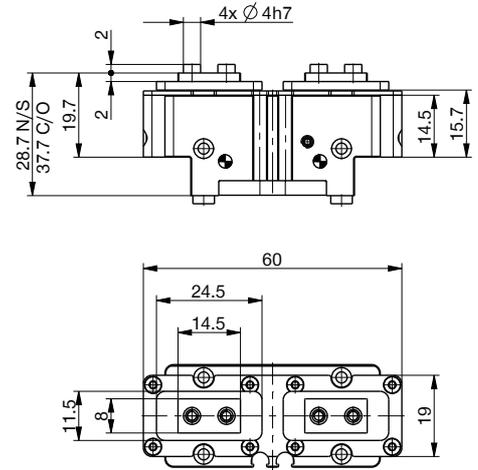

Hoseless air feed-through M2

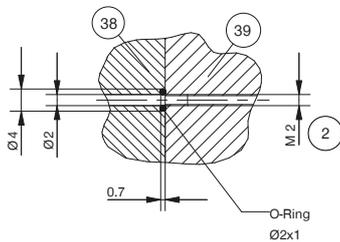

Hoseless air feed-through M3

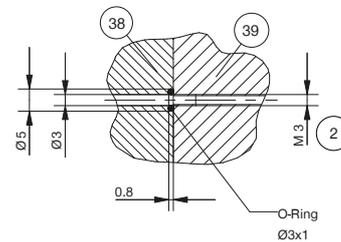

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉘ Adapter
- ㉙ Gripper
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

► Position ⑱ sealing air connection option

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	21.5	27.8
h [mm]	12.5	18.8




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5003

### ▶ ACCESSORIES

1

Installation size GPP5003 / 2-Jaw Parallel Grippers / pneumatic / Grippers

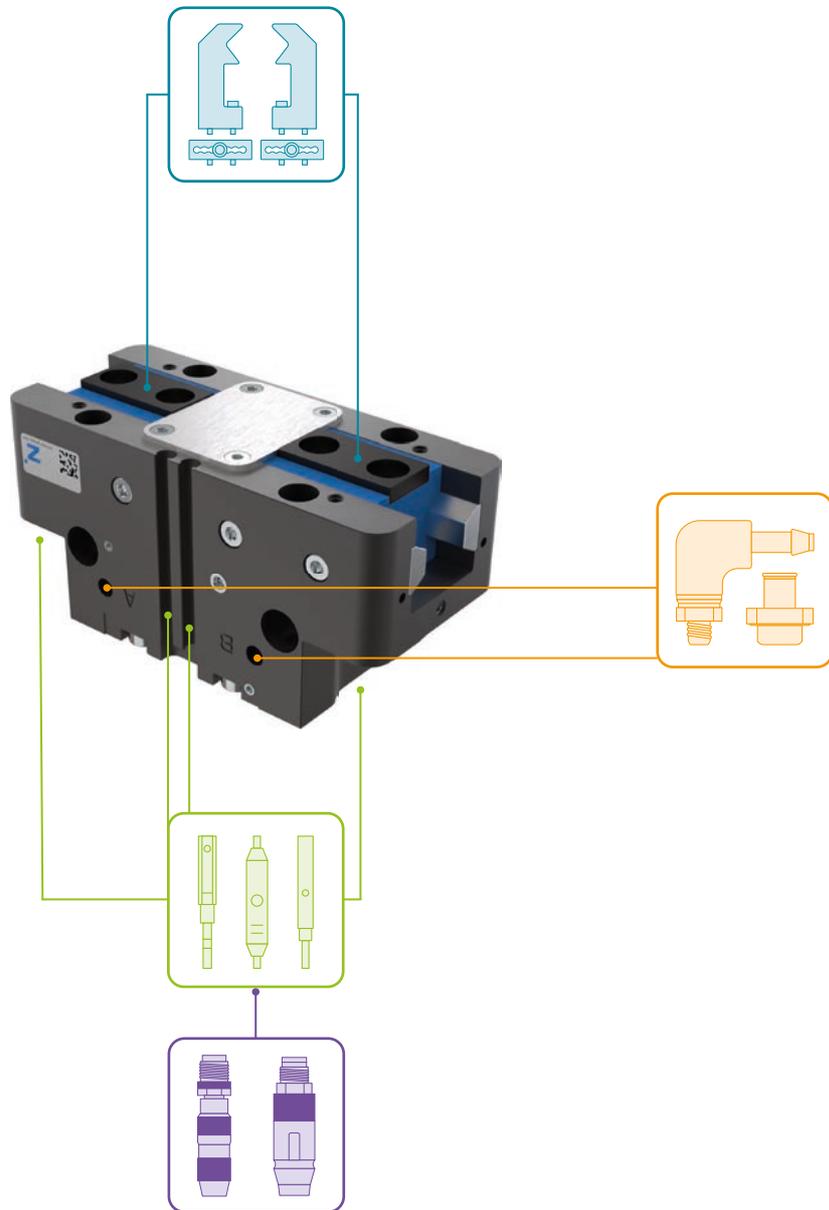

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

DST06510



2 [piece]  
Centering Disc

015761

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5003AL**  
Universal jaw aluminium



**UB5003ST**  
Universal jaw steel



**KF50N**  
Rubber Coated Tape  
Knobbed



**EB5003AL**  
Aluminum adjustment jaw



**EB5003ST**  
Steel adjustment jaw



ENERGY SUPPLY



**GVM3**  
Straight Fittings - Barb  
Style Connection



**WVM3**  
Angled Fittings - Barb  
Style Connection



**DEV04**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with  
quick exhaust



SENSORS



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Ca-  
ble 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customiz-  
able Straight - Connector M8



**S12-G-3**  
Plug-in connector customiz-  
able Straight - Connector M12

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5004

### ▶ PRODUCT SPECIFICATIONS


1

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

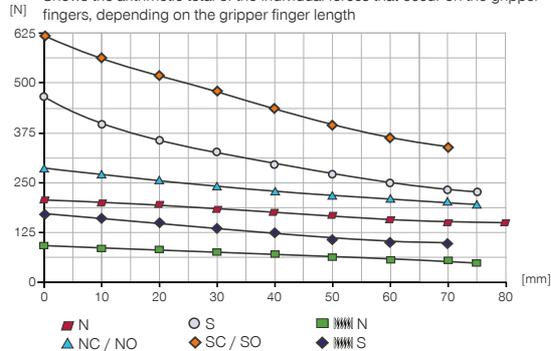

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

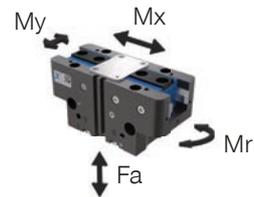


Mr [Nm]	14
Mx [Nm]	29
My [Nm]	23
Fa [N]	750

-AL-A

Steel / aluminum guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

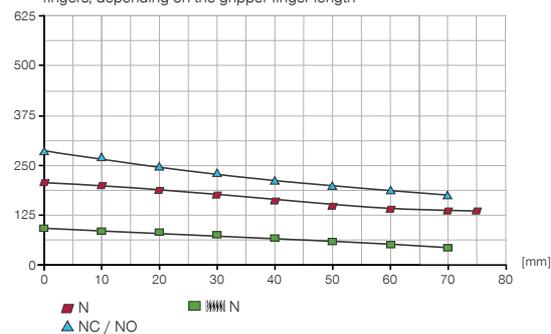

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

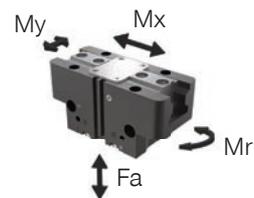

Mr [Nm]	10
Mx [Nm]	25
My [Nm]	20
Fa [N]	700

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5004N-00-A	GPP5004NC-00-A	GPP5004NO-00-A	GPP5004S-00-A	GPP5004SC-00-A	GPP5004SO-00-A
Stroke per jaw [mm]	4	4	4	2	2	2
Gripping force in closing [N]	200	280		440	600	
Gripping force in opening [N]	215		295	470		630
Gripping force secured by spring min. [N]		80	80		160	160
Closing time [s]	0.015	0.015	0.025	0.015	0.015	0.025
Opening time [s]	0.015	0.025	0.015	0.015	0.025	0.015
Permissible weight per jaw max [kg]	0.2	0.2	0.2	0.2	0.2	0.2
Length of the gripper fingers max. [mm]	80	75	75	75	70	70
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	5	12	12	5	12	12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	0.16	0.21	0.21	0.16	0.21	0.21

Order no.	▶ Technical Data - High Temperature Version					
	GPP5004N-20-A	GPP5004NC-20-A	GPP5004NO-20-A	GPP5004S-20-A	GPP5004SC-20-A	GPP5004SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130



Order no.	▶ Technical Data - Protector Version					
	GPP5004N-21-A	GPP5004NC-21-A	GPP5004NO-21-A	GPP5004S-21-A	GPP5004SC-21-A	GPP5004SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.25	0.3	0.3	0.25	0.3	0.3

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5004N-24-A	GPP5004NC-24-A	GPP5004NO-24-A	GPP5004S-24-A	GPP5004SC-24-A	GPP5004SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.25	0.3	0.3	0.25	0.3	0.3


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5004N-AL-A	GPP5004NC-AL-A	GPP5004NO-AL-A
Permissible weight per jaw max [kg]	0.18	0.18	0.18
Length of the gripper fingers max. [mm]	75	70	70
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.15	0.2	0.2

### ▶ Maximum gripper finger length

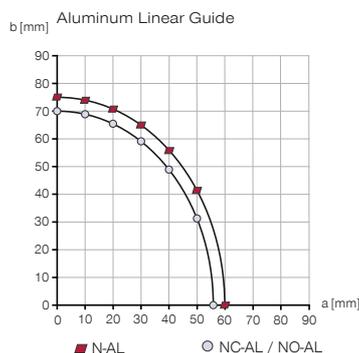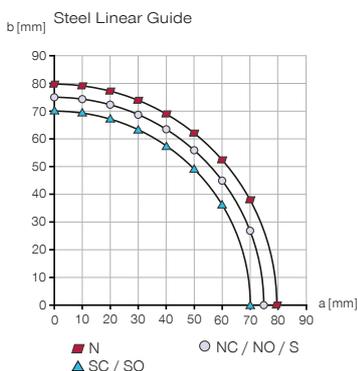

### ▶ Resulting gripper finger length for determining the gripping force

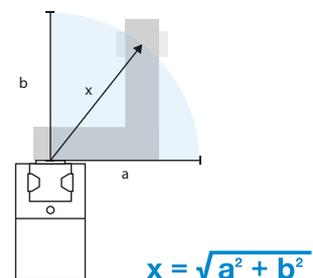


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5004


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

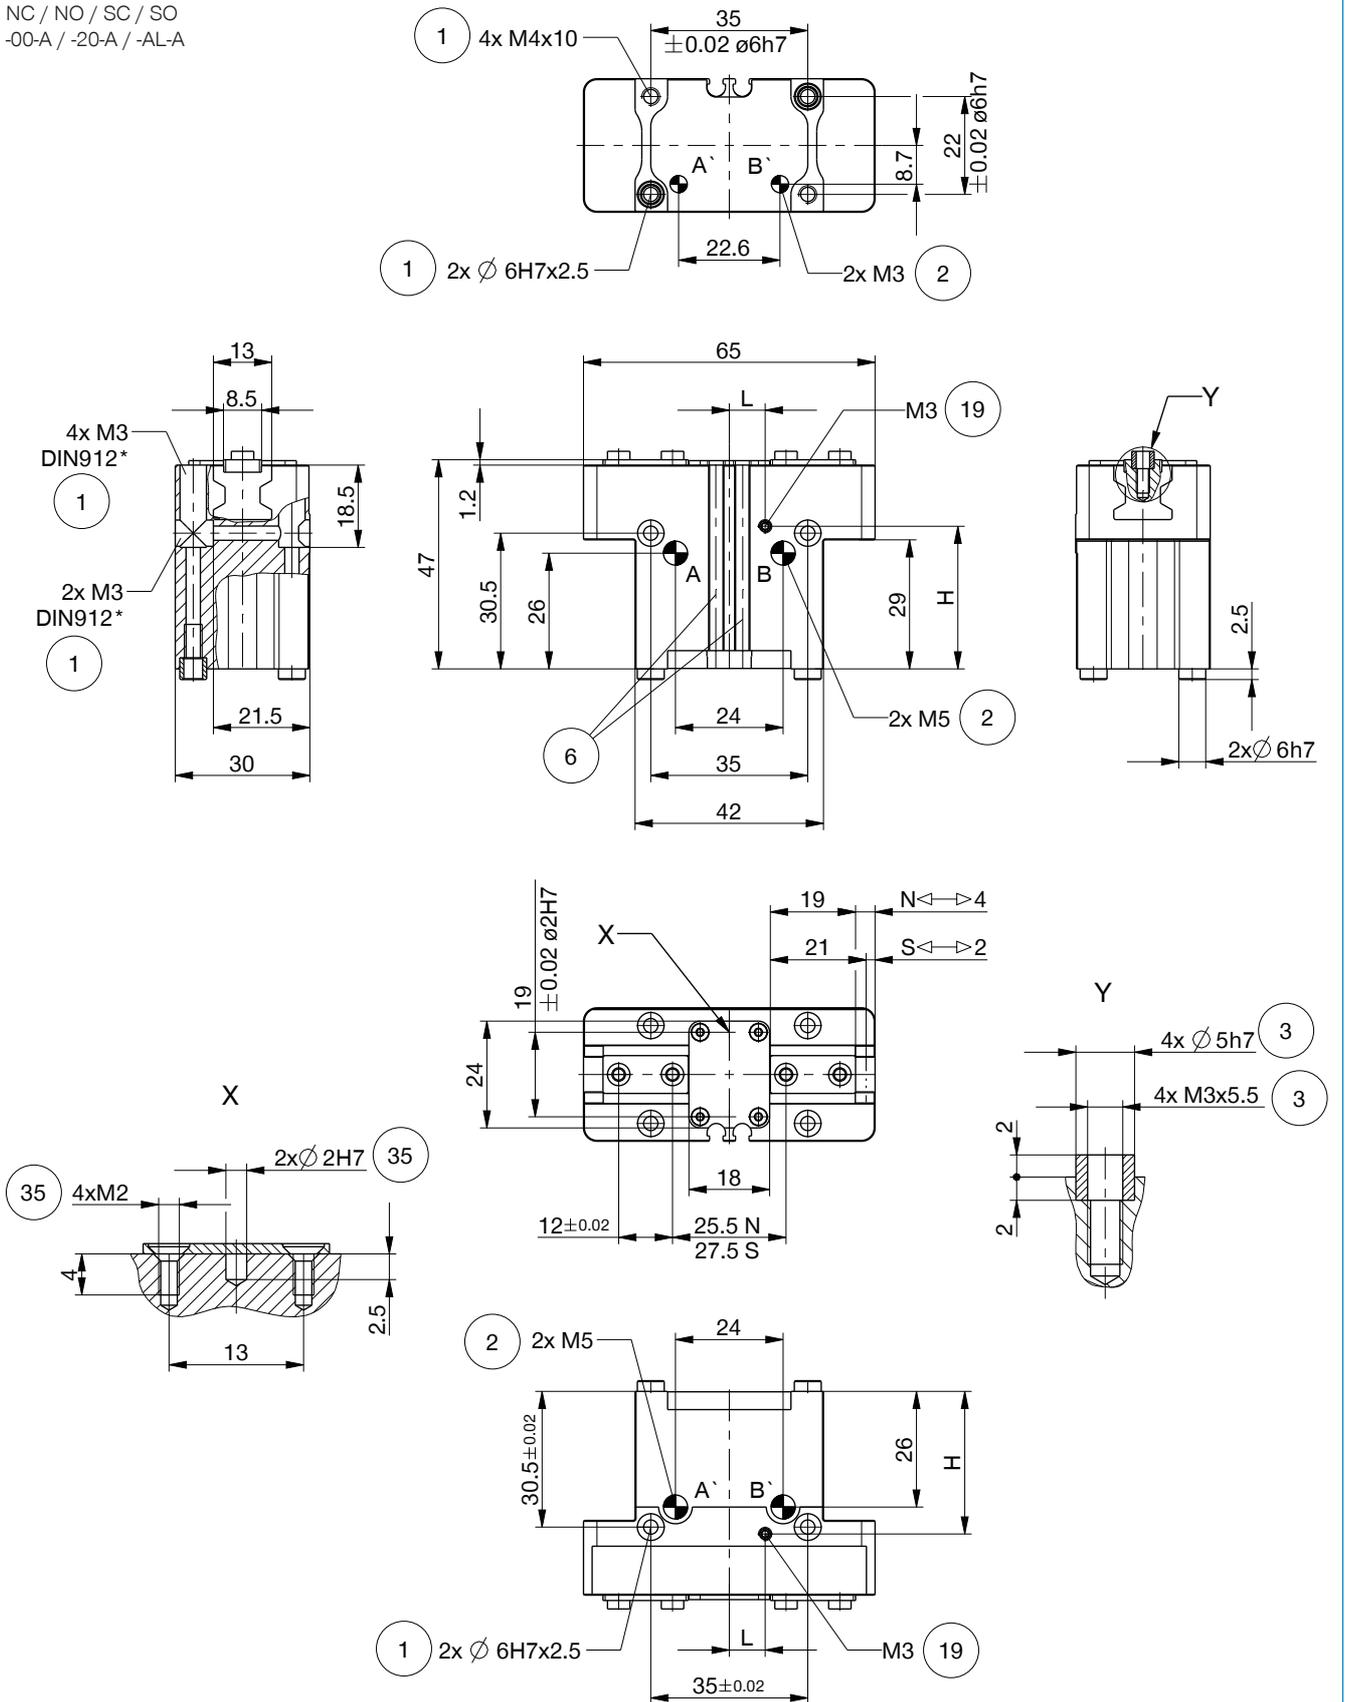


**TECHNICAL DRAWINGS**


N / S  
-00-A / -20-A / -AL-A

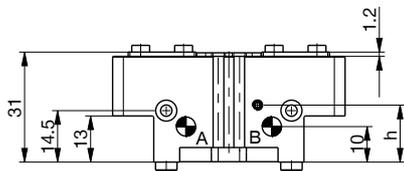


N / NC / NO / S / SC / SO  
-21-A / -24-A

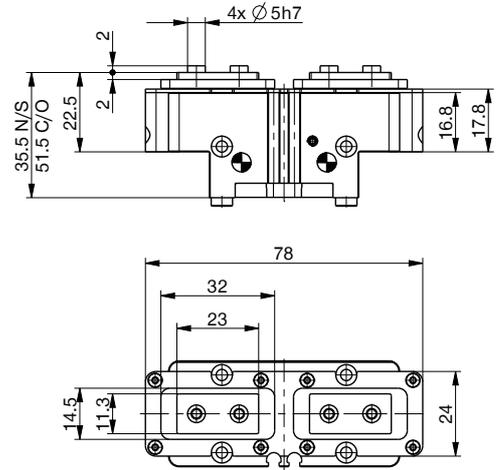

Hoseless air feed-through M3

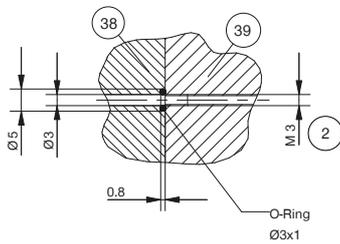

Hoseless air feed-through M5

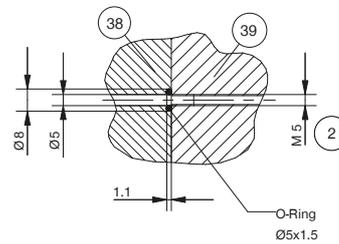

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ⑳ Adapter
- ⑳ Gripper
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

**► Position ⑱ sealing air connection option**

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	32	39.6
L [mm]	9	8
h [mm]	16	23.6




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5004

### ▶ ACCESSORIES

1

Installation size GPP5004 / 2-Jaw Parallel Grippers / pneumatic / Grippers

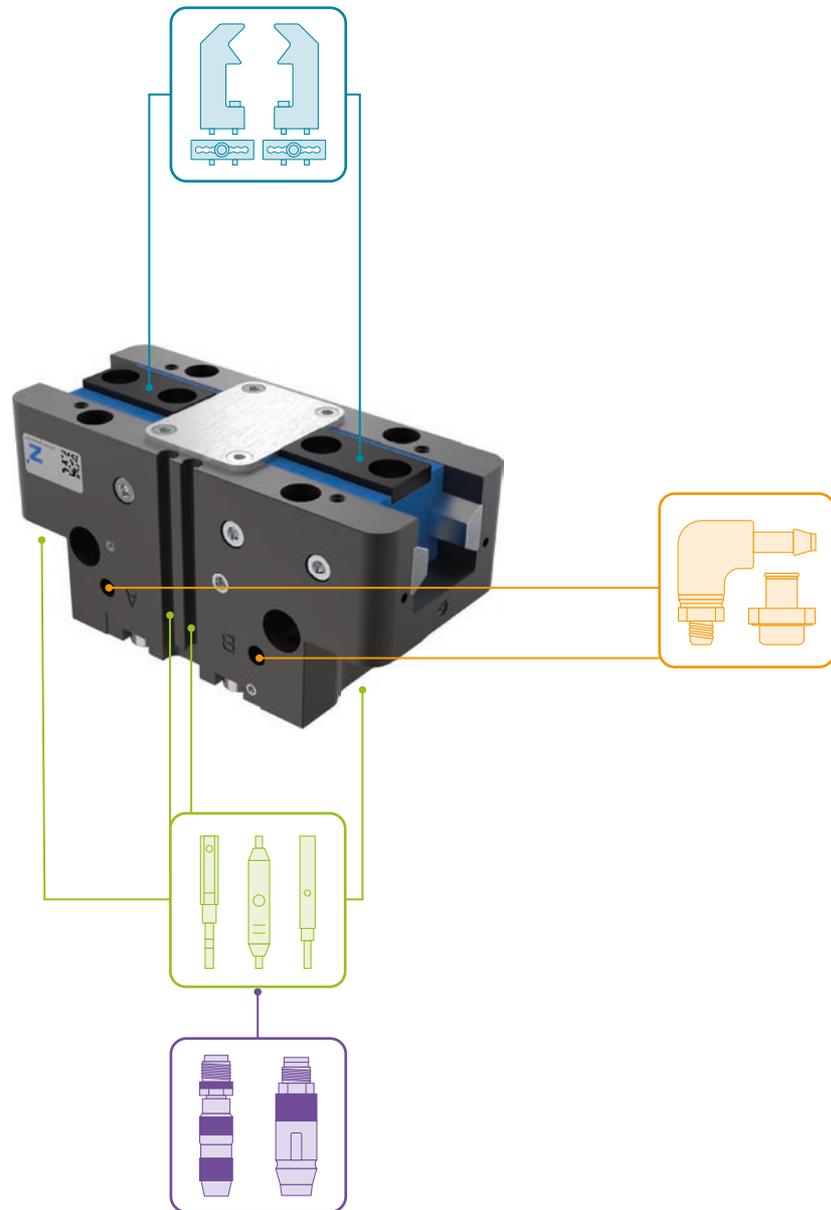

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

015761



2 [piece]  
Centering Disc

024230

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5004AL**  
Universal jaw aluminium



**UB5004ST**  
Universal jaw steel



**EB5004AL**  
Aluminum adjustment jaw



**EB5004ST**  
Steel adjustment jaw



**WB5004L**  
Changeable jaw, loose-part-set



**WB5004F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**WVM5**  
Angled Fittings - Quick Connect Style



**DEV04**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5006


### ▶ PRODUCT SPECIFICATIONS

1

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

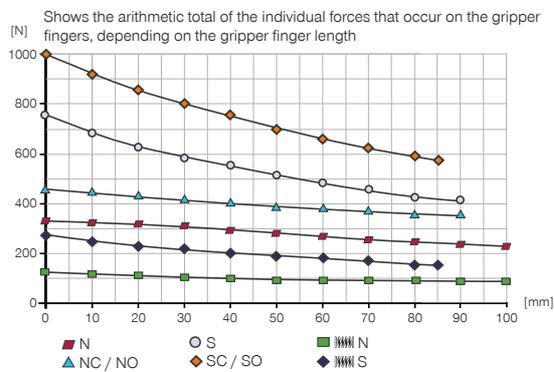

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

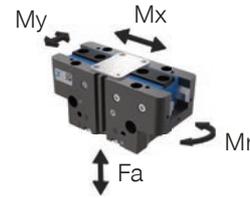


Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250

-AL-A


Steel / aluminum guide

#### ▶ Gripping force diagram

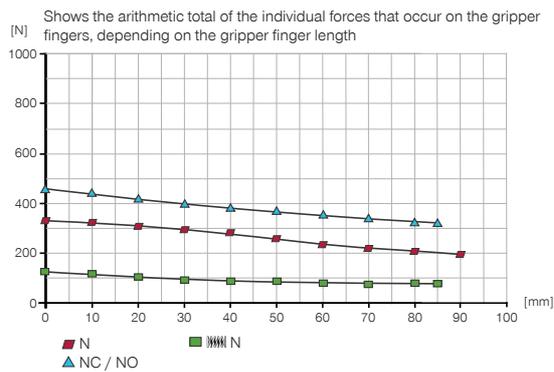

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

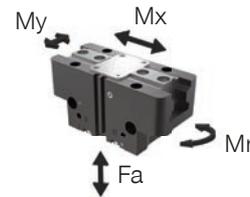

Mr [Nm]	40
Mx [Nm]	60
My [Nm]	45
Fa [N]	1200

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5006N-00-A	GPP5006NC-00-A	GPP5006NO-00-A	GPP5006S-00-A	GPP5006SC-00-A	GPP5006SO-00-A
Stroke per jaw [mm]	6	6	6	3	3	3
Gripping force in closing [N]	330	455		740	1020	
Gripping force in opening [N]	360		485	800		1080
Gripping force secured by spring min. [N]		125	125		280	280
Closing time [s]	0.025	0.015	0.035	0.025	0.015	0.035
Opening time [s]	0.025	0.035	0.015	0.025	0.035	0.015
Permissible weight per jaw max [kg]	0.4	0.4	0.4	0.4	0.4	0.4
Length of the gripper fingers max. [mm]	100	90	90	90	85	85
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	11	24	24	11	24	24
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	0.28	0.35	0.35	0.28	0.35	0.35

Order no.	▶ Technical Data - High Temperature Version					
	GPP5006N-20-A	GPP5006NC-20-A	GPP5006NO-20-A	GPP5006S-20-A	GPP5006SC-20-A	GPP5006SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130


Order no.	▶ Technical Data - Protector Version					
	GPP5006N-21-A	GPP5006NC-21-A	GPP5006NO-21-A	GPP5006S-21-A	GPP5006SC-21-A	GPP5006SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.37	0.44	0.44	0.37	0.44	0.44

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5006N-24-A	GPP5006NC-24-A	GPP5006NO-24-A	GPP5006S-24-A	GPP5006SC-24-A	GPP5006SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.37	0.44	0.44	0.37	0.44	0.44



\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5006N-AL-A	GPP5006NC-AL-A	GPP5006NO-AL-A
Permissible weight per jaw max [kg]	0.35	0.35	0.35
Length of the gripper fingers max. [mm]	90	85	85
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.28	0.35	0.35

### ▶ Maximum gripper finger length

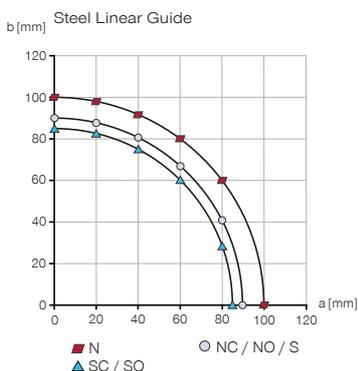

### ▶ Resulting gripper finger length for determining the gripping force

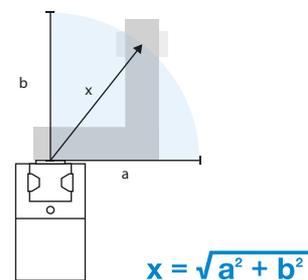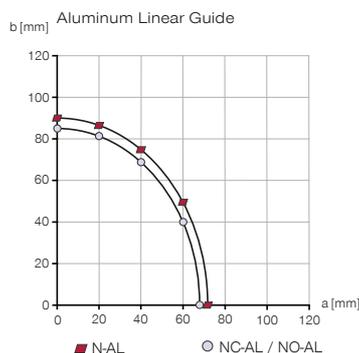


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5006


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

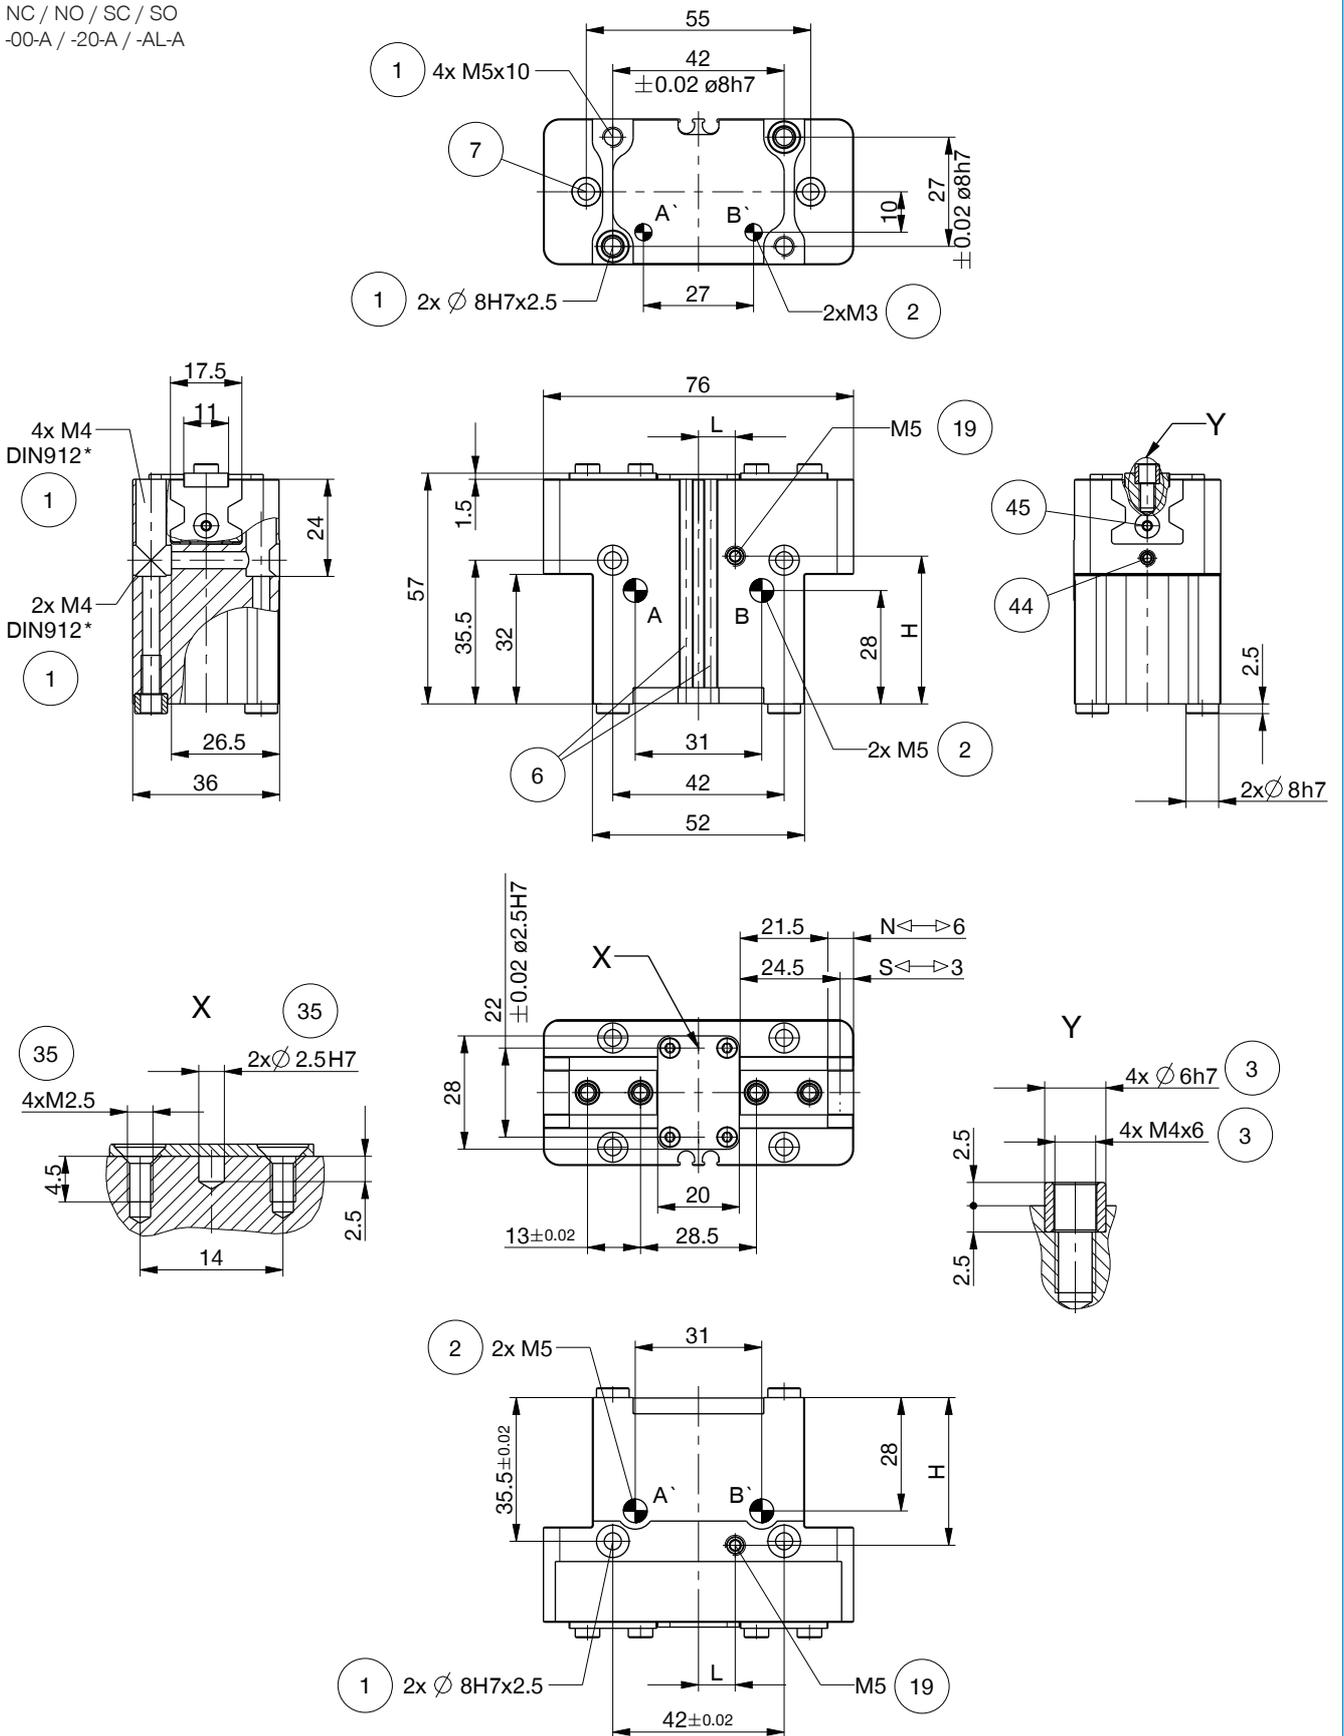


**TECHNICAL DRAWINGS**


N / S  
-00-A / -20-A / -AL-A

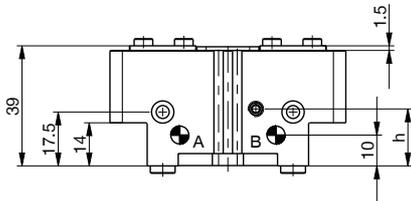


N / NC / NO / S / SC / SO  
-21-A / -24-A

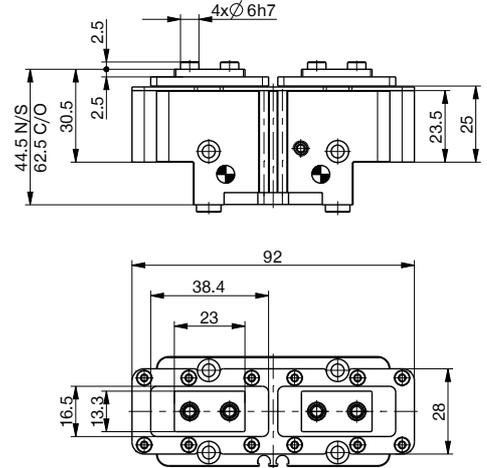

Hoseless air feed-through M3

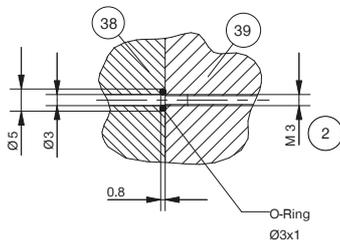

Hoseless air feed-through M5

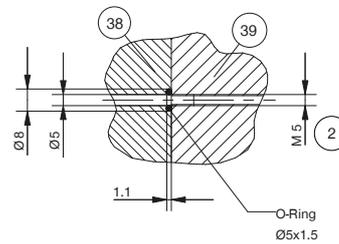

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑦ Mounting block (not for variant AL-A)
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉔ Adapter
- ㉙ Gripper
- ㉚ Clamping sensor (not for variant AL-A)
- ㉛ Switch cam adjustment (not for variant AL-A)
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

**► Position ⑱ sealing air connection option**

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	36.5	47.7
L [mm]	9	11
h [mm]	18.5	29.7




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5006

### ▶ ACCESSORIES

1

Installation size GPP5006 / 2-Jaw Parallel Grippers / pneumatic / Grippers

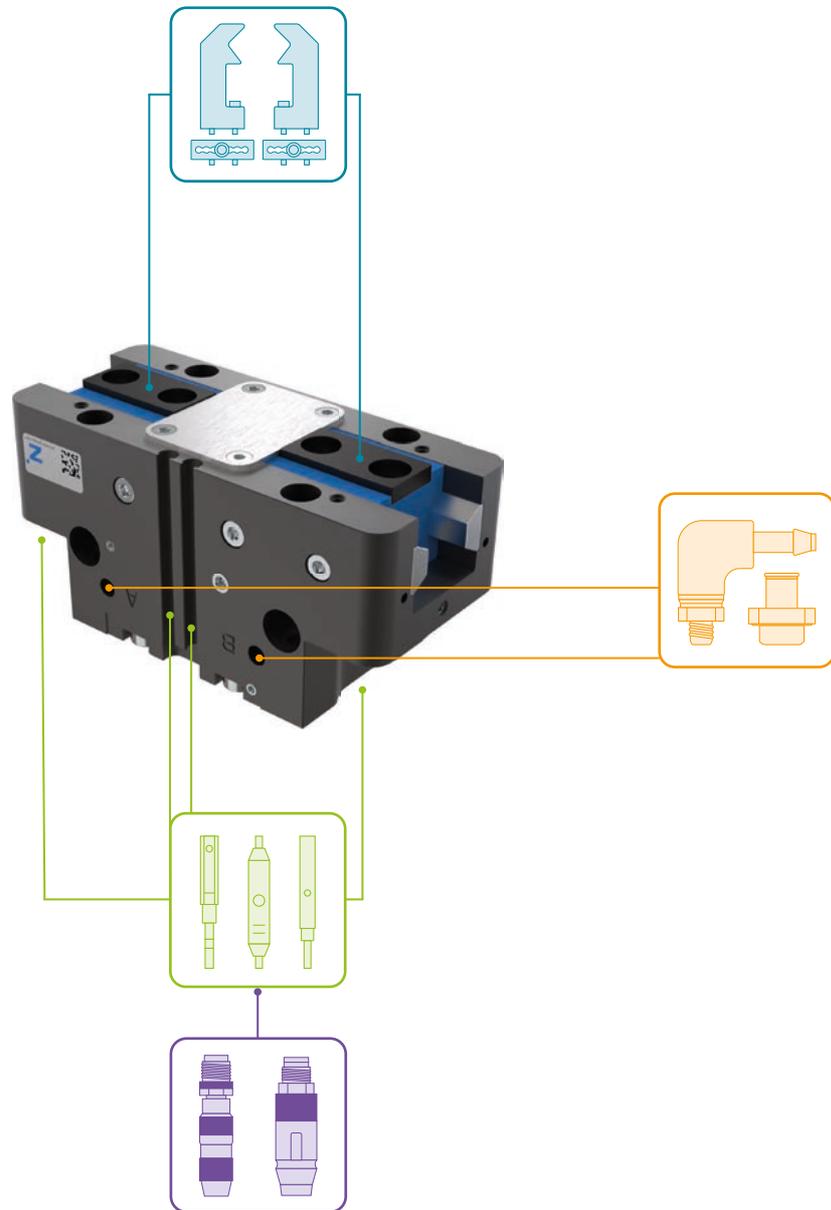

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

024230



2 [piece]  
Centering Disc

024231

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8




**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

\* Not for variant AL-A



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Ca-  
ble 5m - Socket M8 (female)

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5008


### ▶ PRODUCT SPECIFICATIONS

1

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

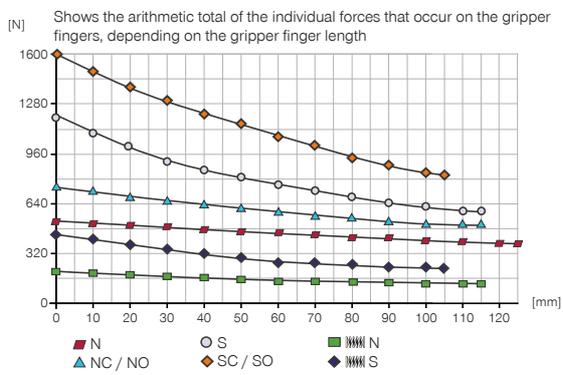

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

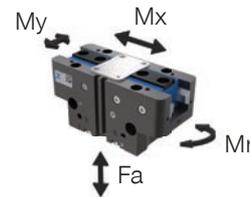


Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

-AL-A


Steel / aluminum guide

#### ▶ Gripping force diagram

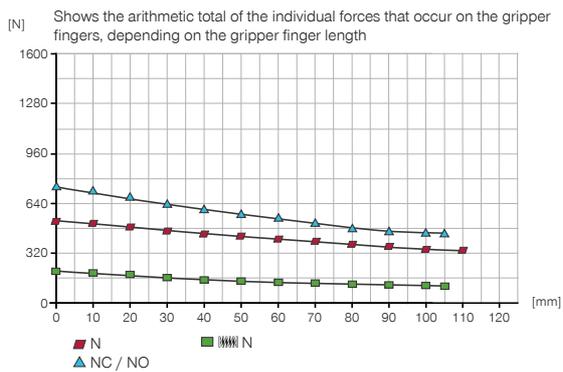

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

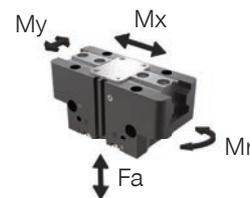

Mr [Nm]	55
Mx [Nm]	95
My [Nm]	60
Fa [N]	1800

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5008N-00-A	GPP5008NC-00-A	GPP5008NO-00-A	GPP5008S-00-A	GPP5008SC-00-A	GPP5008SO-00-A
Stroke per jaw [mm]	8	8	8	4	4	4
Gripping force in closing [N]	520	710		1150	1580	
Gripping force in opening [N]	560		750	1240		1670
Gripping force secured by spring min. [N]		190	190		430	430
Closing time [s]	0.035	0.025	0.045	0.035	0.025	0.045
Opening time [s]	0.035	0.045	0.025	0.035	0.045	0.025
Permissible weight per jaw max [kg]	0.7	0.7	0.7	0.7	0.7	0.7
Length of the gripper fingers max. [mm]	125	115	115	115	105	105
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	22	43	43	22	43	43
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	0.53	0.63	0.63	0.53	0.63	0.63

Order no.	▶ Technical Data - High Temperature Version					
	GPP5008N-20-A	GPP5008NC-20-A	GPP5008NO-20-A	GPP5008S-20-A	GPP5008SC-20-A	GPP5008SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130



Order no.	▶ Technical Data - Protector Version					
	GPP5008N-21-A	GPP5008NC-21-A	GPP5008NO-21-A	GPP5008S-21-A	GPP5008SC-21-A	GPP5008SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.66	0.76	0.76	0.66	0.76	0.76

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5008N-24-A	GPP5008NC-24-A	GPP5008NO-24-A	GPP5008S-24-A	GPP5008SC-24-A	GPP5008SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.66	0.76	0.76	0.66	0.76	0.76


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5008N-AL-A	GPP5008NC-AL-A	GPP5008NO-AL-A
Permissible weight per jaw max [kg]	0.6	0.6	0.6
Length of the gripper fingers max. [mm]	110	105	105
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.53	0.61	0.61

### ▶ Maximum gripper finger length

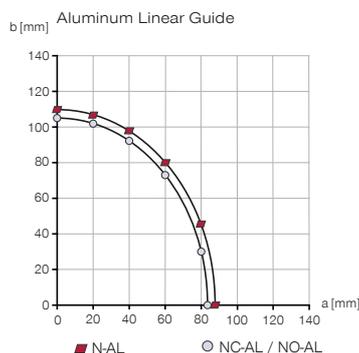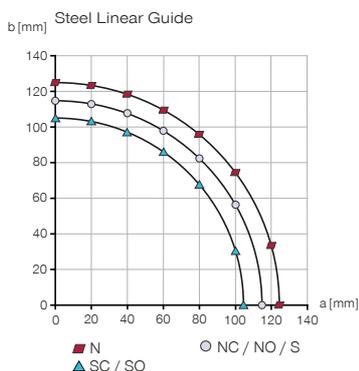

### ▶ Resulting gripper finger length for determining the gripping force

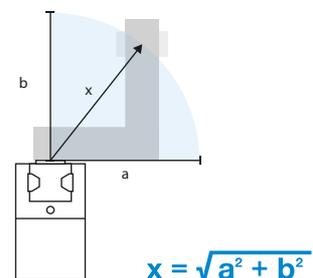


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5008


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

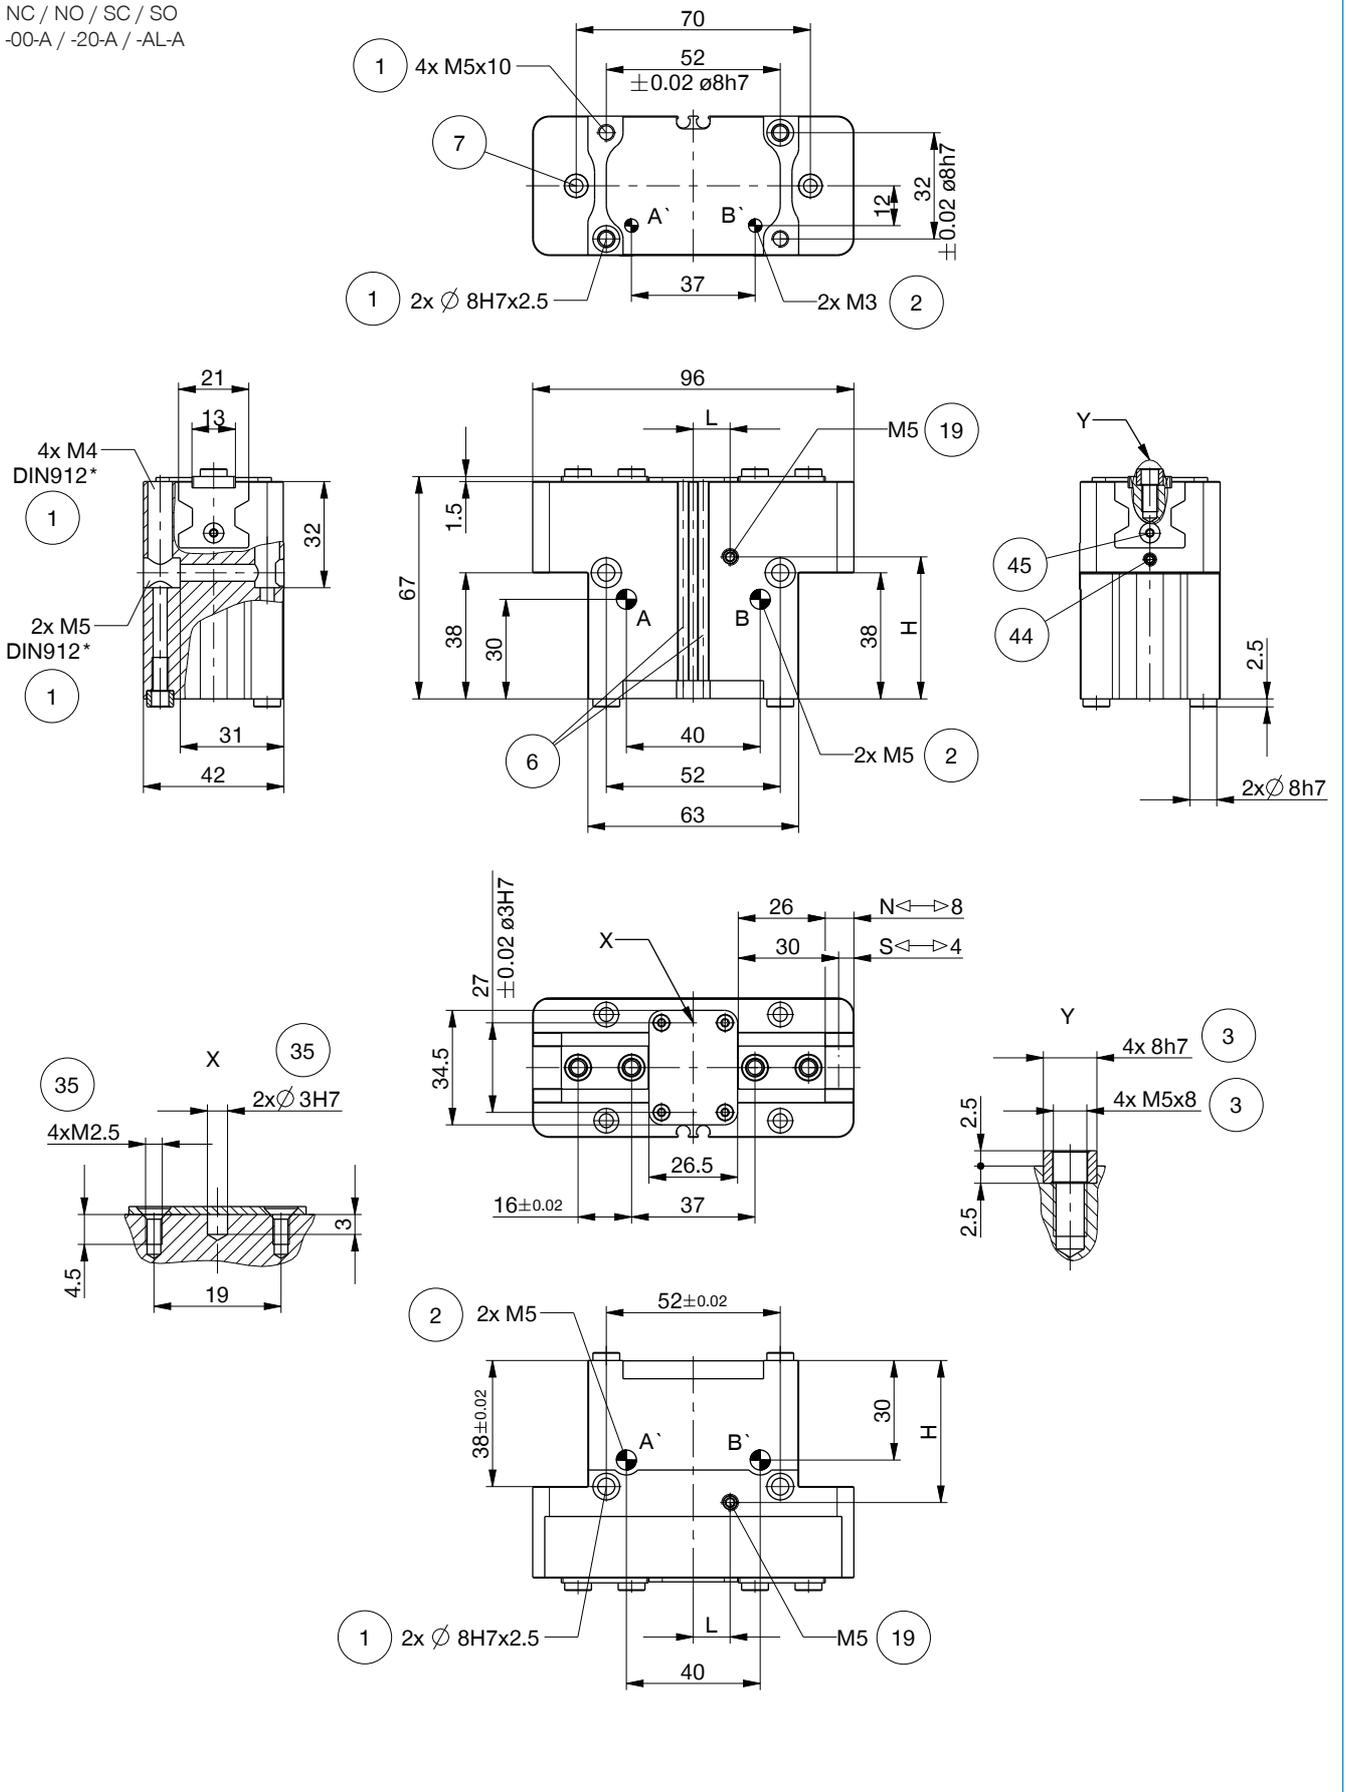


**▶ TECHNICAL DRAWINGS**


N / S  
-00-A / -20-A / -AL-A

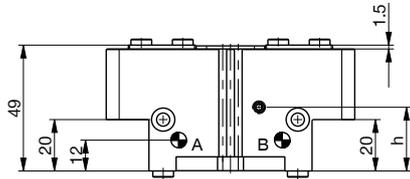


N / NC / NO / S / SC / SO  
-21-A / -24-A

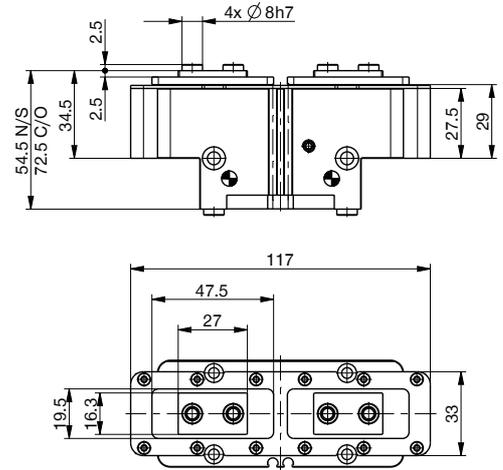

Hoseless air feed-through M3

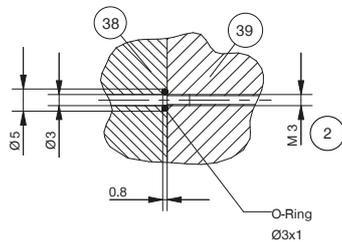

Hoseless air feed-through M5

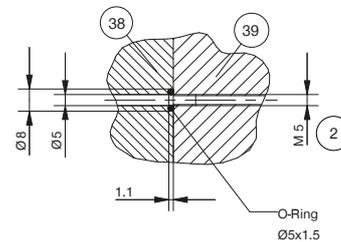

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑦ Mounting block (not for variant AL-A)
- ⑰ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉔ Adapter
- ㉙ Gripper
- ㉛ Clamping sensor (not for variant AL-A)
- ㉜ Switch cam adjustment (not for variant AL-A)
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

**▶ Position ⑰ sealing air connection option**

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	42.8	55.7
L [mm]	11	9
h [mm]	24.8	37.7




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5008

### ▶ ACCESSORIES

1

Installation size GPP5008 / 2-Jaw Parallel Grippers / pneumatic / Grippers

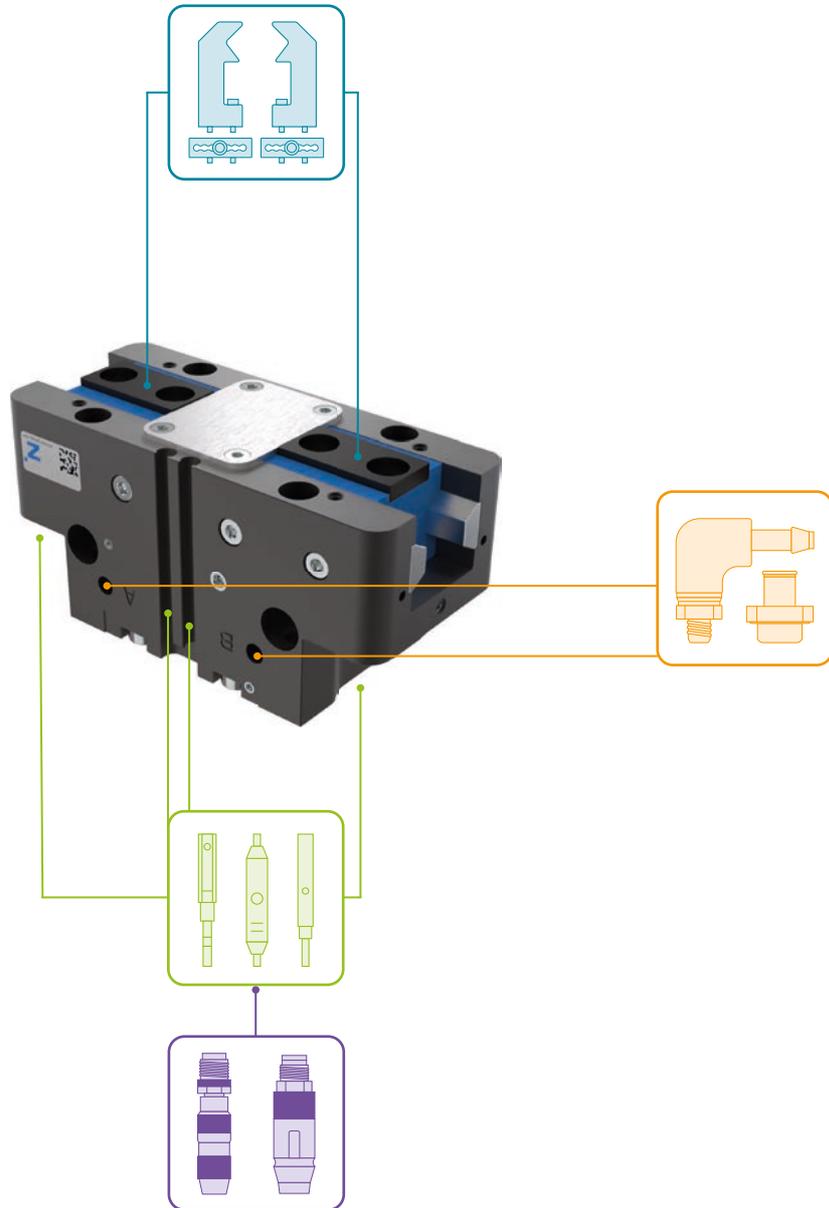

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8




**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

\* Not for variant AL-A



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Ca-  
ble 5m - Socket M8 (female)

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5010

### ▶ PRODUCT SPECIFICATIONS


1 Installation size GPP5010 / 2-Jaw Parallel Grippers / pneumatic / Grippers

#### -00-A / -20-A / -21-A / -24-A

##### Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

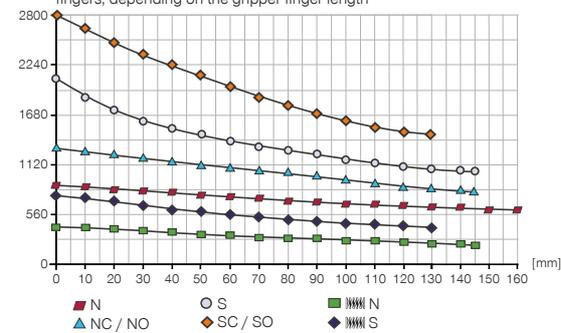

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

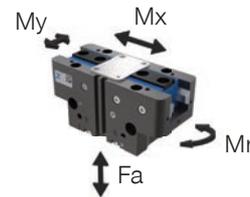


Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700

#### -AL-A

##### Steel / aluminum guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

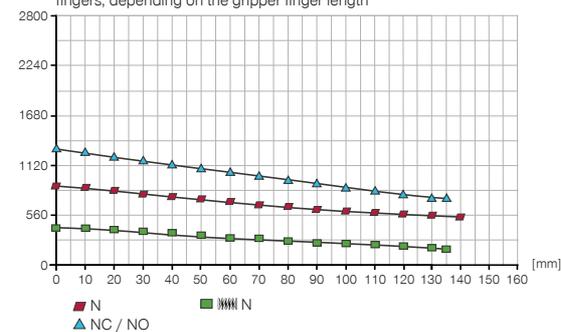

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

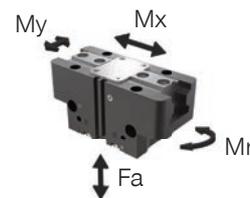

Mr [Nm]	75
Mx [Nm]	115
My [Nm]	90
Fa [N]	2500

### ▶ VARIANTS

#### -00-A / -20-A

Steel / steel guide

#### -21-A / -24-A

Steel / steel guide

#### -AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5010N-00-A	GPP5010NC-00-A	GPP5010NO-00-A	GPP5010S-00-A	GPP5010SC-00-A	GPP5010SO-00-A
Stroke per jaw [mm]	10	10	10	5	5	5
Gripping force in closing [N]	885	1260		1940	2750	
Gripping force in opening [N]	945		1320	2080		2890
Gripping force secured by spring min. [N]		375	375		810	810
Closing time [s]	0.06	0.05	0.08	0.06	0.05	0.08
Opening time [s]	0.06	0.08	0.05	0.06	0.08	0.05
Permissible weight per jaw max [kg]	1.3	1.3	1.3	1.3	1.3	1.3
Length of the gripper fingers max. [mm]	160	145	145	145	130	130
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	44	92	92	44	92	92
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	0.87	1.09	1.09	0.87	1.09	1.09

Order no.	▶ Technical Data - High Temperature Version					
	GPP5010N-20-A	GPP5010NC-20-A	GPP5010NO-20-A	GPP5010S-20-A	GPP5010SC-20-A	GPP5010SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130



Order no.	▶ Technical Data - Protector Version					
	GPP5010N-21-A	GPP5010NC-21-A	GPP5010NO-21-A	GPP5010S-21-A	GPP5010SC-21-A	GPP5010SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.09	1.31	1.31	1.09	1.31	1.31

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5010N-24-A	GPP5010NC-24-A	GPP5010NO-24-A	GPP5010S-24-A	GPP5010SC-24-A	GPP5010SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.09	1.31	1.31	1.09	1.31	1.31


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5010N-AL-A	GPP5010NC-AL-A	GPP5010NO-AL-A
Permissible weight per jaw max [kg]	1.1	1.1	1.1
Length of the gripper fingers max. [mm]	140	135	135
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.85	1.09	1.09

### ▶ Maximum gripper finger length

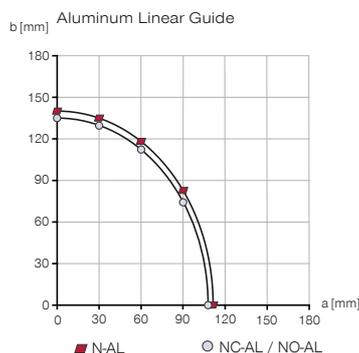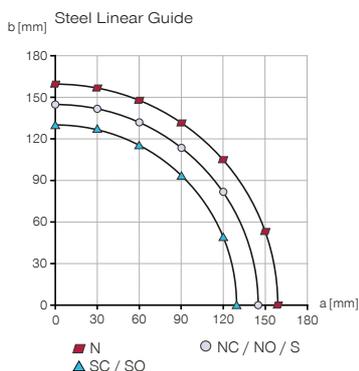

### ▶ Resulting gripper finger length for determining the gripping force

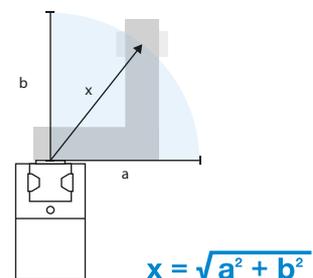


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5010


### TECHNICAL DRAWINGS

NC / NO / SC / SO

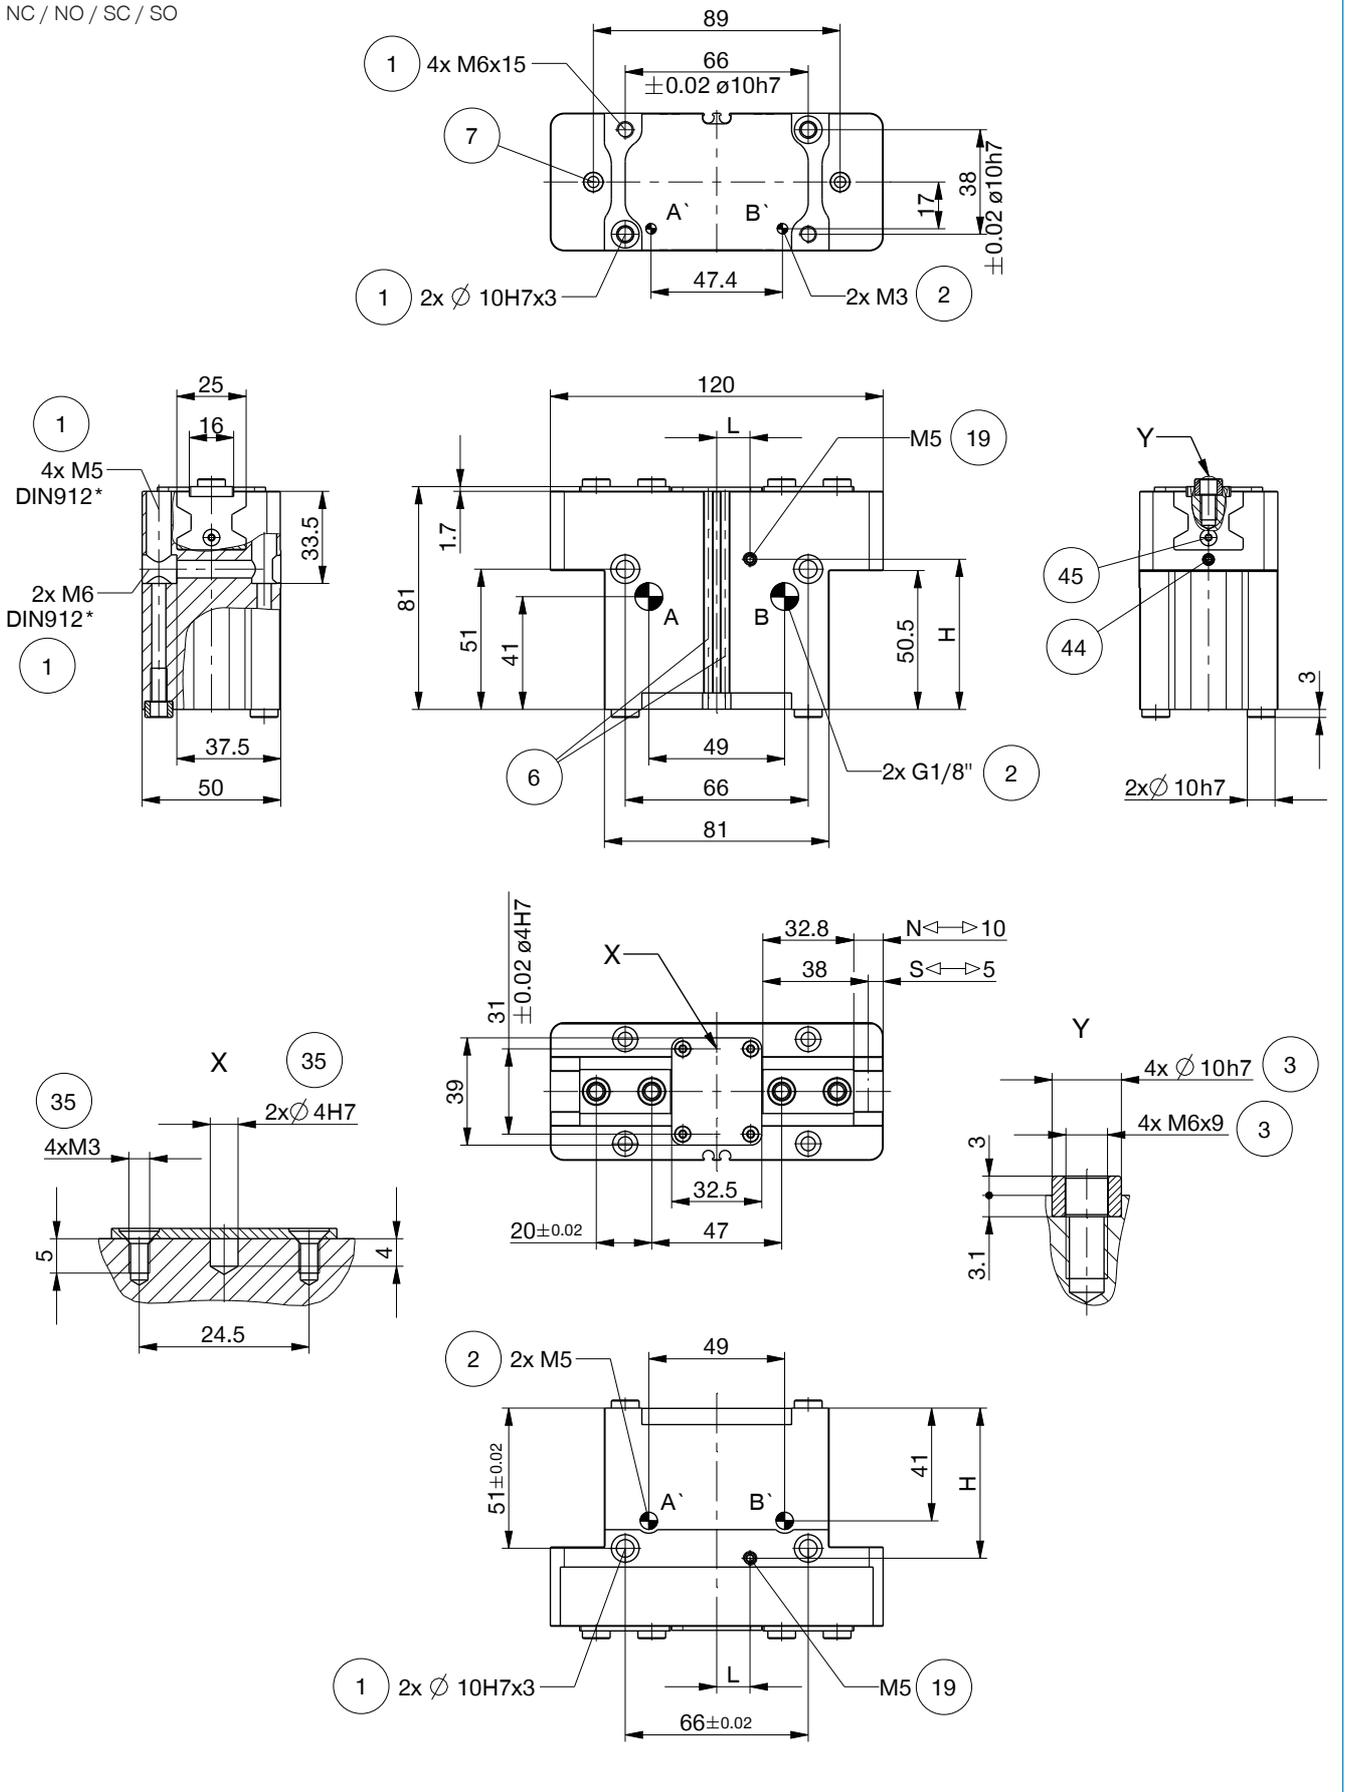


► TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

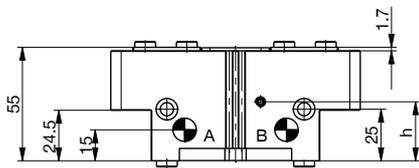


N / NC / NO / S / SC / SO  
-21-A / -24-A

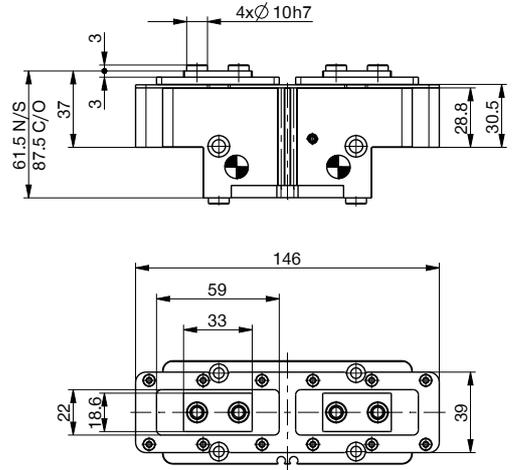

Hoseless air feed-through M3

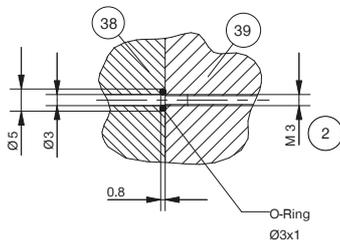

Hoseless air feed-through M5

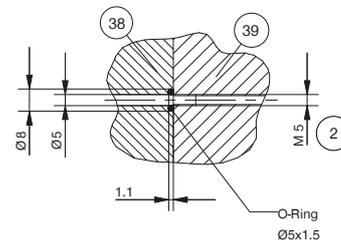

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑦ Mounting block (not for variant AL-A)
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉓ Adapter
- ㉔ Gripper
- ㉕ Clamping sensor (not for variant AL-A)
- ㉖ Switch cam adjustment (not for variant AL-A)
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

► Position ⑱ sealing air connection option

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	54.6	68.8
L [mm]	12	10
h [mm]	28.6	42.8




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5010

### ▶ ACCESSORIES

1

Installation size GPP5010 / 2-Jaw Parallel Grippers / pneumatic / Grippers

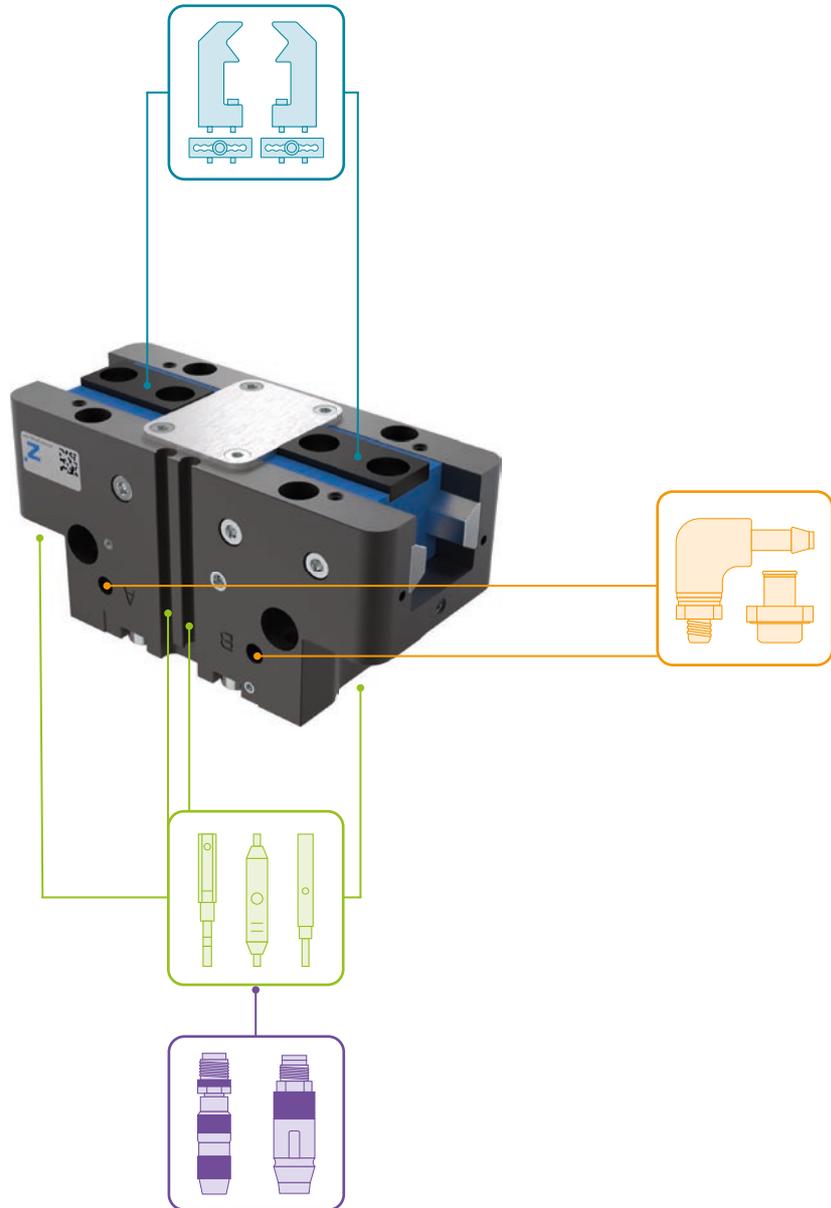

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8




**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

\* Not for variant AL-A



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5013

### ▶ PRODUCT SPECIFICATIONS

1


Installation size GPP5013 / 2-Jaw Parallel Grippers / pneumatic / Grippers

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

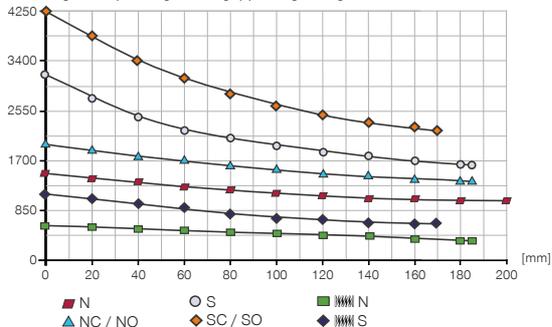

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	110
Mx [Nm]	150
My [Nm]	130
Fa [N]	3300

-AL-A

Steel / aluminum guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

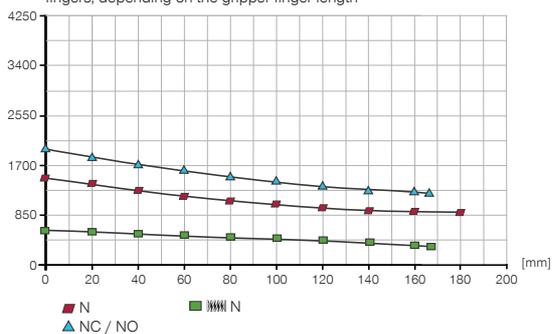

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	100
Mx [Nm]	145
My [Nm]	120
Fa [N]	3200

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5013N-00-A	GPP5013NC-00-A	GPP5013NO-00-A	GPP5013S-00-A	GPP5013SC-00-A	GPP5013SO-00-A
Stroke per jaw [mm]	13	13	13	6	6	6
Gripping force in closing [N]	1410	1920		3100	4220	
Gripping force in opening [N]	1490		1860	3280		4400
Gripping force secured by spring min. [N]		510	510		1120	1120
Closing time [s]	0.09	0.07	0.11	0.09	0.07	0.11
Opening time [s]	0.09	0.11	0.08	0.09	0.11	0.08
Permissible weight per jaw max [kg]	2.4	2.4	2.4	2.4	2.4	2.4
Length of the gripper fingers max. [mm]	200	185	185	185	170	170
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	88	171	171	88	171	171
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	1.5	1.9	1.9	1.5	1.9	1.9

Order no.	▶ Technical Data - High Temperature Version					
	GPP5013N-20-A	GPP5013NC-20-A	GPP5013NO-20-A	GPP5013S-20-A	GPP5013SC-20-A	GPP5013SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130



Order no.	▶ Technical Data - Protector Version					
	GPP5013N-21-A	GPP5013NC-21-A	GPP5013NO-21-A	GPP5013S-21-A	GPP5013SC-21-A	GPP5013SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.86	2.26	2.26	1.86	2.26	2.26

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5013N-24-A	GPP5013NC-24-A	GPP5013NO-24-A	GPP5013S-24-A	GPP5013SC-24-A	GPP5013SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.86	2.26	2.26	1.86	2.26	2.26


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5013N-AL-A	GPP5013NC-AL-A	GPP5013NO-AL-A
Permissible weight per jaw max [kg]	2.1	2.1	2.1
Length of the gripper fingers max. ** [mm]	180	170	170
IP class	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	1.5	1.9	1.9

### ▶ Maximum gripper finger length

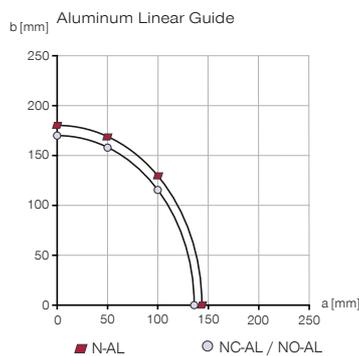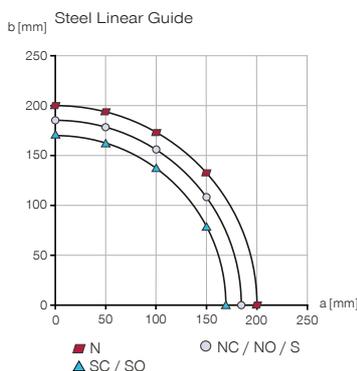

### ▶ Resulting gripper finger length for determining the gripping force

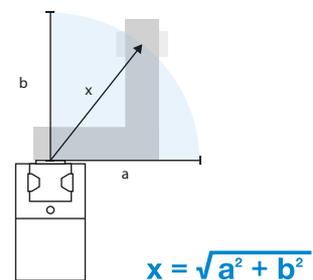


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5013


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

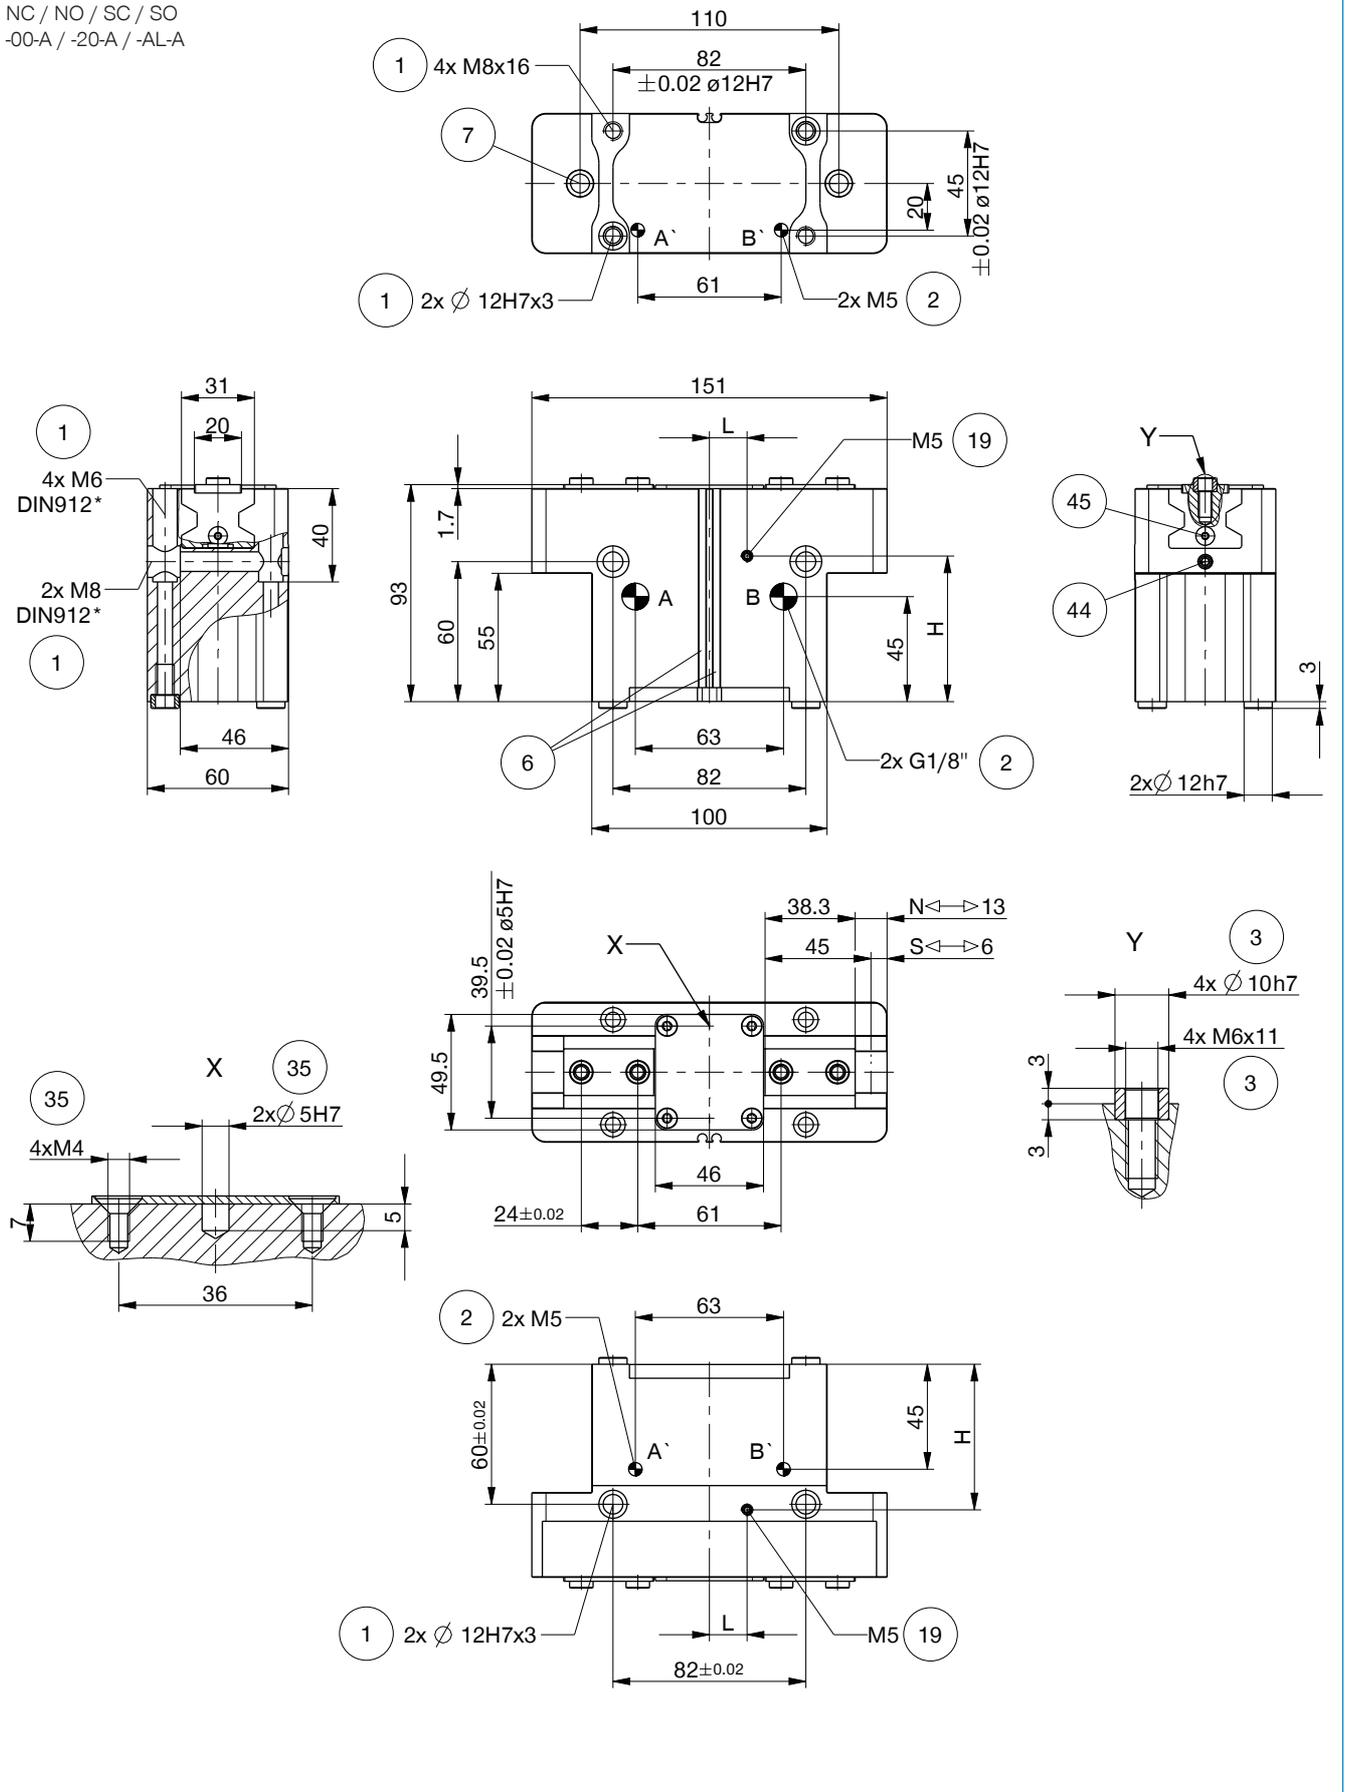


► TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

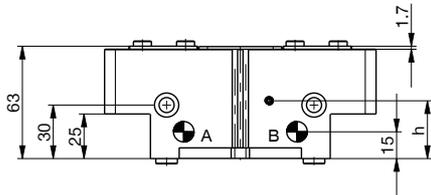

N / NC / NO / S / SC / SO  
-21-A / -24-A

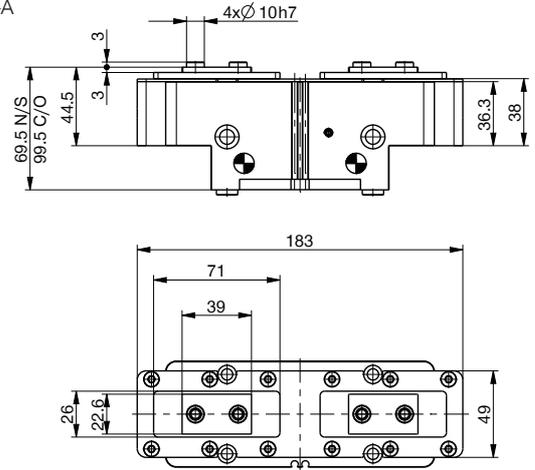

Hoseless air feed-through M5

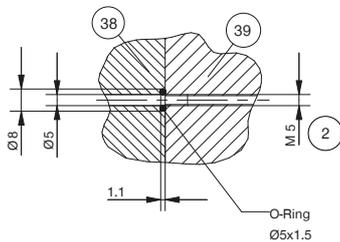

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑦ Mounting block (not for variant AL-A)
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉓ Adapter
- ㉔ Gripper
- ㉕ Clamping sensor (not for variant AL-A)
- ㉖ Switch cam adjustment (not for variant AL-A)
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

► Position ⑱ sealing air connection option

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	62.4	78.6
L [mm]	16	10
h [mm]	32.4	48.6




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5013

### ▶ ACCESSORIES

1

Installation size GPP5013 / 2-Jaw Parallel Grippers / pneumatic / Grippers

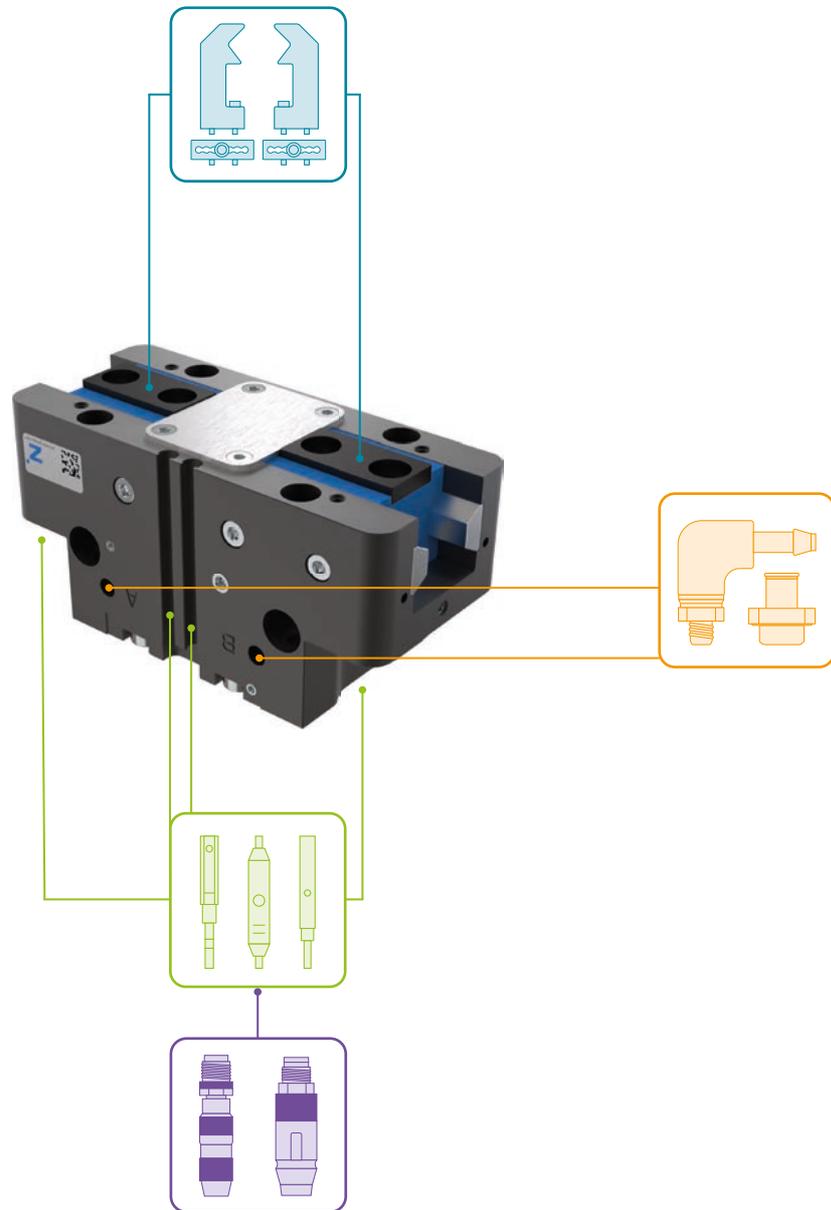

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

018187



2 [piece]  
Centering Disc

019280

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5013AL**  
Universal jaw aluminium



**UB5013ST**  
Universal jaw steel



**EB5013AL**  
Aluminum adjustment jaw



**EB5013ST**  
Steel adjustment jaw



**WB5013L**  
Changeable jaw, loose-part-set



**WB5013F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**WW1-8X8**  
Angled Fittings - Quick Connect Style



**DEV06**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8

\* Not for variant AL-A



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5016

### ▶ PRODUCT SPECIFICATIONS

1


Installation size GPP5016 / 2-Jaw Parallel Grippers / pneumatic / Grippers

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

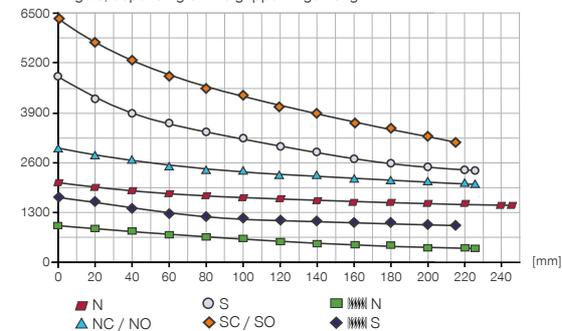

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	145
Mx [Nm]	195
My [Nm]	185
Fa [N]	5200

-AL-A

Steel / aluminum guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

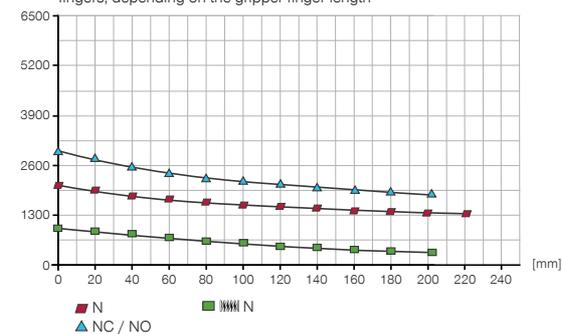

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	140
Mx [Nm]	185
My [Nm]	180
Fa [N]	5000

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5016N-00-A	GPP5016NC-00-A	GPP5016NO-00-A	GPP5016S-00-A	GPP5016SC-00-A	GPP5016SO-00-A
Stroke per jaw [mm]	16	16	16	8	8	8
Gripping force in closing [N]	2090	2860		4610	6310	
Gripping force in opening [N]	2220		2990	4900		6600
Gripping force secured by spring min. [N]		770	770		1700	1700
Closing time [s]	0.13	0.11	0.24	0.13	0.11	0.24
Opening time [s]	0.13	0.24	0.11	0.13	0.24	0.11
Permissible weight per jaw max [kg]	3.8	3.8	3.8	3.8	3.8	3.8
Length of the gripper fingers max. [mm]	245	225	225	225	215	215
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	166	332	332	166	332	332
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	2.9	3.7	3.7	2.9	3.7	3.7

Order no.	▶ Technical Data - High Temperature Version					
	GPP5016N-20-A	GPP5016NC-20-A	GPP5016NO-20-A	GPP5016S-20-A	GPP5016SC-20-A	GPP5016SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130



Order no.	▶ Technical Data - Protector Version					
	GPP5016N-21-A	GPP5016NC-21-A	GPP5016NO-21-A	GPP5016S-21-A	GPP5016SC-21-A	GPP5016SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	3.6	4.4	4.4	3.6	4.4	4.4

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5016N-24-A	GPP5016NC-24-A	GPP5016NO-24-A	GPP5016S-24-A	GPP5016SC-24-A	GPP5016SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	3.6	4.4	4.4	3.6	4.4	4.4


\*with purged air (max. 0,5 bar)

Order no.	▶ Technical data		
	GPP5016N-AL-A	GPP5016NC-AL-A	GPP5016NO-AL-A
Permissible weight per jaw max [kg]	3.5	3.5	3.5
Length of the gripper fingers max. ** [mm]	215	210	210
IP class	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	2.9	3.6	3.6

### ▶ Maximum gripper finger length

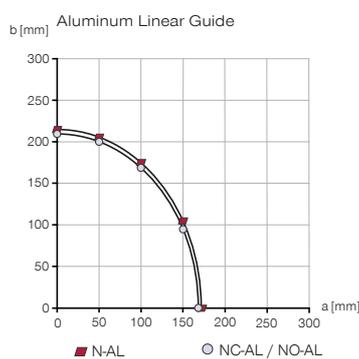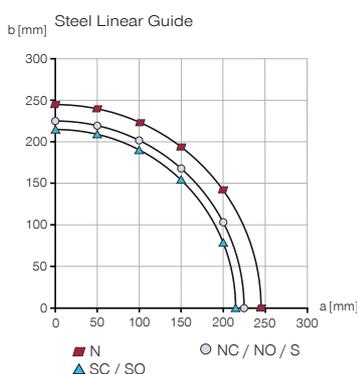

### ▶ Resulting gripper finger length for determining the gripping force

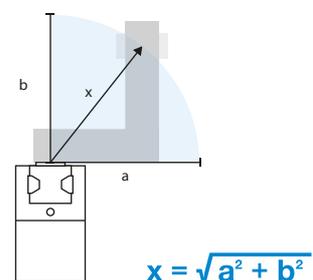


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5016


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

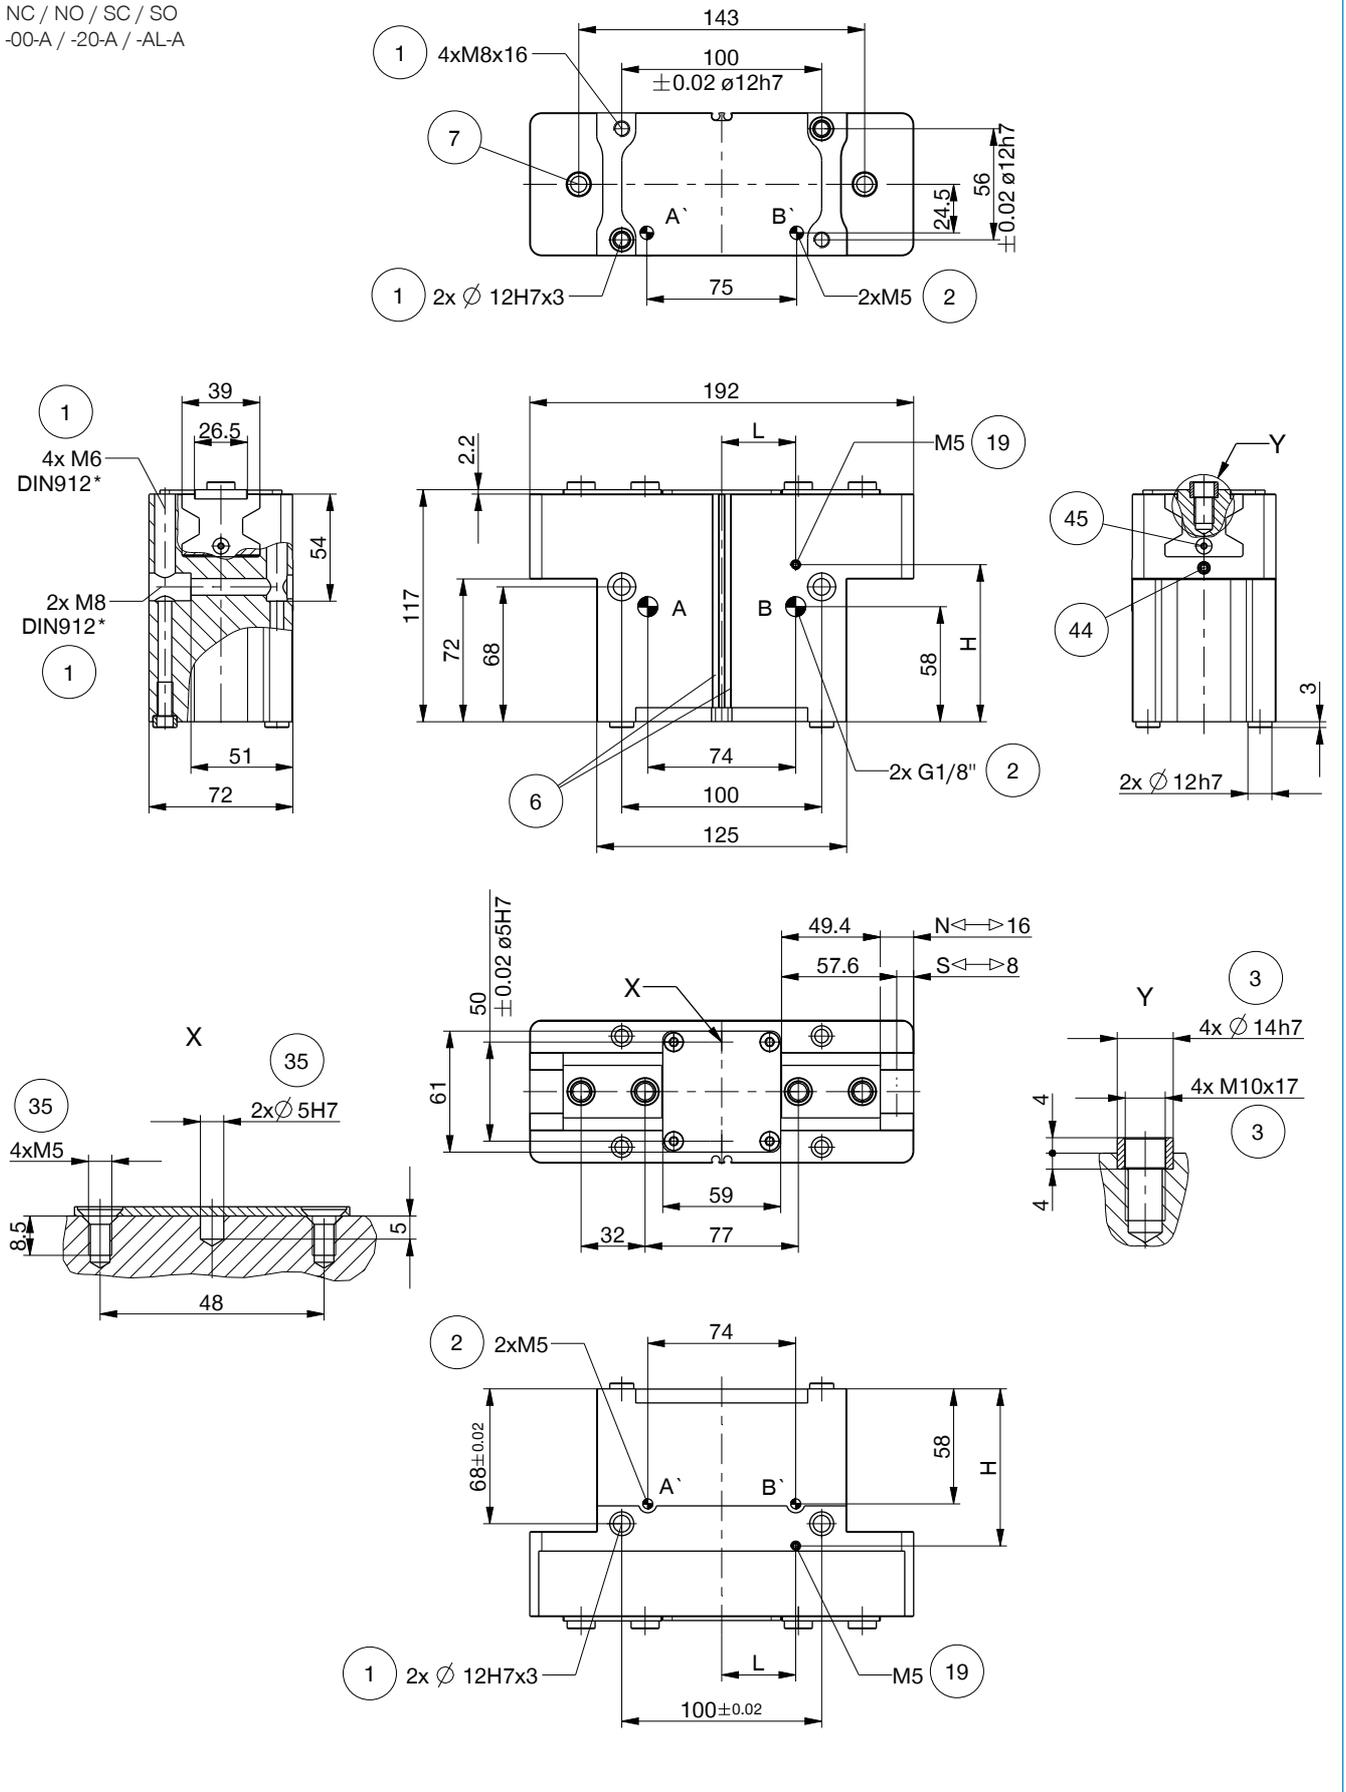


► TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

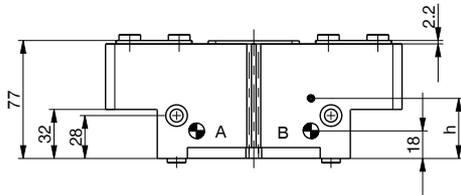

N / NC / NO / S / SC / SO  
-21-A / -24-A

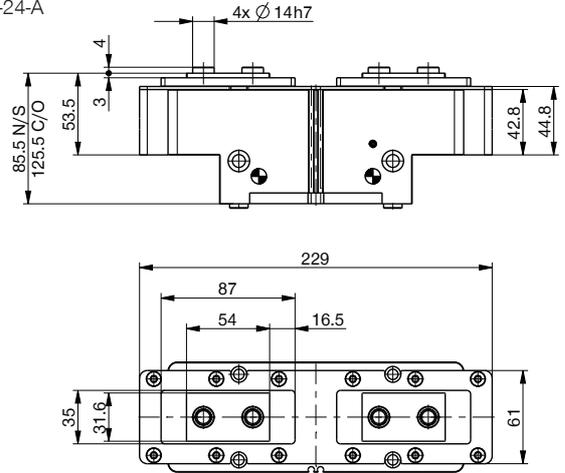

Hoseless air feed-through M5

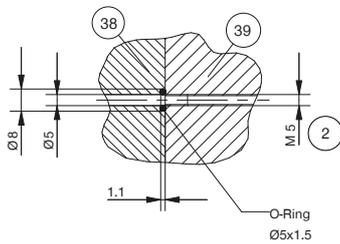

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑦ Mounting block (not for variant AL-A)
- ⑰ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉔ Adapter
- ㉙ Gripper
- ㉛ Clamping sensor (not for variant AL-A)
- ㉜ Switch cam adjustment (not for variant AL-A)
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)

► Position ⑰ sealing air connection option

Order no.	-00-A / -20-A / -21-A / -24-A	-AL-A
H [mm]	79.2	99.1
L [mm]	37	10
h [mm]	39.2	59.1




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5016

### ▶ ACCESSORIES

1

Installation size GPP5016 / 2-Jaw Parallel Grippers / pneumatic / Grippers

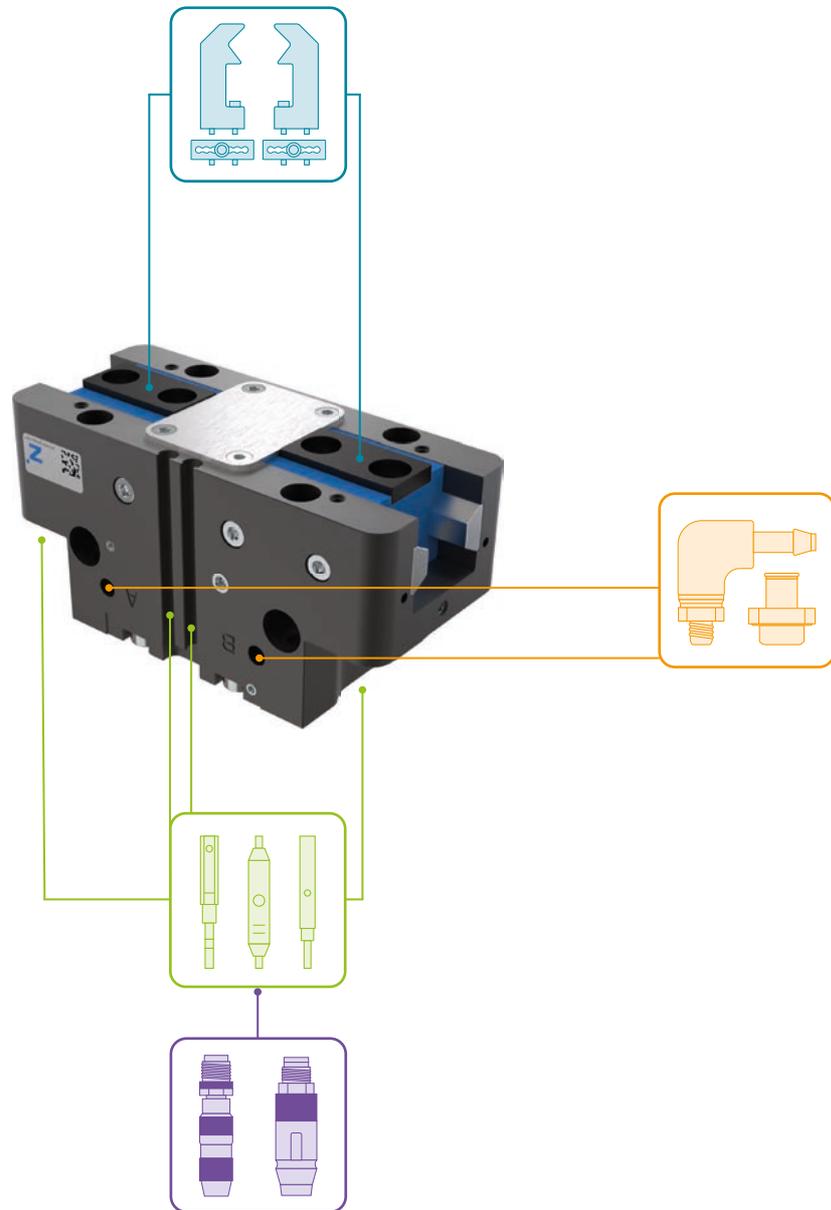

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

019387



2 [piece]  
Centering Disc

019280

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5016AL**  
Universal jaw aluminium



**UB5016ST**  
Universal jaw steel



**EB5016AL**  
Aluminum adjustment jaw



**EB5016ST**  
Steel adjustment jaw



**WB5016L**  
Changeable jaw, loose-part-set



**WB5016F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DEV08**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8

\* Not for variant AL-A



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5025


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

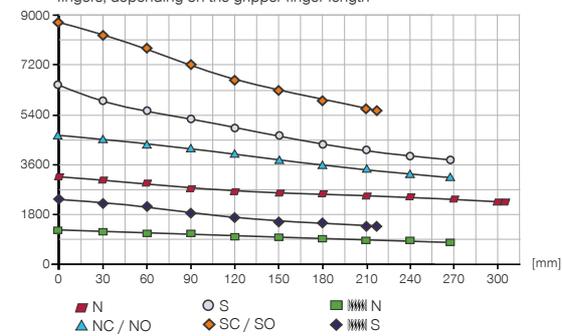

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

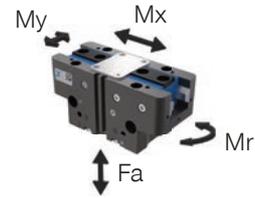

Mr [Nm]	180
Mx [Nm]	205
My [Nm]	225
Fa [N]	7500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5025N-00-A	GPP5025NC-00-A	GPP5025NO-00-A	GPP5025S-00-A	GPP5025SC-00-A	GPP5025SO-00-A
Stroke per jaw [mm]	25	25	25	14	14	14
Gripping force in closing [N]	3280	4510		6360	8730	
Gripping force in opening [N]	3490		4710	6760		9130
Gripping force secured by spring min. [N]		1220	1220		2370	2370
Closing time [s]	0.33	0.28	0.57	0.33	0.28	0.57
Opening time [s]	0.33	0.57	0.28	0.33	0.57	0.28
Permissible weight per jaw max [kg]	7	7	7	7	7	7
Length of the gripper fingers max. [mm]	310	265	265	265	220	220
Repetition accuracy +/- [mm]	0.02	0.02	0.02	0.02	0.02	0.02
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	420	830	830	420	830	830
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	6.1	7.65	7.65	6.1	7.65	7.65

Order no.	▶ Technical Data - High Temperature Version					
	GPP5025N-20-A	GPP5025NC-20-A	GPP5025NO-20-A	GPP5025S-20-A	GPP5025SC-20-A	GPP5025SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPP5025N-21-A	GPP5025NC-21-A	GPP5025NO-21-A	GPP5025S-21-A	GPP5025SC-21-A	GPP5025SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	7.20	8.75	8.75	7.2	8.75	8.75


Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5025N-24-A	GPP5025NC-24-A	GPP5025NO-24-A	GPP5025S-24-A	GPP5025SC-24-A	GPP5025SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	7.20	8.75	8.75	7.2	8.75	8.75

\*with purged air (max. 0,5 bar)

### ▶ Maximum gripper finger length



### ▶ Resulting gripper finger length for determining the gripping force

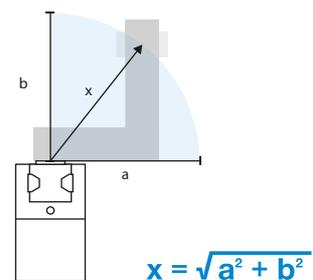


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5025


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

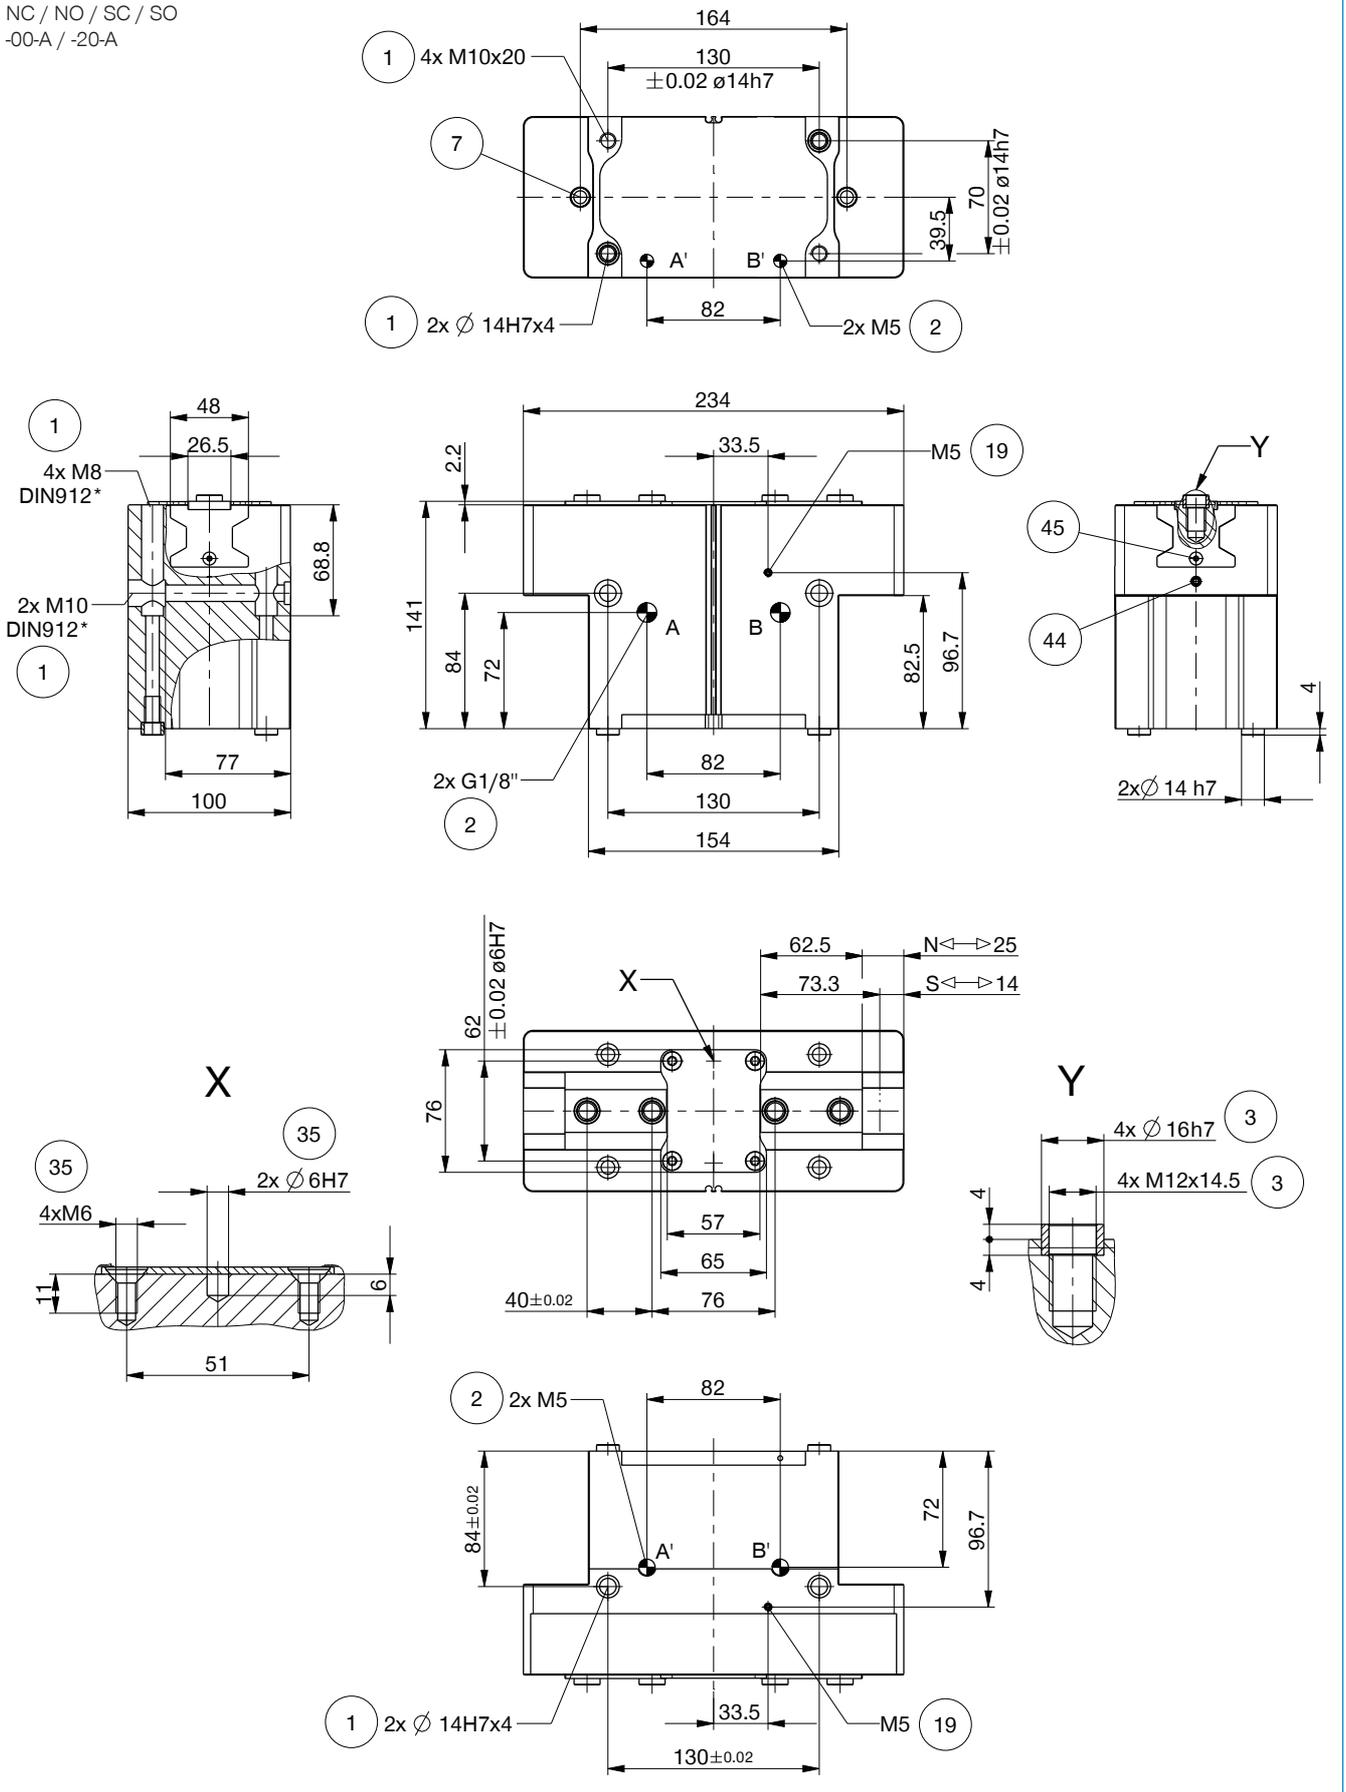


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

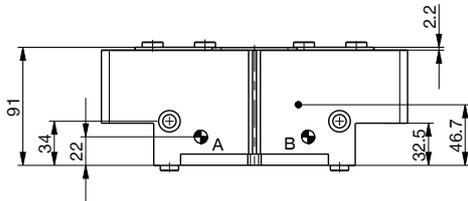

N / NC / NO / S / SC / SO  
-21-A / -24-A

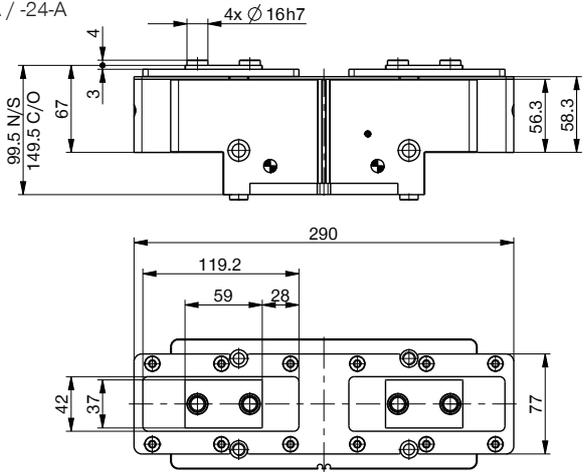

Hoseless air feed-through M5

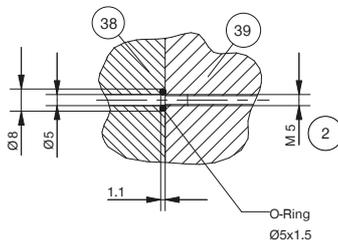

- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑦ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ㉓ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ㉔ Adapter  |  |


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5025

### ▶ ACCESSORIES

1

Installation size GPP5025 / 2-Jaw Parallel Grippers / pneumatic / Grippers

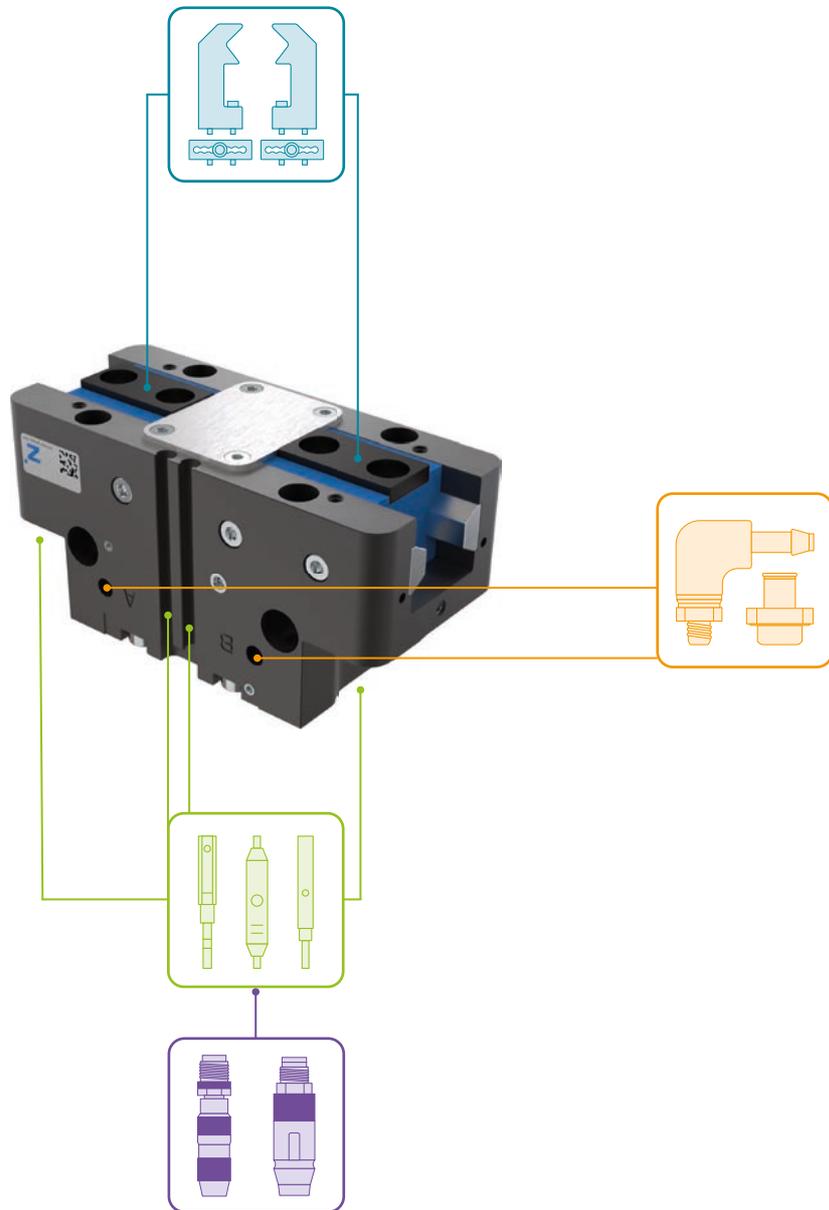


### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

030529



2 [piece]  
Centering Disc

019387

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5025AL**  
Universal jaw aluminium



**UB5025ST**  
Universal jaw steel



**EB5025AL**  
Aluminum adjustment jaw



**EB5025ST**  
Steel adjustment jaw



**WB5025L**  
Changeable jaw, loose-part-set



**WB5025F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DEV08**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS


## INSTALLATION SIZE GPP5030

### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

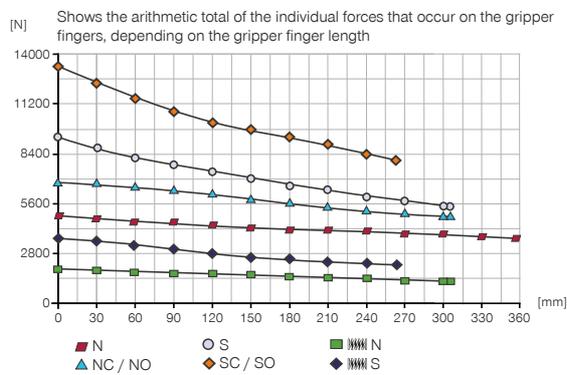

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

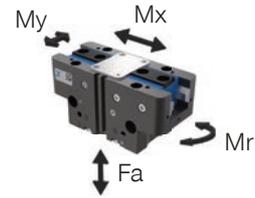

Mr [Nm]	210
Mx [Nm]	290
My [Nm]	310
Fa [N]	9500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5030N-00-A	GPP5030NC-00-A	GPP5030NO-00-A	GPP5030S-00-A	GPP5030SC-00-A	GPP5030SO-00-A
Stroke per jaw [mm]	30	30	30	17	17	17
Gripping force in closing [N]	5000	6850		9600	13160	
Gripping force in opening [N]	5210		7060	9990		13550
Gripping force secured by spring min. [N]		1850	1850		3560	3560
Closing time [s]	0.4	0.35	0.65	0.4	0.35	0.65
Opening time [s]	0.4	0.65	0.35	0.4	0.65	0.35
Permissible weight per jaw max [kg]	9.5	9.5	9.5	9.5	9.5	9.5
Length of the gripper fingers max. [mm]	355	305	305	305	260	260
Repetition accuracy +/- [mm]	0.04	0.04	0.04	0.04	0.04	0.04
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	745	1430	1430	745	1430	1430
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	9.2	12	12	9.2	12	12


Order no.	▶ Technical Data - High Temperature Version					
	GPP5030N-20-A	GPP5030NC-20-A	GPP5030NO-20-A	GPP5030S-20-A	GPP5030SC-20-A	GPP5030SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPP5030N-21-A	GPP5030NC-21-A	GPP5030NO-21-A	GPP5030S-21-A	GPP5030SC-21-A	GPP5030SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	10.9	13.7	13.7	10.9	13.7	13.7


Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5030N-24-A	GPP5030NC-24-A	GPP5030NO-24-A	GPP5030S-24-A	GPP5030SC-24-A	GPP5030SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	10.9	13.7	13.7	10.9	13.7	13.7

\*with purged air (max. 0,5 bar)

### ▶ Maximum gripper finger length

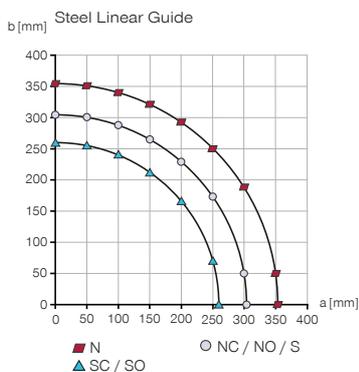

### ▶ Resulting gripper finger length for determining the gripping force

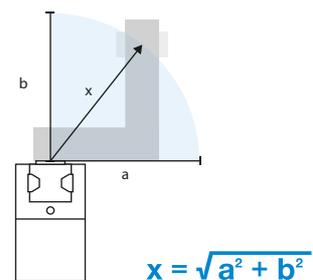


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5030

### TECHNICAL DRAWINGS


NC / NO / SC / SO  
-00-A / -20-A

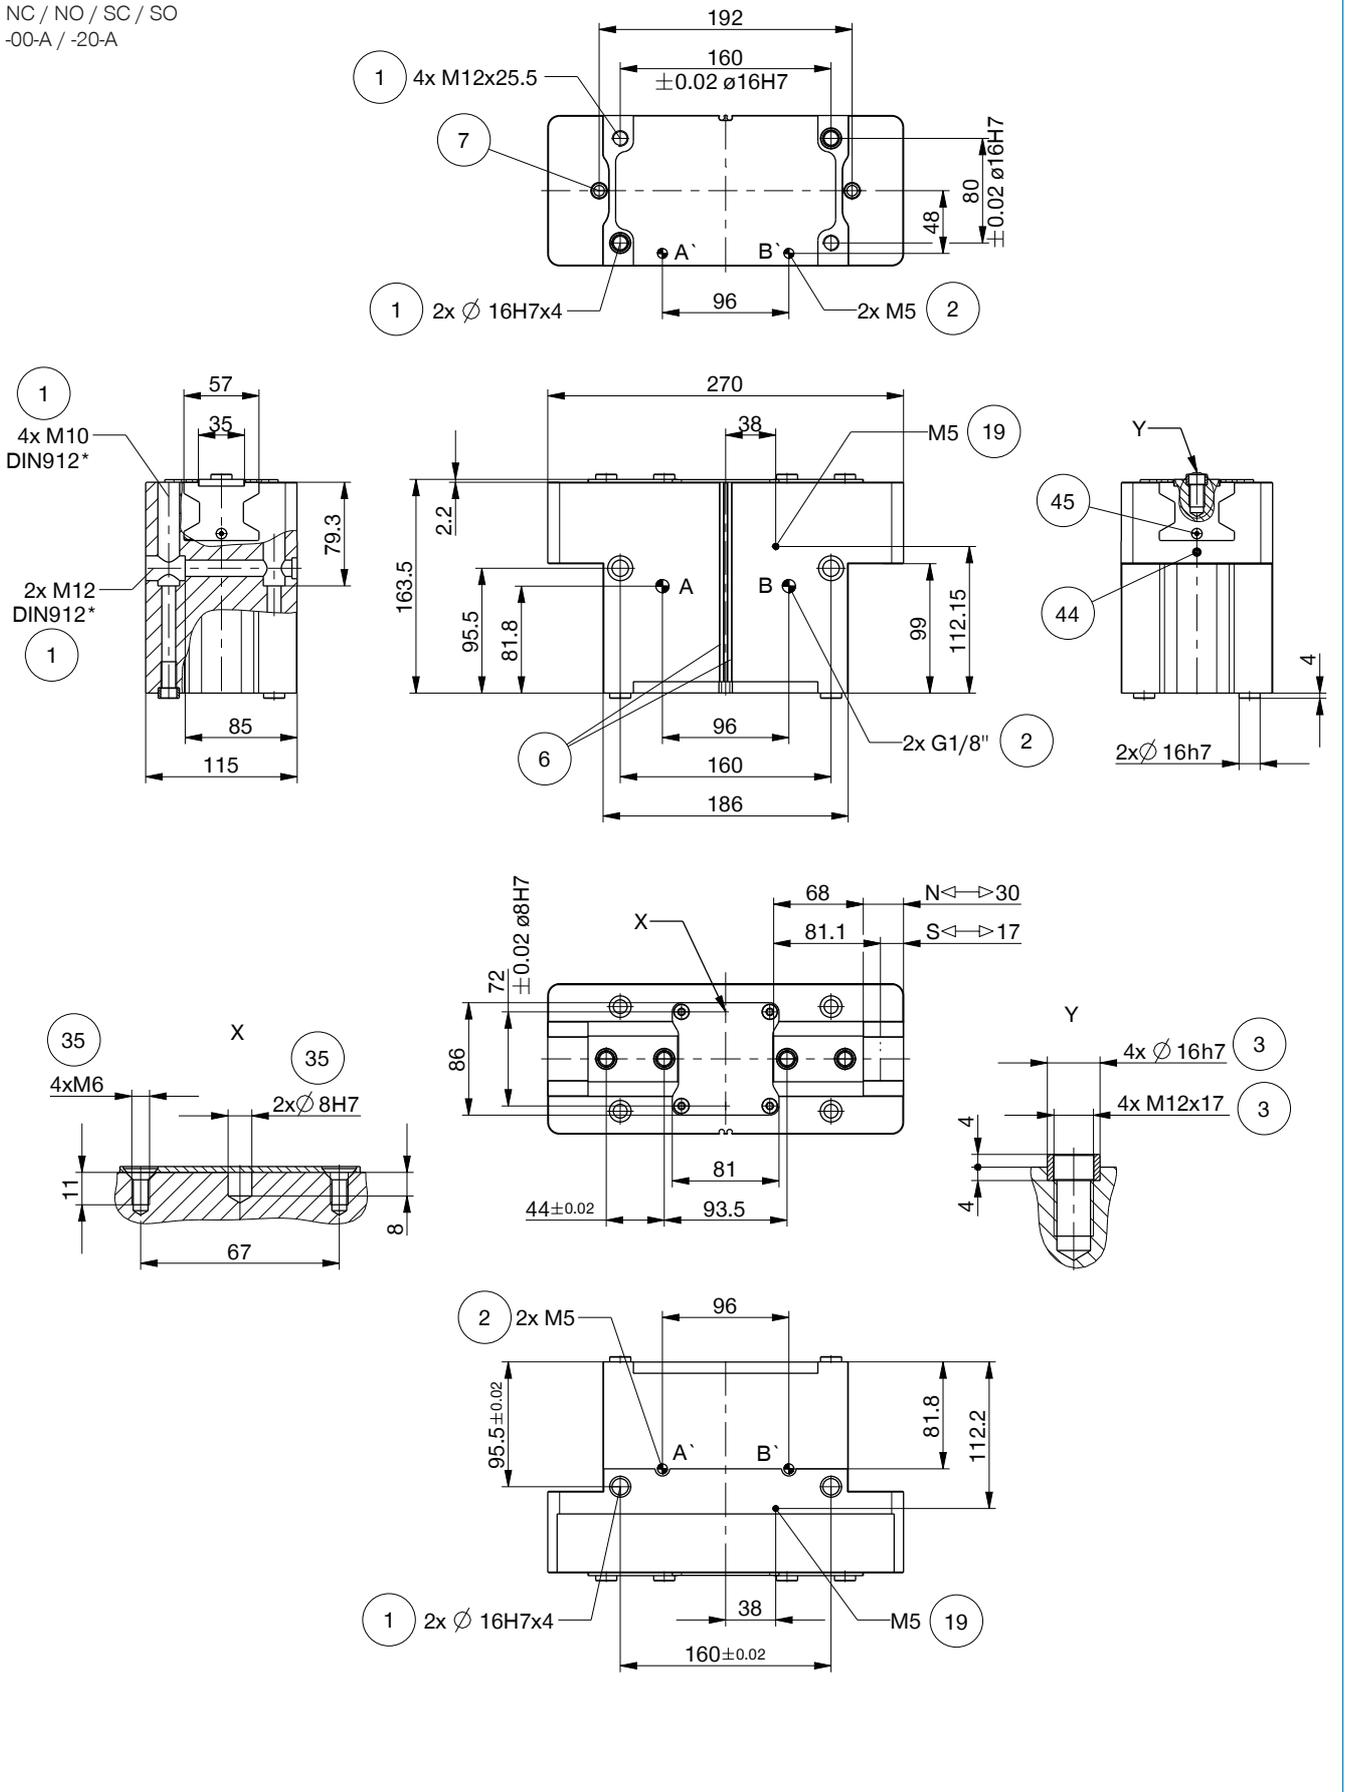


1 Installation size GPP5030 / 2-Jaw Parallel Grippers / pneumatic / Grippers

## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

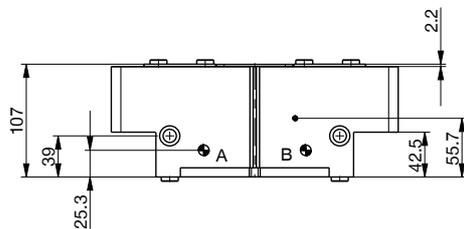

N / NC / NO / S / SC / SO  
-21-A / -24-A

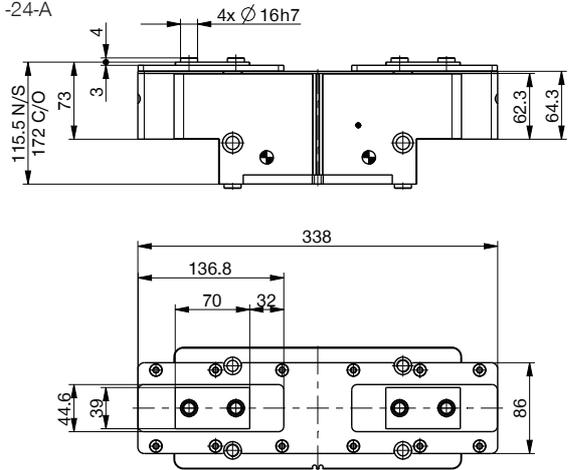

Hoseless air feed-through M5

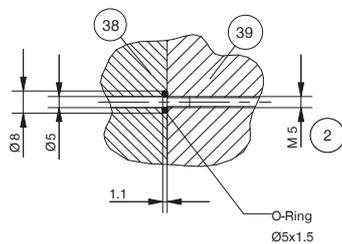

- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉓ Adapter  |                                       |


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5030

### ▶ ACCESORIES

1

Installation size GPP5030 / 2-Jaw Parallel Grippers / pneumatic / Grippers

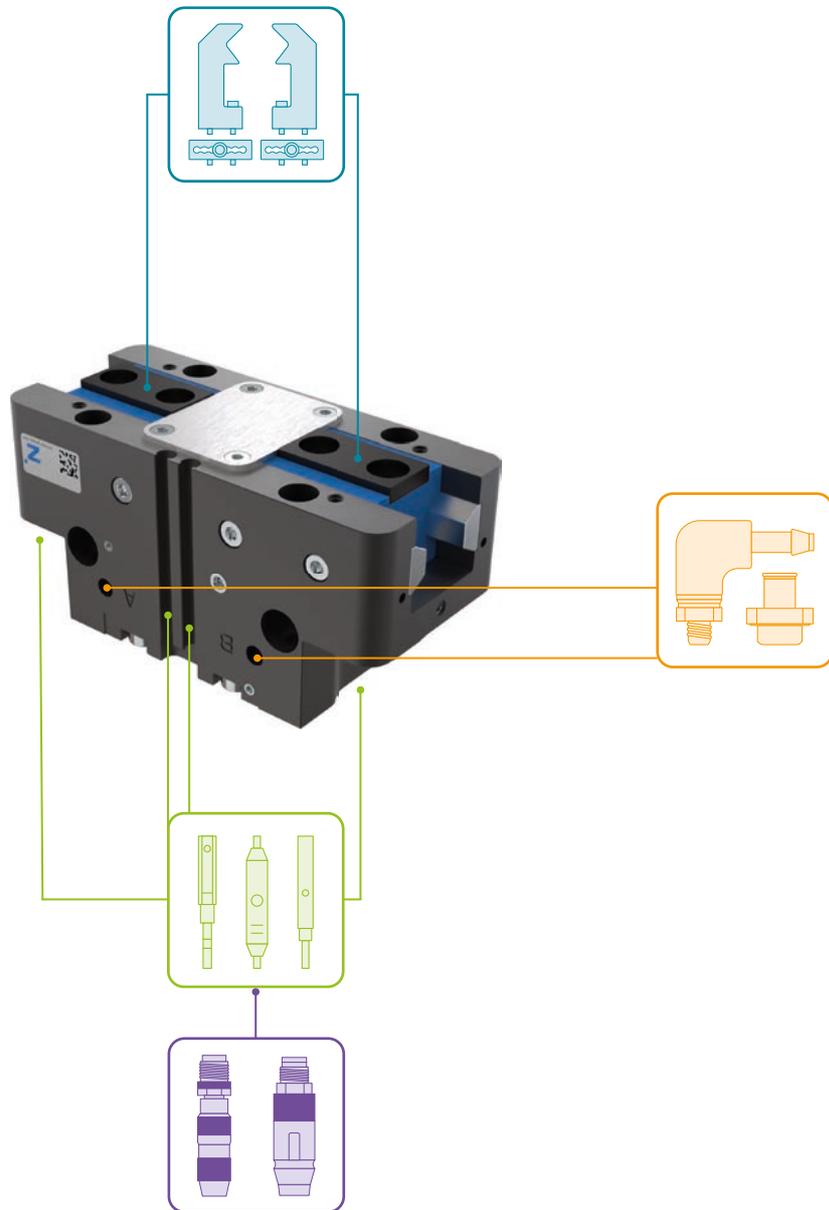

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

030529

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5030AL**  
Universal jaw aluminium



**UB5030ST**  
Universal jaw steel



**EB5030AL**  
Aluminum adjustment jaw



**EB5030ST**  
Steel adjustment jaw



**WB5030L**  
Changeable jaw, loose-part-set



**WB5030F**  
Changeable jaw, fix-part



ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DEV08**  
Quick Exhaust Valve



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS


## INSTALLATION SIZE GPP5035

### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

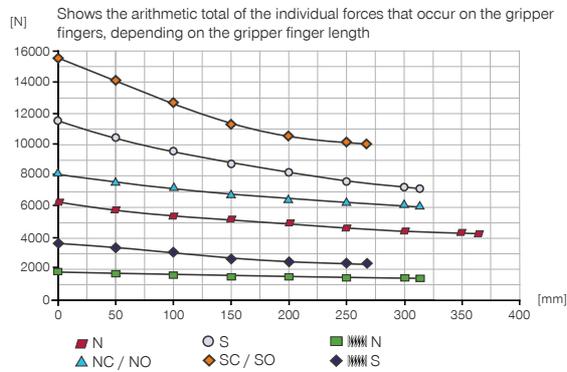

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

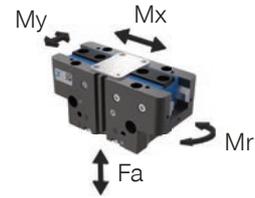

Mr [Nm]	260
Mx [Nm]	430
My [Nm]	450
Fa [N]	10400

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5035N-00-A	GPP5035NC-00-A	GPP5035NO-00-A	GPP5035S-00-A	GPP5035SC-00-A	GPP5035SO-00-A
Stroke per jaw [mm]	35	35	35	20	20	20
Gripping force in closing [N]	6100	8000		11700	15500	
Gripping force in opening [N]	6300		8200	12100		15900
Gripping force secured by spring min. [N]		1900	1900		3700	3700
Closing time [s]	0.5	0.4	0.7	0.5	0.4	0.7
Opening time [s]	0.5	0.7	0.4	0.5	0.7	0.4
Permissible weight per jaw max [kg]	12.5	12.5	12.5	12.5	12.5	12.5
Length of the gripper fingers max. [mm]	365	315	315	315	260	260
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	6.5	6.5	8	6.5	6.5
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	1185	2075	2075	1185	2075	2075
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	15.8	18.6	18.6	16.1	18.9	18.9


Order no.	▶ Technical Data - High Temperature Version					
	GPP5035N-20-A	GPP5035NC-20-A	GPP5035NO-20-A	GPP5035S-20-A	GPP5035SC-20-A	GPP5035SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPP5035N-21-A	GPP5035NC-21-A	GPP5035NO-21-A	GPP5035S-21-A	GPP5035SC-21-A	GPP5035SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	20.2	23	23	20.5	23.3	23.3


Order no.	▶ Technical Data - High Temperature Protector Version					
	GPP5035N-24-A	GPP5035NC-24-A	GPP5035NO-24-A	GPP5035S-24-A	GPP5035SC-24-A	GPP5035SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	20.2	23	23	20.5	23.3	23.3

\*with purged air (max. 0,5 bar)

### ▶ Maximum gripper finger length

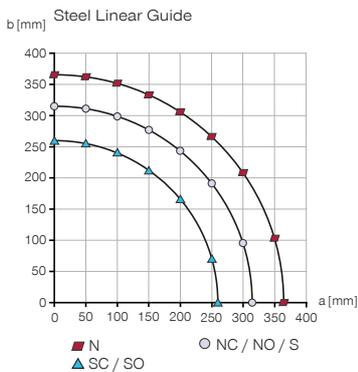

### ▶ Resulting gripper finger length for determining the gripping force

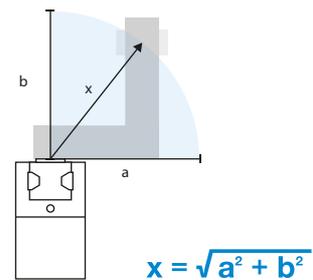


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5035

### TECHNICAL DRAWINGS


NC / NO / SC / SO  
-00-A / -20-A

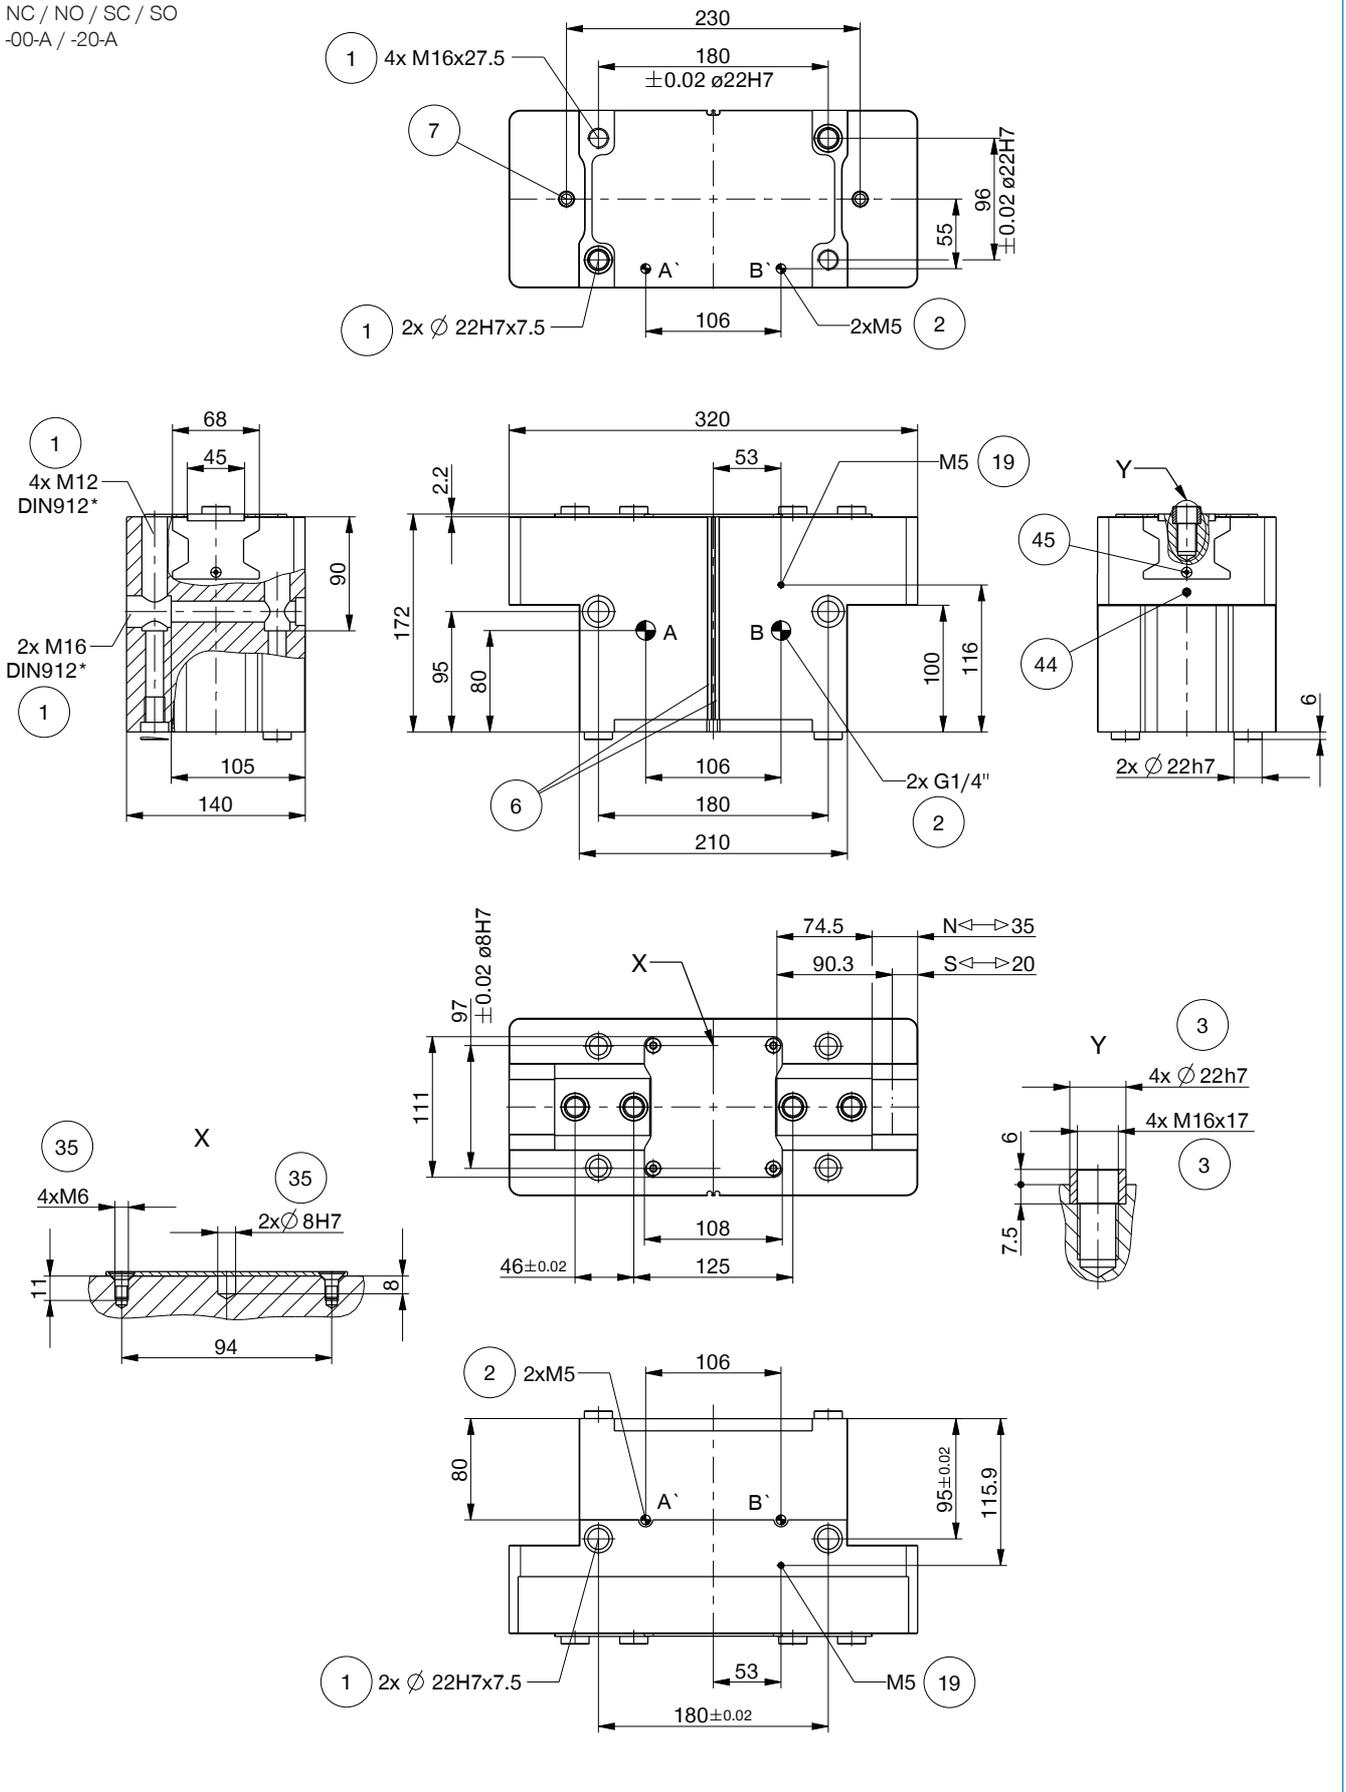


1 Installation size GPP5035 / 2-Jaw Parallel Grippers / pneumatic / Grippers

## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

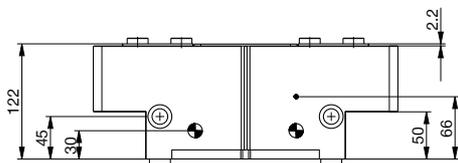

N / NC / NO / S / SC / SO  
-21-A / -24-A

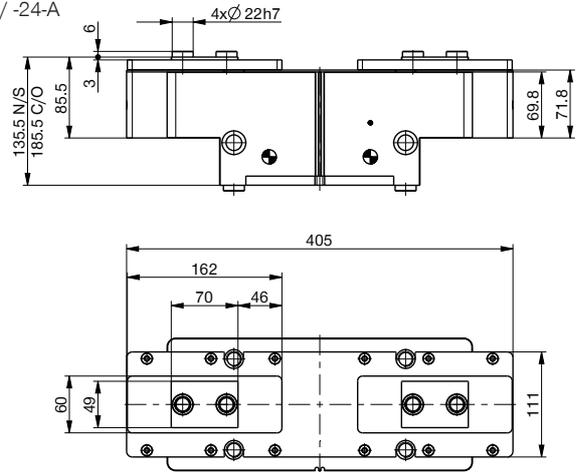

Hoseless air feed-through M5

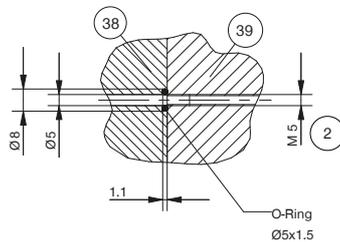

- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉑ Adapter  |                                       |




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5035

### ▶ ACCESORIES

1

Installation size GPP5035 / 2-Jaw Parallel Grippers / pneumatic / Grippers

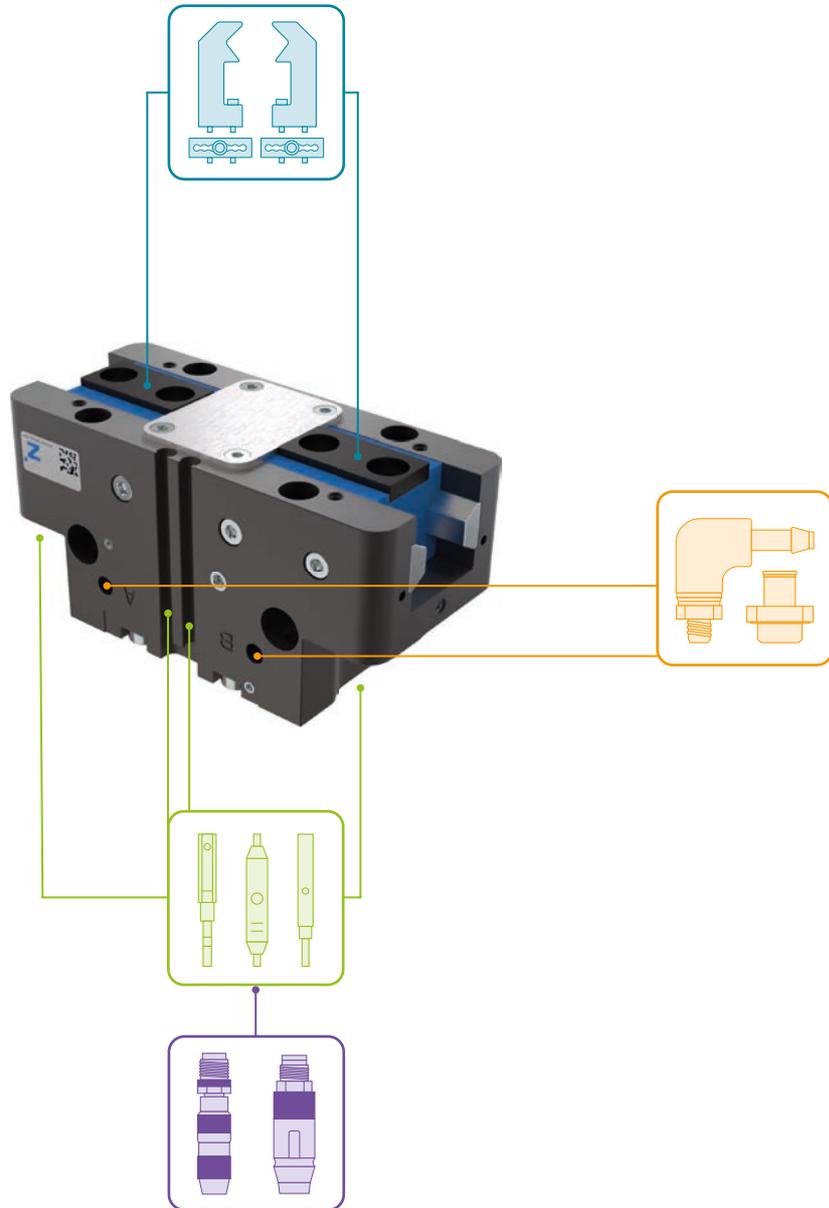

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

035358

▶ **RECOMMENDED ACCESSORIES**



**ENERGY SUPPLY**



**GV1-4X8**  
Straight Fittings - Quick Connect Style



**WV1-4X8**  
Angled Fittings - Quick Connect Style



**DSV1-4**  
Pressure safety valve



**DSV1-4E**  
Pressure safety valve with quick exhaust



**SENSORS**



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**CONNECTIONS / OTHER**



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5045


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

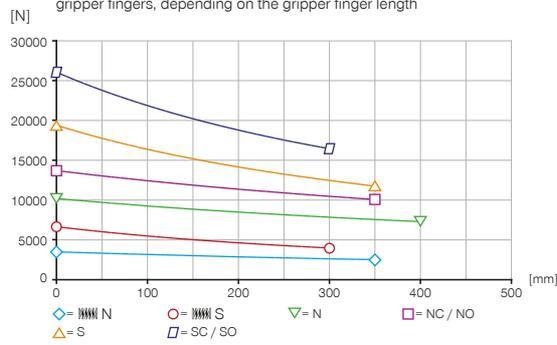

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

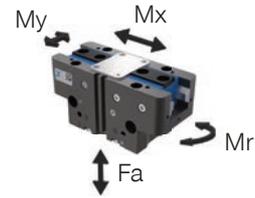

Mr [Nm]	390
Mx [Nm]	580
My [Nm]	600
Fa [N]	11500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## TECHNICAL DATA

Order no.	Technical data					
	GPP5045N-00-A	GPP5045NC-00-A	GPP5045NO-00-A	GPP5045S-00-A	GPP5045SC-00-A	GPP5045SO-00-A
Stroke per jaw [mm]	45	45	45	26	26	26
Gripping force in closing [N]	10200	13700		19400	26050	
Gripping force in opening [N]	10700		14200	20300		26950
Gripping force secured by spring min. [N]		3500	3500		6650	6650
Closing time [s]	0.055	0.55	0.9	0.55	0.55	0.9
Opening time [s]	0.055	0.9	0.55	0.55	0.9	0.55
Permissible weight per jaw max [kg]	17	17	17	17	17	17
Length of the gripper fingers max. [mm]	400	350	350	350	300	300
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	6.5	6.5	8	6.5	6.5
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm³]	2420	4400	4400	2420	4400	4400
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Protected against corrosion	Yes	Yes	Yes	Yes	Yes	Yes
Weight [kg]	33	40.5	40.5	34	41.5	41.5


Order no.	Technical Data - High Temperature Version					
	GPP5045N-20-A	GPP5045NC-20-A	GPP5045NO-20-A	GPP5045S-20-A	GPP5045SC-20-A	GPP5045SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	Technical Data - Protector Version					
	GPP5045N-21-A	GPP5045NC-21-A	GPP5045NO-21-A	GPP5045S-21-A	GPP5045SC-21-A	GPP5045SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	41.5	49	49	42.5	50	50


Order no.	Technical Data - High Temperature Protector Version					
	GPP5045N-24-A	GPP5045NC-24-A	GPP5045NO-24-A	GPP5045S-24-A	GPP5045SC-24-A	GPP5045SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	41.5	49	49	42.5	50	50

\*with purged air (max. 0,5 bar)

### Maximum gripper finger length

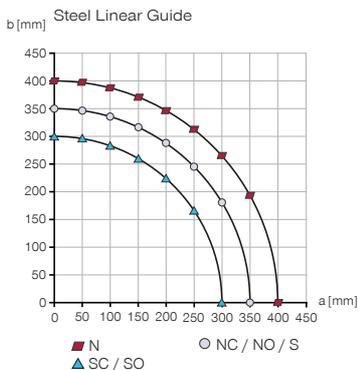

### Resulting gripper finger length for determining the gripping force

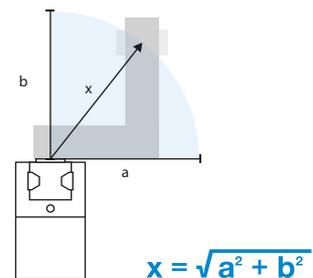


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5045

### TECHNICAL DRAWINGS


NC / NO / SC / SO  
-00-A / -20-A

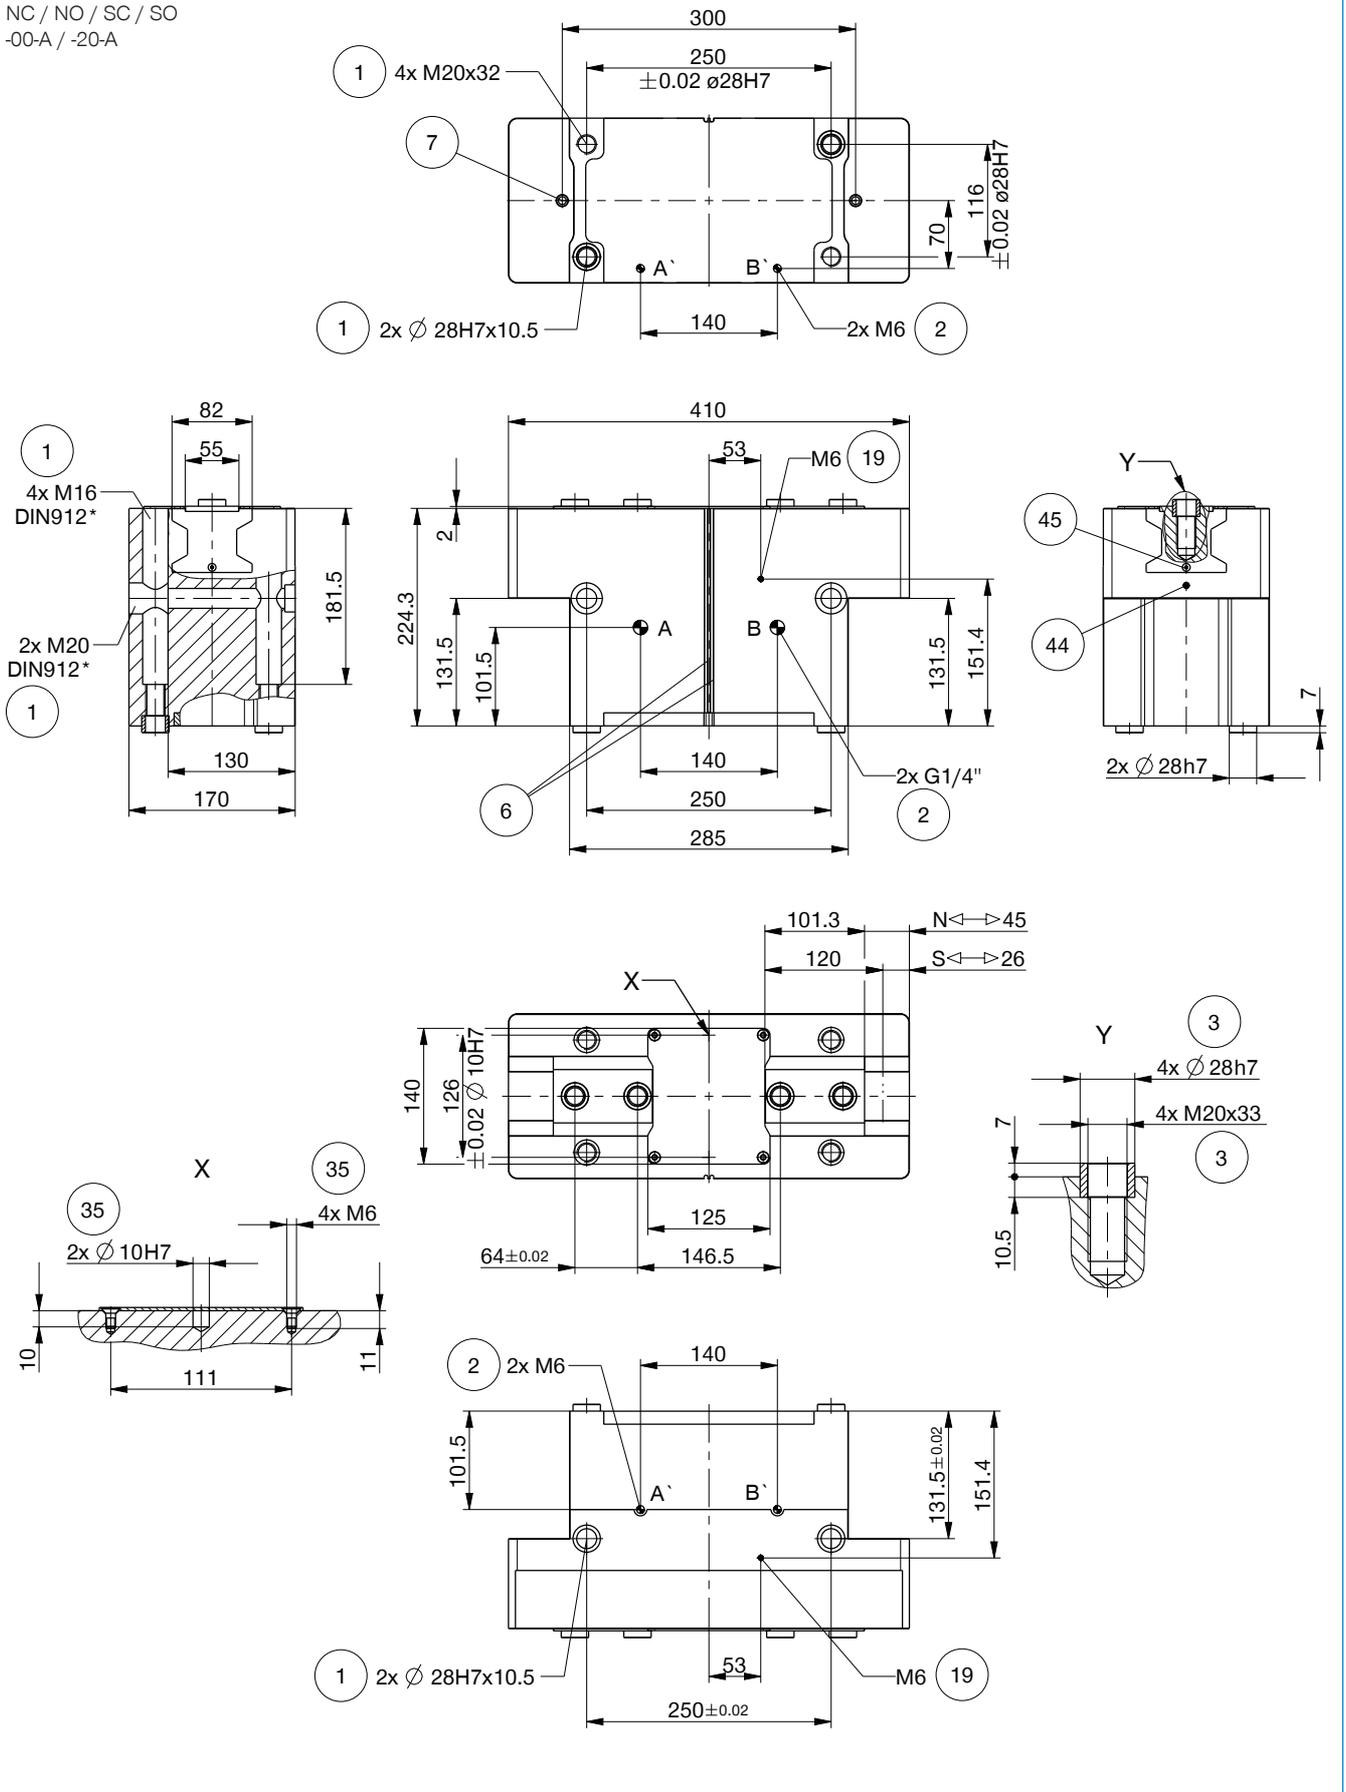


1 Installation size GPP5045 / 2-Jaw Parallel Grippers / pneumatic / Grippers

## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

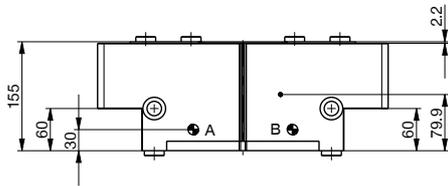

N / NC / NO / S / SC / SO  
-21-A / -24-A

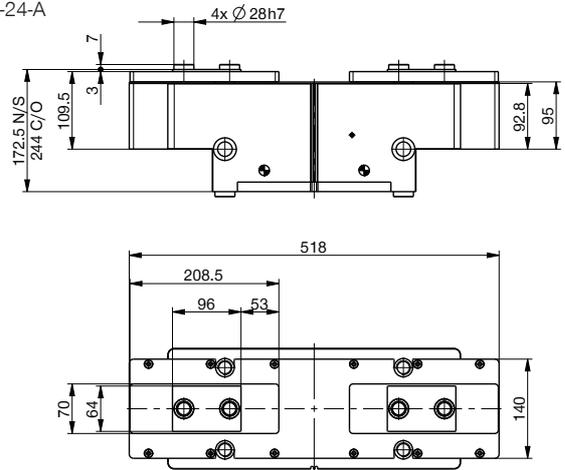

Hoseless air feed-through M6

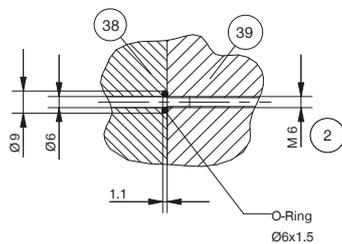

- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉓ Adapter  |                                       |




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5045

### ▶ ACCESSORIES

1

Installation size GPP5045 / 2-Jaw Parallel Grippers / pneumatic / Grippers

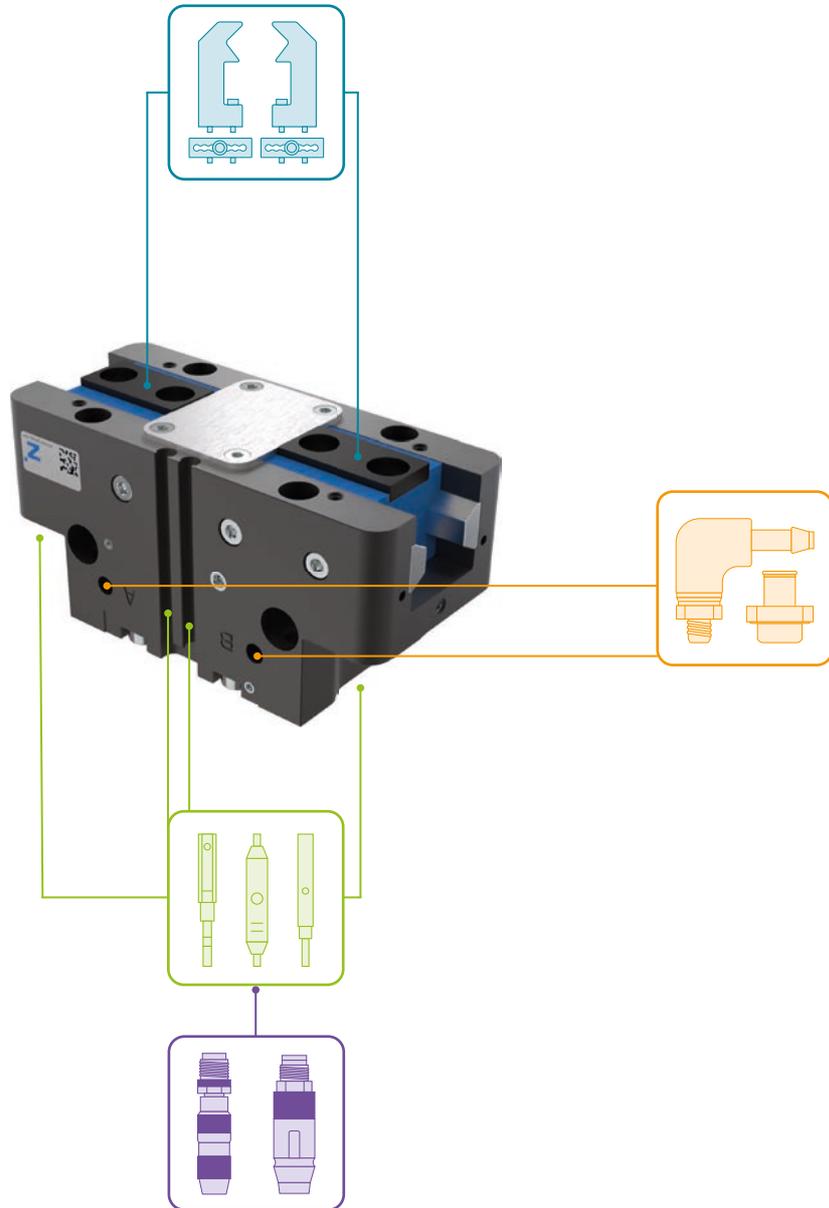

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

036784

▶ **RECOMMENDED ACCESSORIES**



**ENERGY SUPPLY**



**GV1-4X8**  
Straight Fittings - Quick Connect Style



**WV1-4X8**  
Angled Fittings - Quick Connect Style



**DSV1-4**  
Pressure safety valve



**DSV1-4E**  
Pressure safety valve with quick exhaust



**SENSORS**



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**CONNECTIONS / OTHER**



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)




**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 2-JAW PARALLEL GRIPPERS

## SERIES GPP5000IL

### ▶ PRODUCT ADVANTAGES

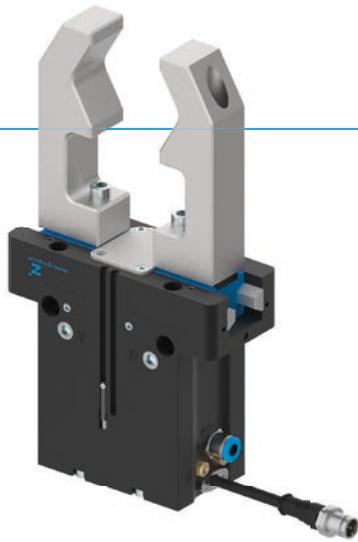

IO-Link

#### “The hybrid”


- ▶ Pneumatic drive combined with IO-Link technology
- ▶ Up to 50% reduction in cycle times and up to 90% less compressed air usage
- ▶ Connection over just one pneumatic line and IO-Link cable
- ▶ Integrated valve technology, sensor technology, status display, pressure monitoring and temperature monitoring
- ▶ Part detection down to +/- 0.05 mm for a tolerance range that can be taught for any value
- ▶ 32 workpieces data sets can be programmed
- ▶ Protected from corrosion and sealed in accordance with IP64
- ▶ Up to 30 million cycles without maintenance

### ▶ SERIES CHARACTERISTICS

Installation size	Version						
	GPP50XXIL	N	NC	NO	S	SC	SO
IO-Link	•	•	•	•	•	•	•
Spring closing C		•				•	
Spring opening O				•			•
High-strength S					•	•	•
30 million maintenance-free cycles (max.)	•	•	•	•	•	•	•
Integrated sensing	•	•	•	•	•	•	•
Integrated valve technology	•	•	•	•	•	•	•
Protected against corrosion	•	•	•	•	•	•	•
Purged air	•	•	•	•	•	•	•
IP64	•	•	•	•	•	•	•



## ► BENEFITS IN DETAIL

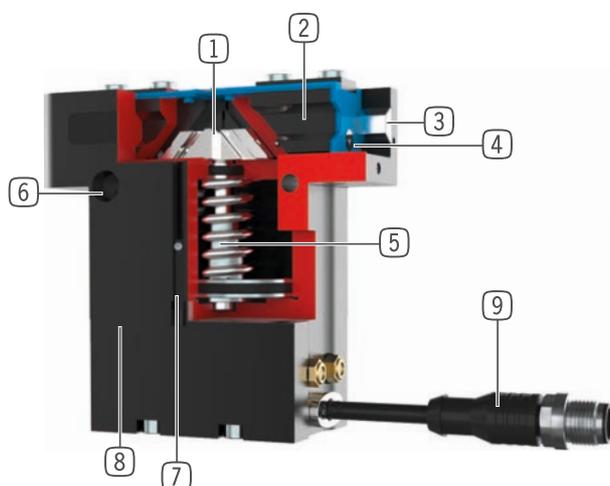

- ① **Wedge hook mechanism**
  - Supports to absorb high forces and moments
  - Synchronized gripper jaw movement
- ② **Gripper jaw**
  - Gripper fingers mounted using removable centering sleeves
  - Lubricated for life via incorporated lubrication slots
- ③ **Steel Linear Guide**
  - Steel in steel guide
  - Enables use of extremely long gripper fingers
- ④ **Dual lip seal**
  - IP64
  - Prevents grease from being squeezed out, increasing service life
- ⑤ **Integrated gripping force safety device**
  - Spring built into cylinder chamber as an energy store
- ⑥ **Mounting and positioning**
  - Alternatively, on several sides for customized mounting
- ⑦ **Position sensing**
  - integrated Hallsensor
- ⑧ **Integrated valve technology**
  - Activation of the gripper by means of a compressed air supply
- ⑨ **Integrated control module**
  - Single-cable solution via IO-Link
  - Pressure, temperature, position and other parameters are readable

## ► TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GPP5006IL	3 - 6	330 - 1080	0,45 - 0,53	IP64
GPP5008IL	4 - 8	520 - 1670	0,75 - 0,87	IP64
GPP5010IL	5 - 10	885 - 2890	1,23 - 1,45	IP64

## ► FURTHER INFORMATION IS AVAILABLE ONLINE



All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

# 2-JAW PARALLEL GRIPPERS


## SERIES GPP5000IL FUNCTIONAL DESCRIPTION



### GRIPPING COMPONENTS

2


Series GPP5000IL / 2-Jaw Parallel Grippers / pneumatic / Grippers

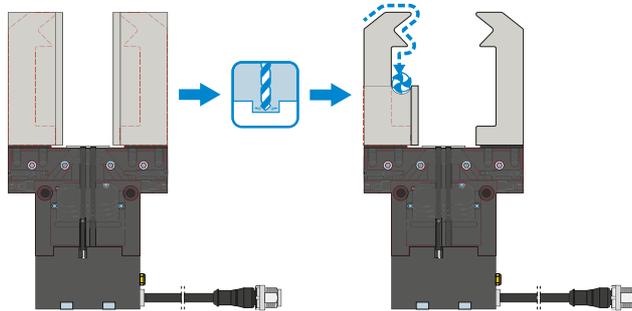

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

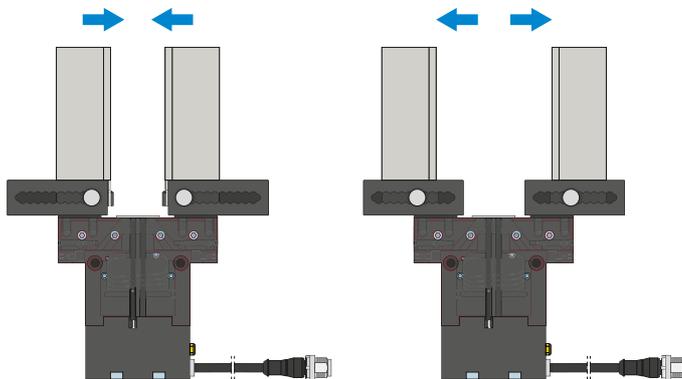

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

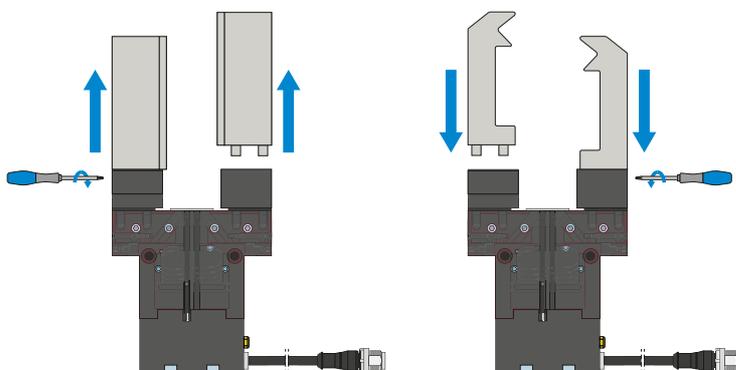

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.




## ENERGY SUPPLY

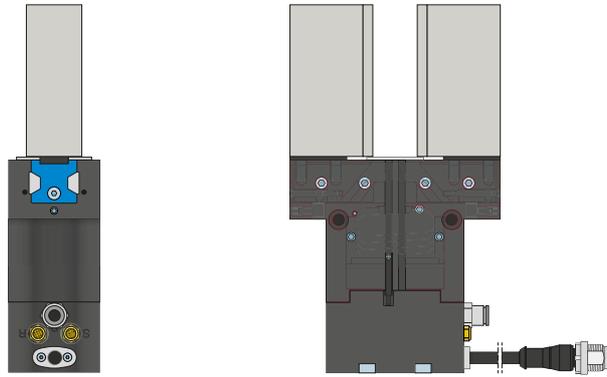

### Pneumatic threaded connections

Available in straight and angled design. Can be chosen freely depending on the space conditions or installation situation.

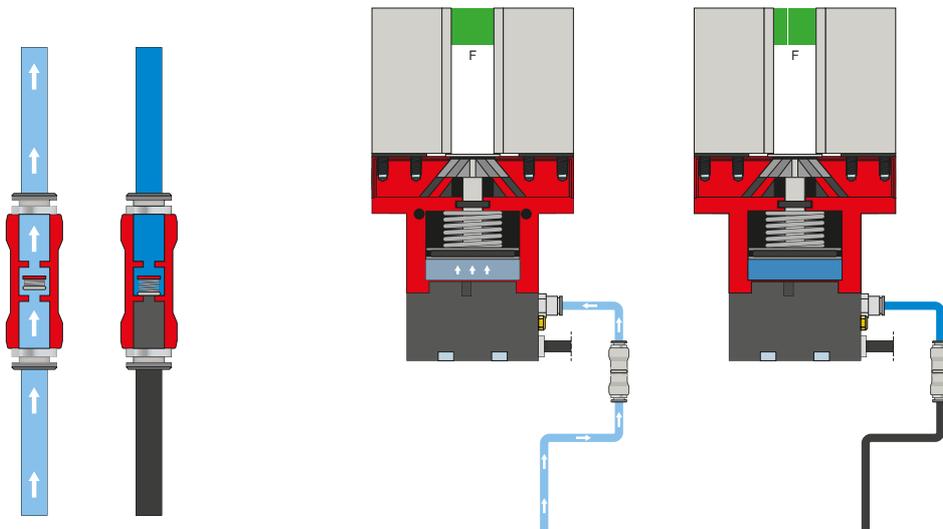

### Pressure safety valve – DSV


The throttle check valve integrated into the supply air line retains the system pressure in case of EMERGENCY STOP. To ensure the function, the valve must be installed as close to the gripper's air connection as possible. Control voltage and actuator voltage must be maintained for this purpose.

# 2-JAW PARALLEL GRIPPERS

## SERIES GPP5000IL FUNCTIONAL DESCRIPTION



### CONNECTIONS / OTHER

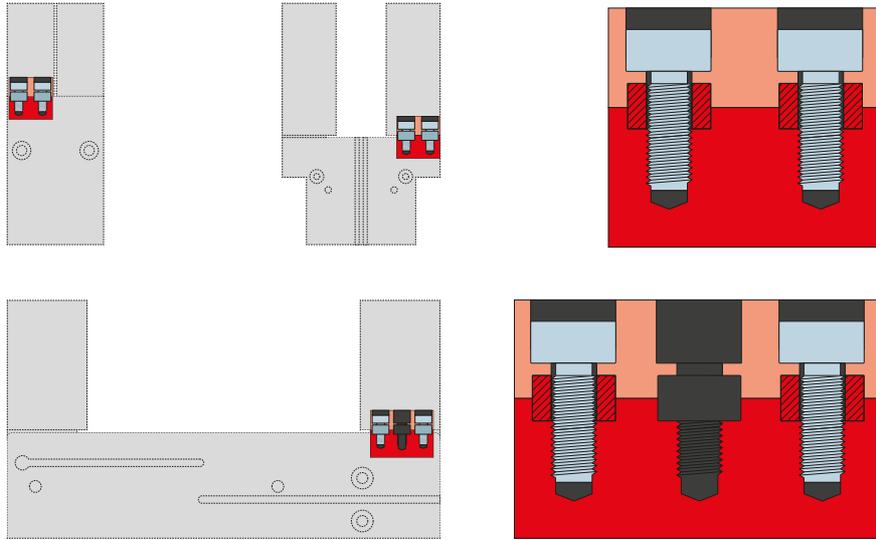

#### Centering sleeves

For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.




# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5006IL

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

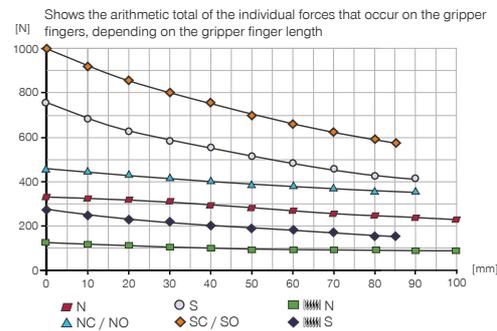

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.





Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250

### ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5006N-IL-10-A	GPP5006NC-IL-10-A	GPP5006NQ-IL-10-A	GPP5006S-IL-10-A	GPP5006SC-IL-10-A	GPP5006SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	6	6	6	3	3	3
Gripping force in closing [N]	330	455		740	1020	
Gripping force in opening [N]	360		485	800		1080
Gripping force secured by spring min. [N]		125	125		280	280
Cycle count max. [cycle/min]	360	250	250	360	250	250
Permissible weight per jaw max [kg]	0.4	0.4	0.4	0.4	0.4	0.4
Length of the gripper fingers max. [mm]	100	90	90	90	85	85
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	11	24	24	11	24	24
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.45	0.53	0.53	0.45	0.53	0.53

## TECHNICAL DRAWINGS

NC / NO / SC / SO

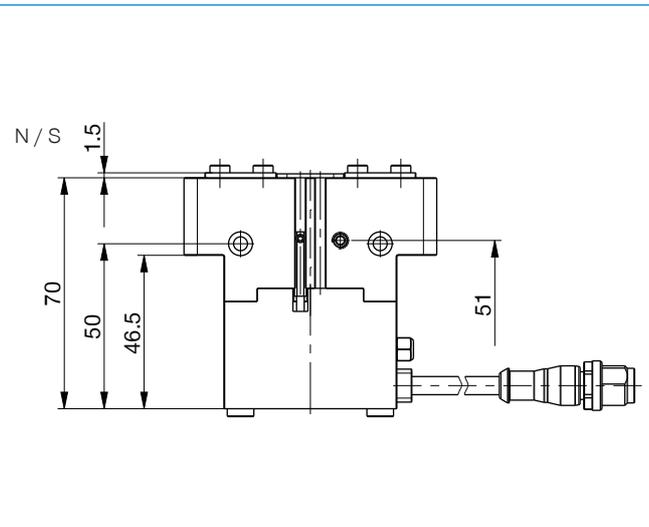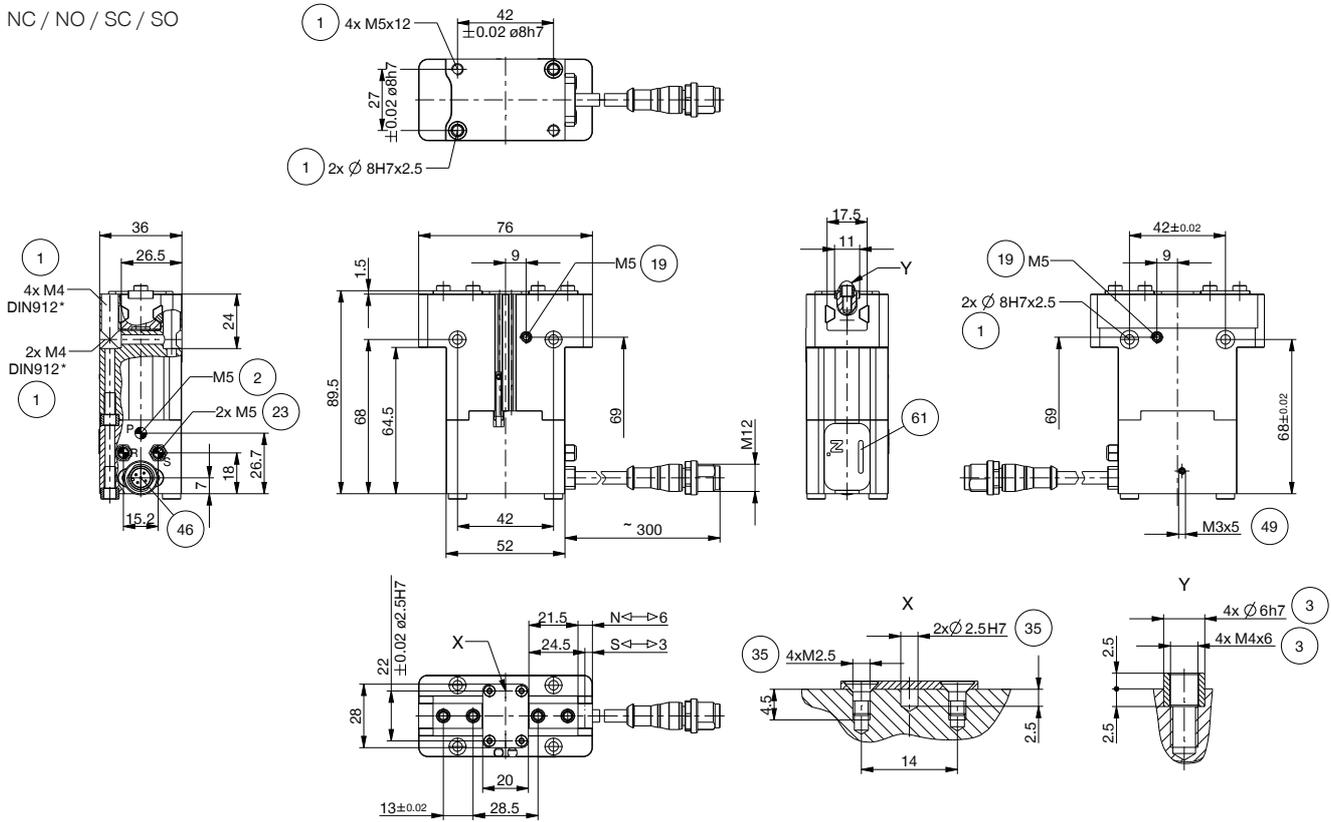


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ④⑥ Energy supply IO-Link (M12, 5-pole)
- ④⑨ Ground
- ⑥① Status display

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5006IL

### ▶ ACCESORIES

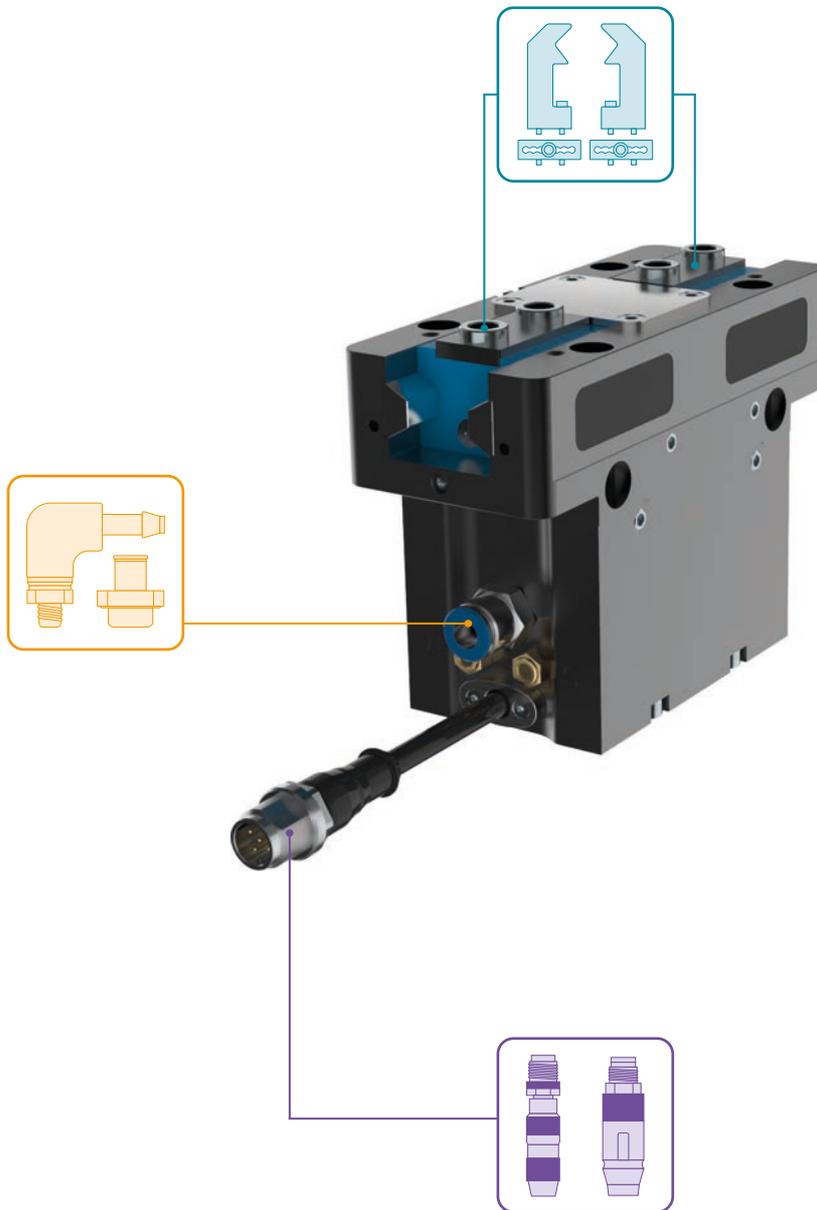

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

024230



2 [piece]  
Centering Disc

024231



2 [piece]  
Filters

CFILT00010

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**DSV06**  
Return valve



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5008IL

### ▶ PRODUCT SPECIFICATIONS

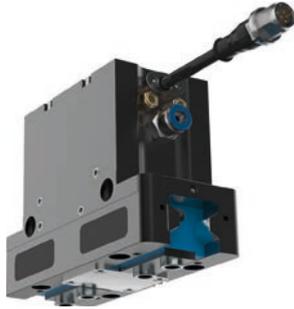


#### ▶ Gripping force diagram

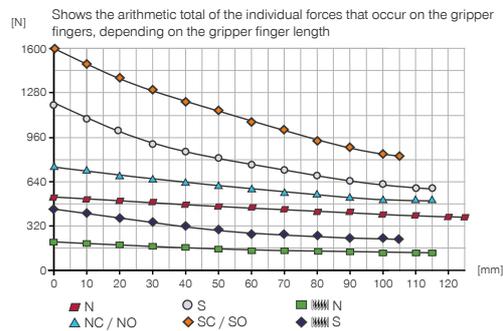

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.





Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

### ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5008N-IL-10-A	GPP5008NC-IL-10-A	GPP5008NO-IL-10-A	GPP5008S-IL-10-A	GPP5008SC-IL-10-A	GPP5008SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	8	8	8	4	4	4
Gripping force in closing [N]	520	710		1150	1580	
Gripping force in opening [N]	560		750	1240		1670
Gripping force secured by spring min. [N]		190	190		430	430
Cycle count max. [cycle/min]	290	200	200	290	200	200
Permissible weight per jaw max [kg]	0.7	0.7	0.7	0.7	0.7	0.7
Length of the gripper fingers max. [mm]	125	115	115	115	105	105
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	22	43	43	22	43	43
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.75	0.87	0.87	0.75	0.87	0.87

▶ TECHNICAL DRAWINGS

NC / NO / SC / SO

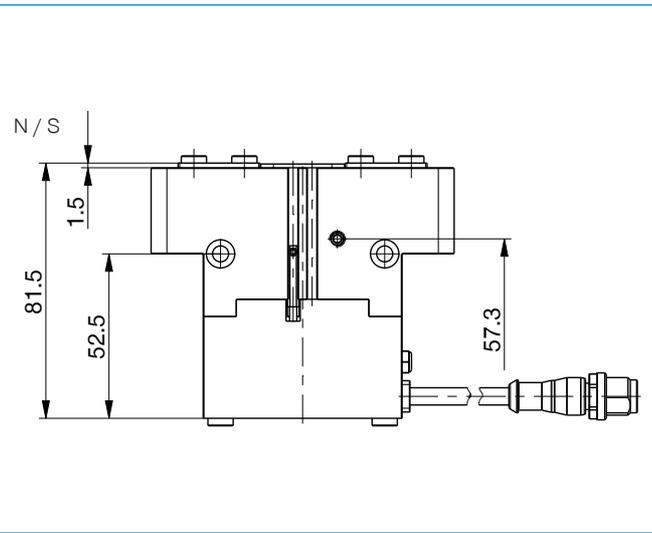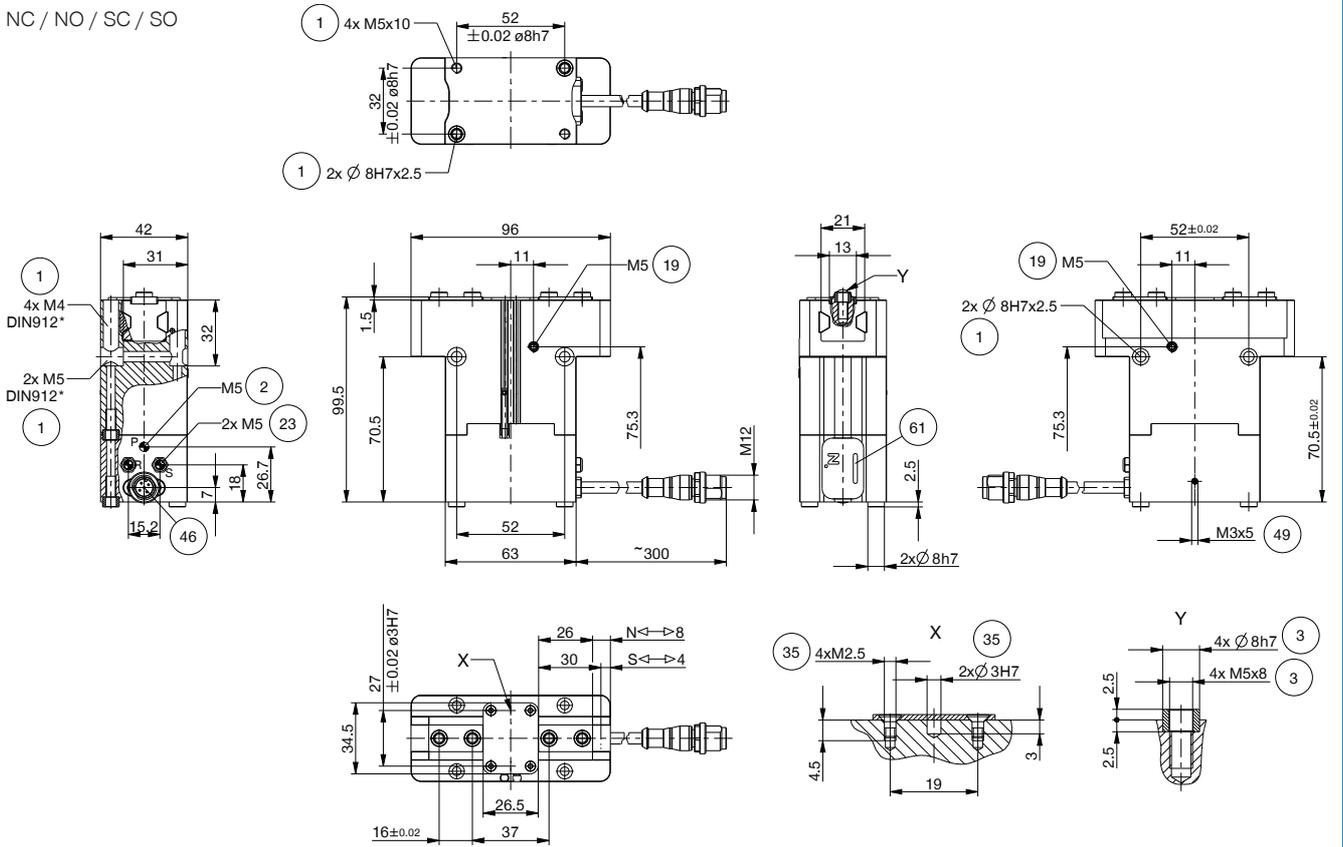


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑲ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ⑳ Attachment option for customer-specific fittings
- ⑳ Energy supply IO-Link (M12, 5-pole)
- ⑹ Ground
- ⑹ Status display



# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5008IL

### ▶ ACCESORIES

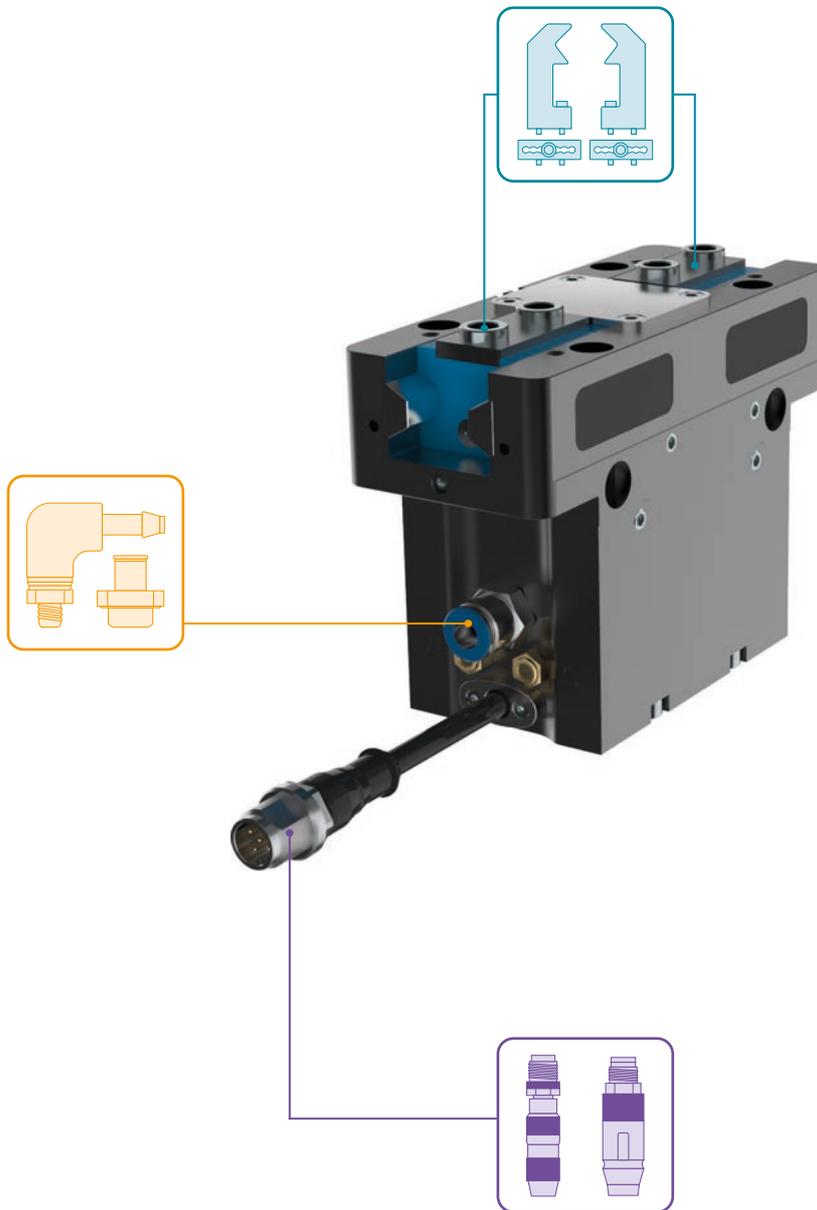

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231



2 [piece]  
Filters

CFILT00010

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**DSV06**  
Return valve



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5010IL

### ▶ PRODUCT SPECIFICATIONS

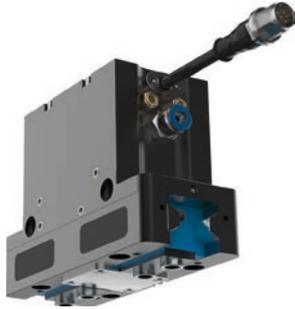


#### ▶ Gripping force diagram

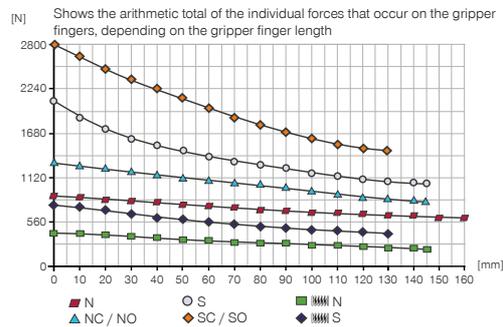

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.





Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700

### ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5010N-IL-10-A	GPP5010NC-IL-10-A	GPP5010NO-IL-10-A	GPP5010S-IL-10-A	GPP5010SC-IL-10-A	GPP5010SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	10	10	10	5	5	5
Gripping force in closing [N]	885	1260		1940	2750	
Gripping force in opening [N]	945		1320	2080		2890
Gripping force secured by spring min. [N]		375	375		810	810
Cycle count max. [cycle/min]	230	150	150	230	150	150
Permissible weight per jaw max [kg]	1.3	1.3	1.3	1.3	1.3	1.3
Length of the gripper fingers max. [mm]	160	145	145	145	130	130
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	44	92	92	44	92	92
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	1.23	1.45	1.45	1.23	1.45	1.45

## TECHNICAL DRAWINGS

NC / NO / SC / SO

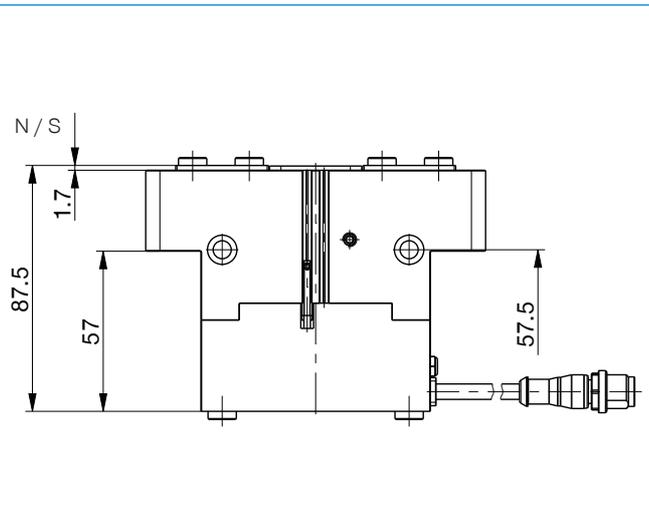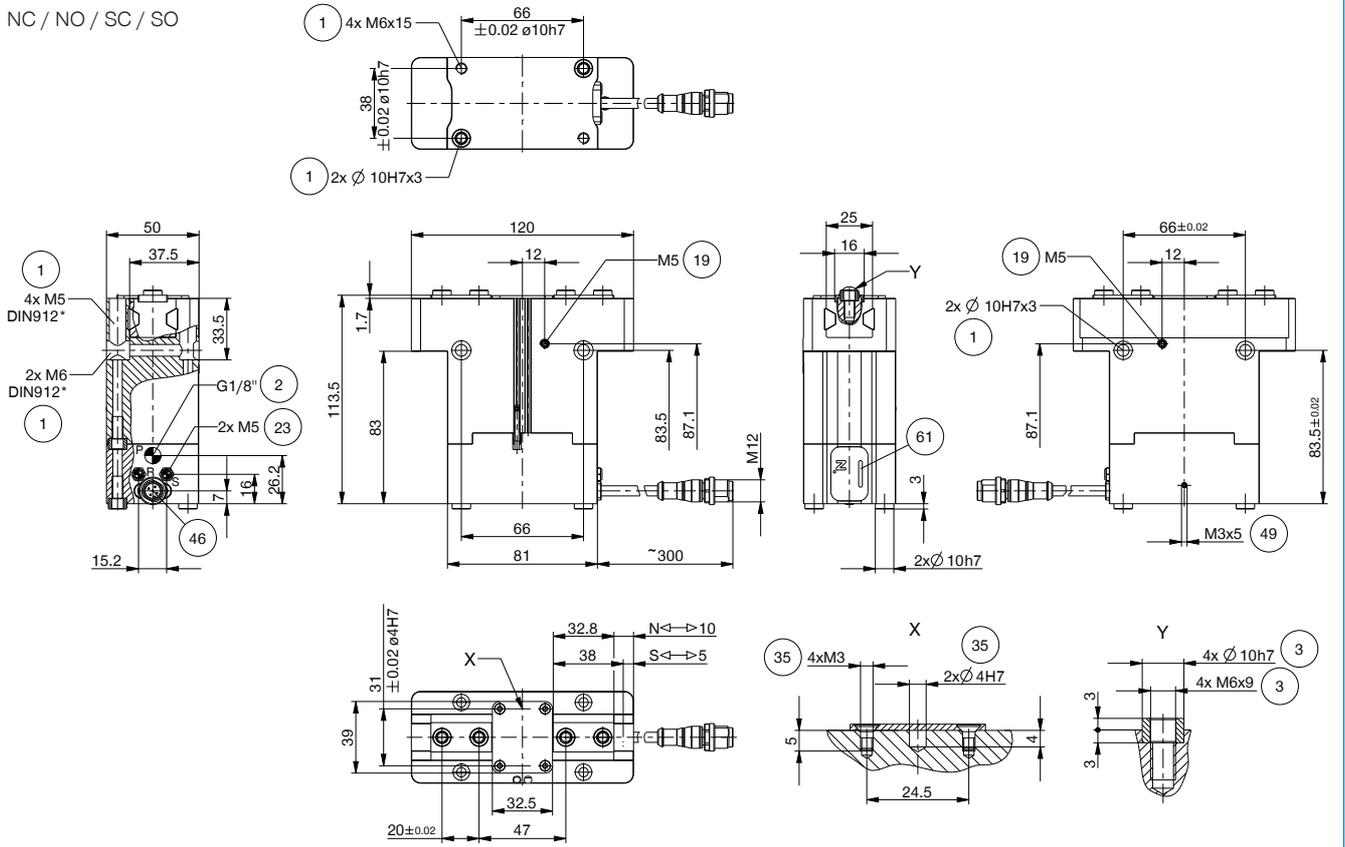


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ④⑥ Energy supply IO-Link (M12, 5-pole)
- ④⑨ Ground
- ⑥① Status display



# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5010IL

### ▶ ACCESSORIES

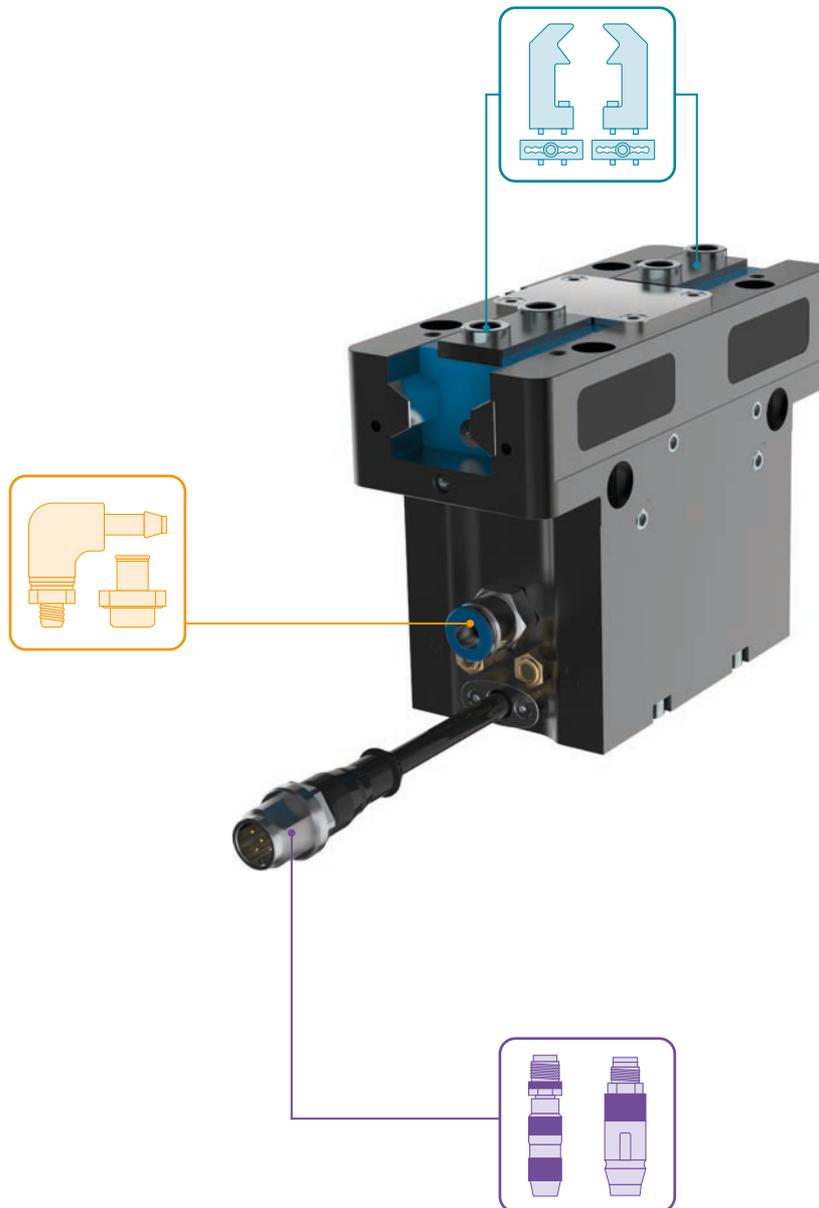

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187



2 [piece]  
Filters

CFILT00010

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5013IL

### ▶ PRODUCT SPECIFICATIONS

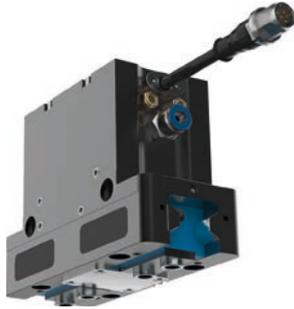


#### ▶ Gripping force diagram

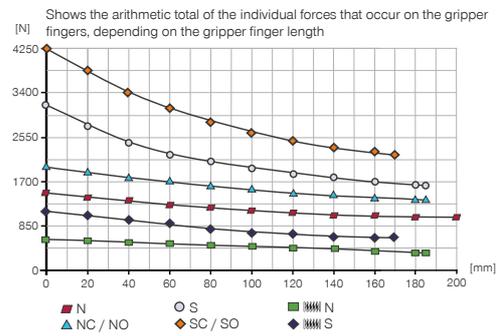

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	110
Mx [Nm]	150
My [Nm]	130
Fa [N]	3300

### ▶ TECHNICAL DATA


Order no.	▶ Technical data					
	GPP5013N-IL-10-A	GPP5013NC-IL-10-A	GPP5013NO-IL-10-A	GPP5013S-IL-10-A	GPP5013SC-IL-10-A	GPP5013SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	13	13	13	6	6	6
Gripping force in closing [N]	1410	1920		3100	4220	
Gripping force in opening [N]	1490		1860	3280		4400
Gripping force secured by spring min. [N]		510	510		1120	1120
Permissible weight per jaw max [kg]	2.4	2.4	2.4	2.4	2.4	2.4
Length of the gripper fingers max. [mm]	200	185	185	185	170	170
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	88	171	171	88	171	171
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	2.5	2.9	2.9	2.5	2.9	2.9

▶ TECHNICAL DRAWINGS

NC / NO / SC / SO

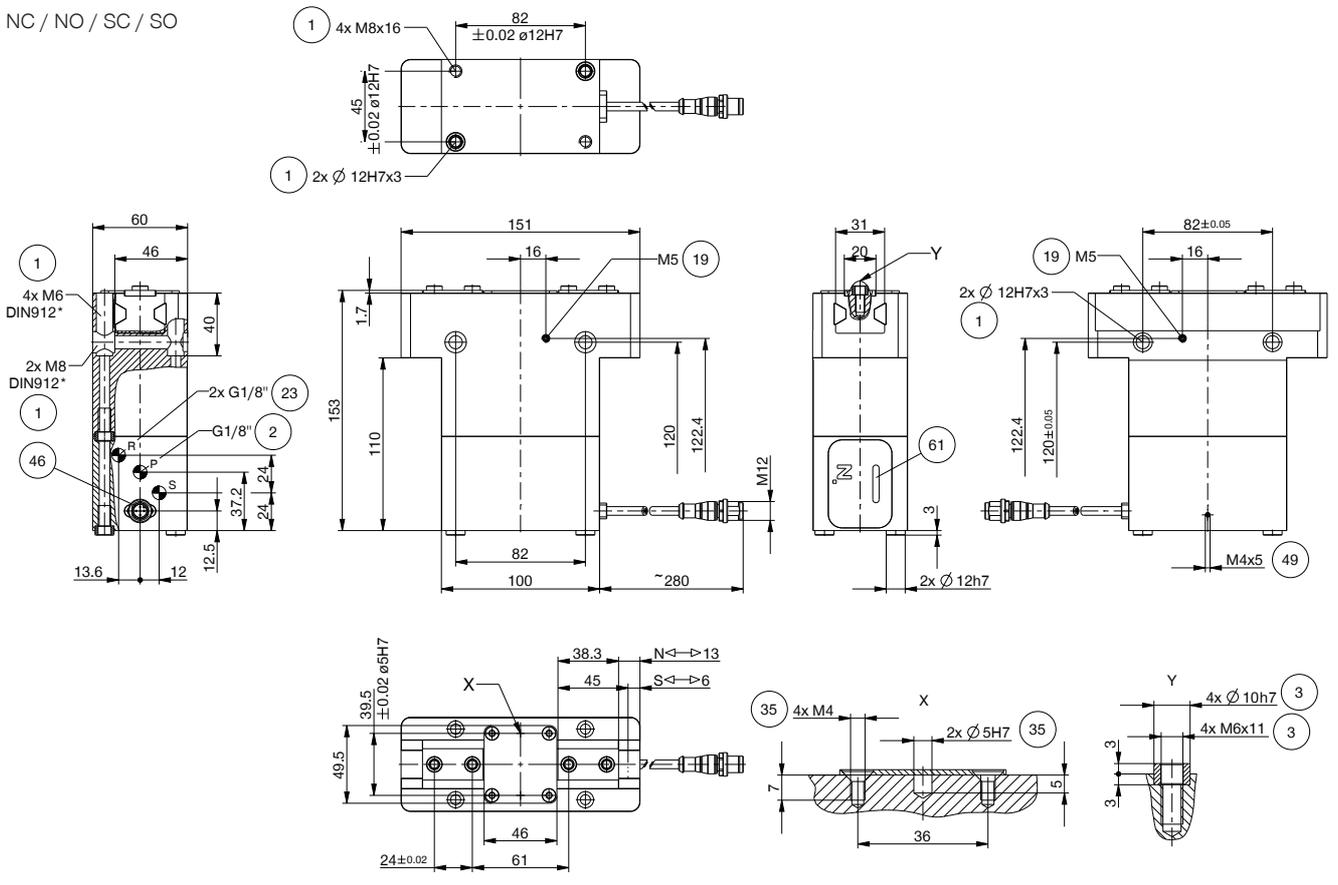

N / S

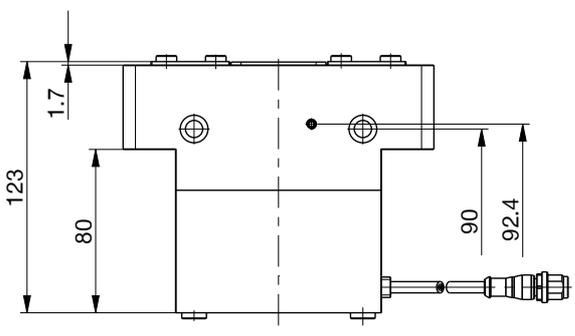


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ④⑥ Energy supply IO-Link (M12, 5-pole)
- ④⑨ Ground
- ⑥① Status display



# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5013IL

### ▶ ACCESSORIES

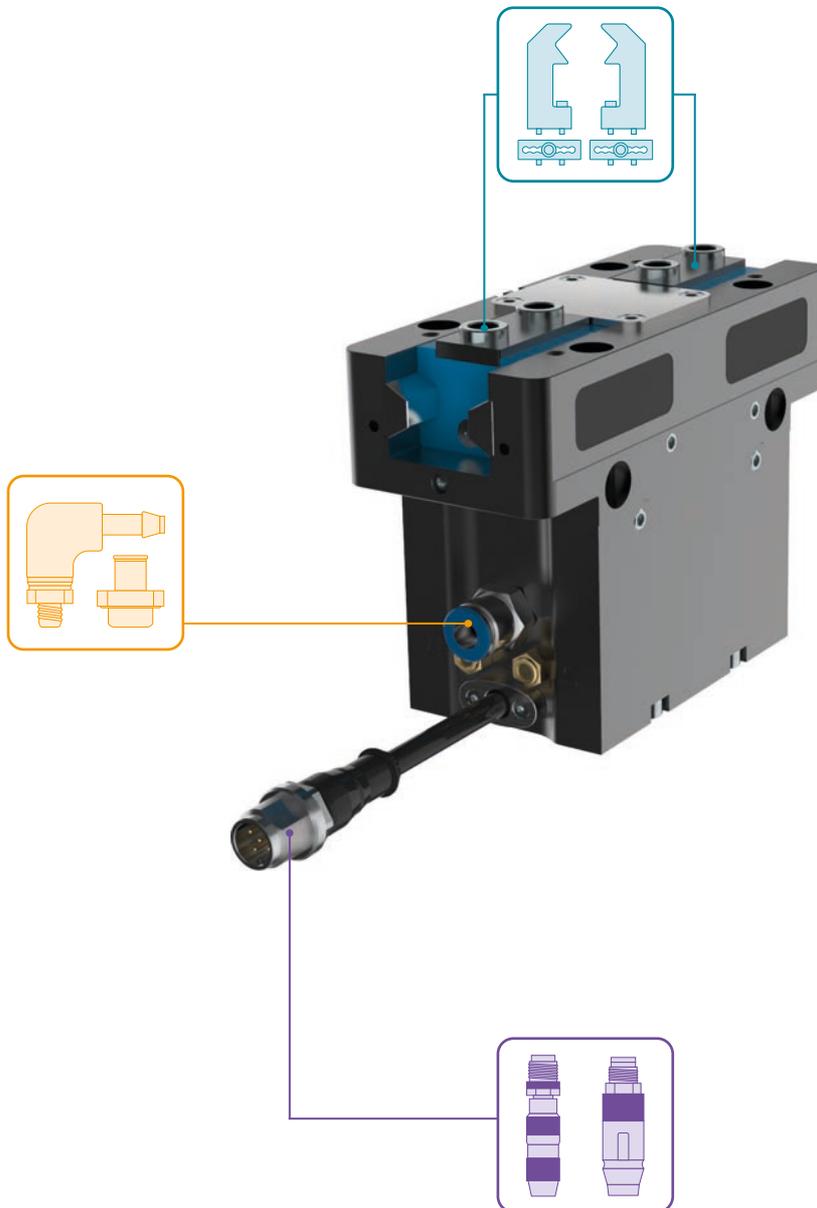

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5013AL**  
Universal jaw aluminium



**UB5013ST**  
Universal jaw steel



**EB5013AL**  
Aluminum adjustment jaw



**EB5013ST**  
Steel adjustment jaw



**WB5013L**  
Changeable jaw, loose-part-set



**WB5013F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5016IL

### ▶ PRODUCT SPECIFICATIONS

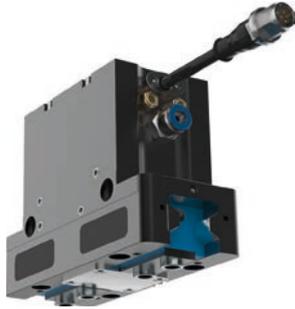


#### ▶ Gripping force diagram

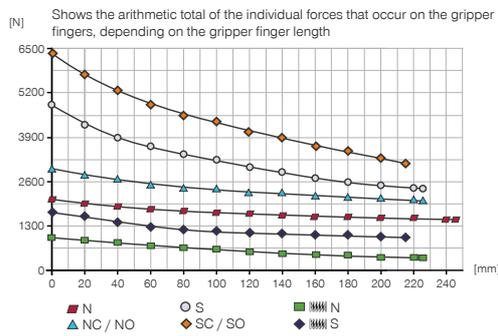

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	145
Mx [Nm]	195
My [Nm]	185
Fa [N]	5200

### ▶ TECHNICAL DATA


Order no.	▶ Technical data					
	GPP5016N-IL-10-A	GPP5016NC-IL-10-A	GPP5016NO-IL-10-A	GPP5016S-IL-10-A	GPP5016SC-IL-10-A	GPP5016SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	16	16	16	8	8	8
Gripping force in closing [N]	2090	2860		4610	6310	
Gripping force in opening [N]	2220		2990	4900		6600
Gripping force secured by spring min. [N]		770	770		1700	1700
Permissible weight per jaw max [kg]	3.8	3.8	3.8	3.8	3.8	3.8
Length of the gripper fingers max. [mm]	245	225	225	225	215	215
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	166	332	332	166	332	332
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	4.4	5.1	5.1	4.4	5.1	5.1



# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5016IL

### ▶ ACCESSORIES

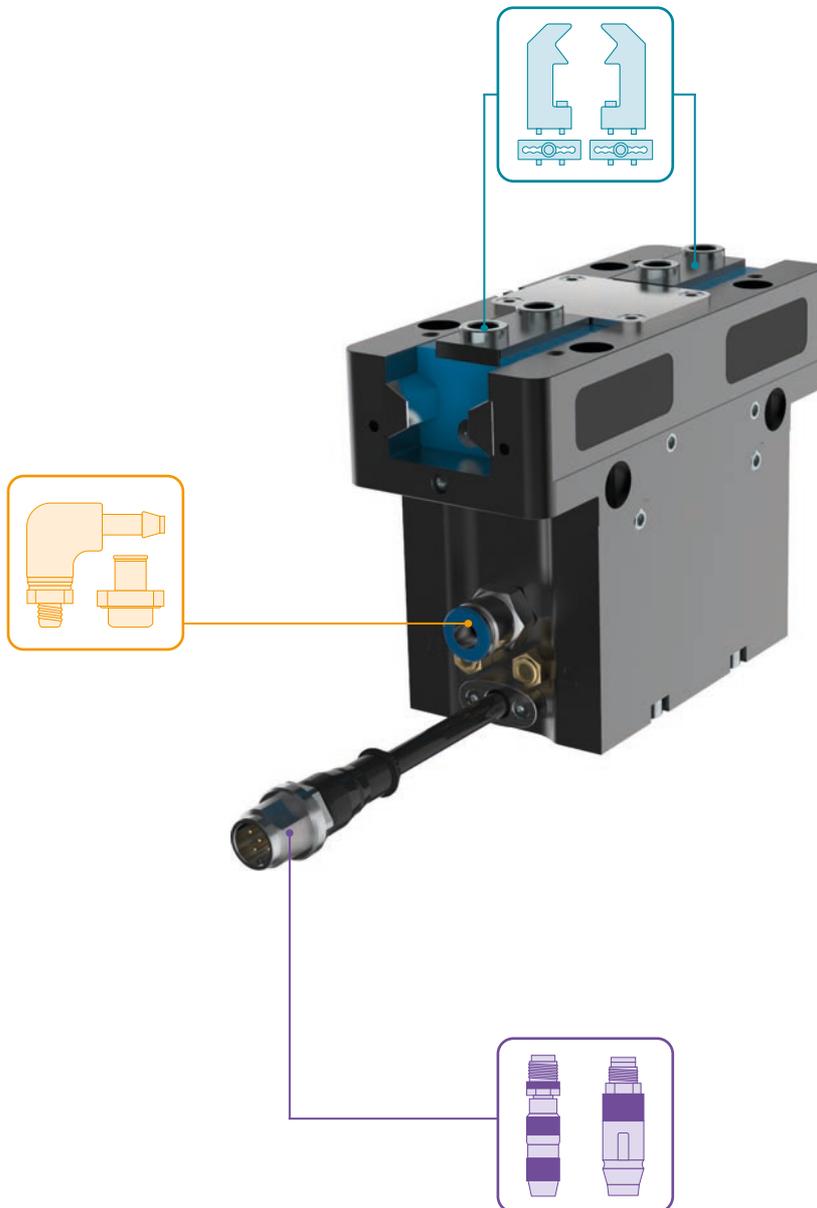

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

019387



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5016AL**  
Universal jaw aluminium



**UB5016ST**  
Universal jaw steel



**EB5016AL**  
Aluminum adjustment jaw



**EB5016ST**  
Steel adjustment jaw



**WB5016L**  
Changeable jaw, loose-part-set



**WB5016F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5025IL

### ▶ PRODUCT SPECIFICATIONS

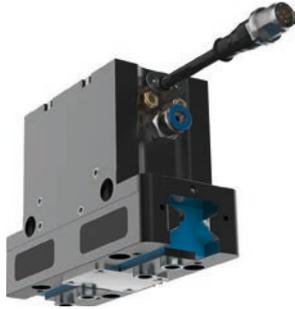


#### ▶ Gripping force diagram

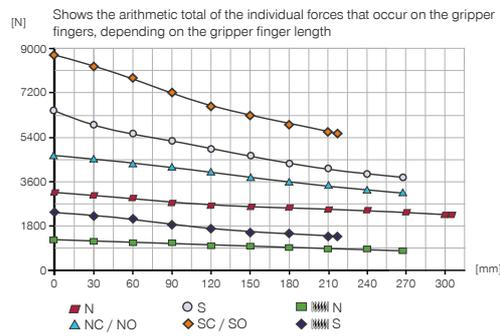

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.





Mr [Nm]	180
Mx [Nm]	205
My [Nm]	225
Fa [N]	7500

### ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPP5025N-IL-10-A	GPP5025NC-IL-10-A	GPP5025NO-IL-10-A	GPP5025S-IL-10-A	GPP5025SC-IL-10-A	GPP5025SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	25	25	25	14	14	14
Gripping force in closing [N]	3280	4510		6360	8730	
Gripping force in opening [N]	3490		4710	6760		9130
Gripping force secured by spring min. [N]		1220	1220		2370	2370
Permissible weight per jaw max [kg]	7	7	7	7	7	7
Length of the gripper fingers max. [mm]	310	265	265	265	220	220
Repetition accuracy +/- [mm]	0.02	0.02	0.02	0.02	0.02	0.02
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	420	830	830	420	830	830
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	8.5	10.4	10.4	8.5	10.4	10.4

## TECHNICAL DRAWINGS

NC / NO / SC / SO

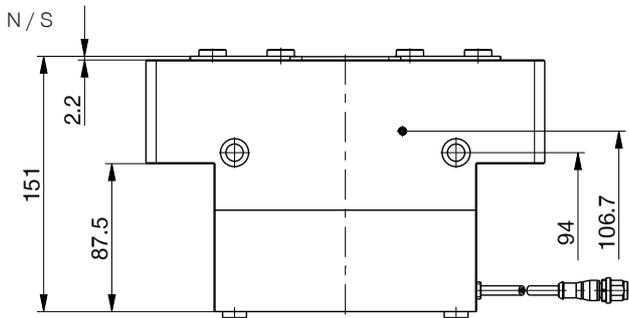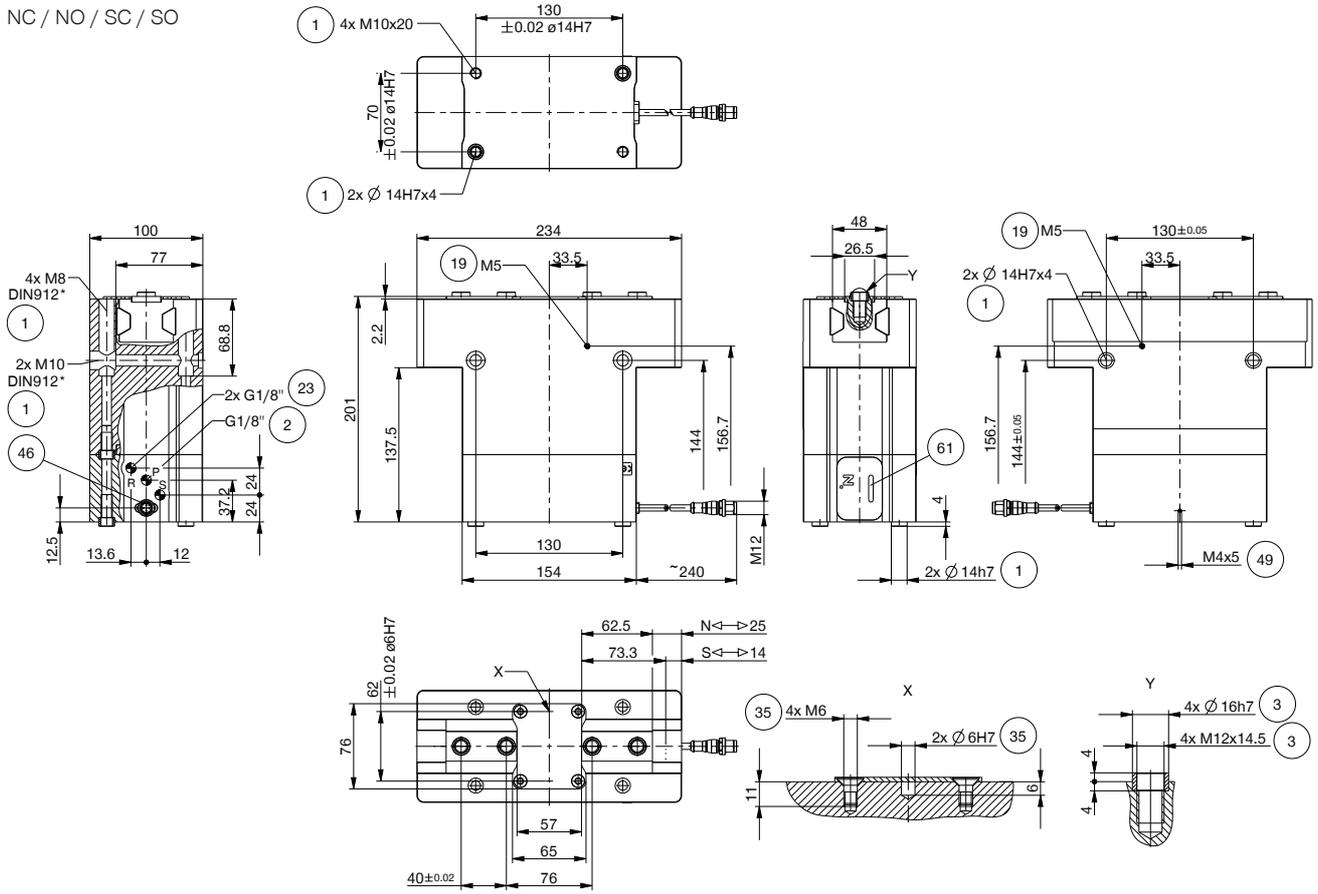


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑲ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ⑳ Attachment option for customer-specific fittings
- ⑼ Energy supply IO-Link (M12, 5-pole)
- ⑽ Ground
- ⑾ Status display

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GPP5025IL

### ▶ ACCESSORIES

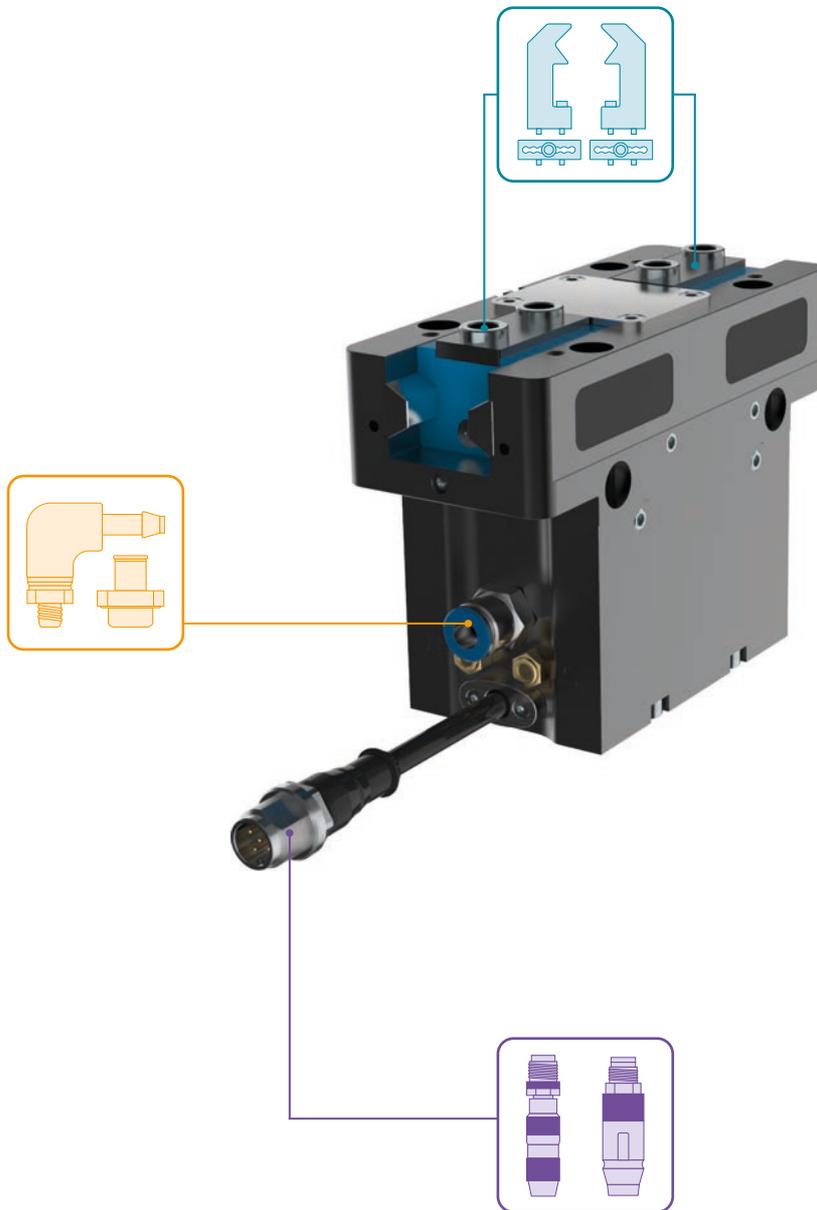

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

030529



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5025AL**  
Universal jaw aluminium



**UB5025ST**  
Universal jaw steel



**EB5025AL**  
Aluminum adjustment jaw



**EB5025ST**  
Steel adjustment jaw



**WB5025L**  
Changeable jaw, loose-part-set



**WB5025F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# SECURED CONFIGURATION EXAMPLES

## GPP5000IL / GPD5000IL SERIES


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (BECKHOFF)

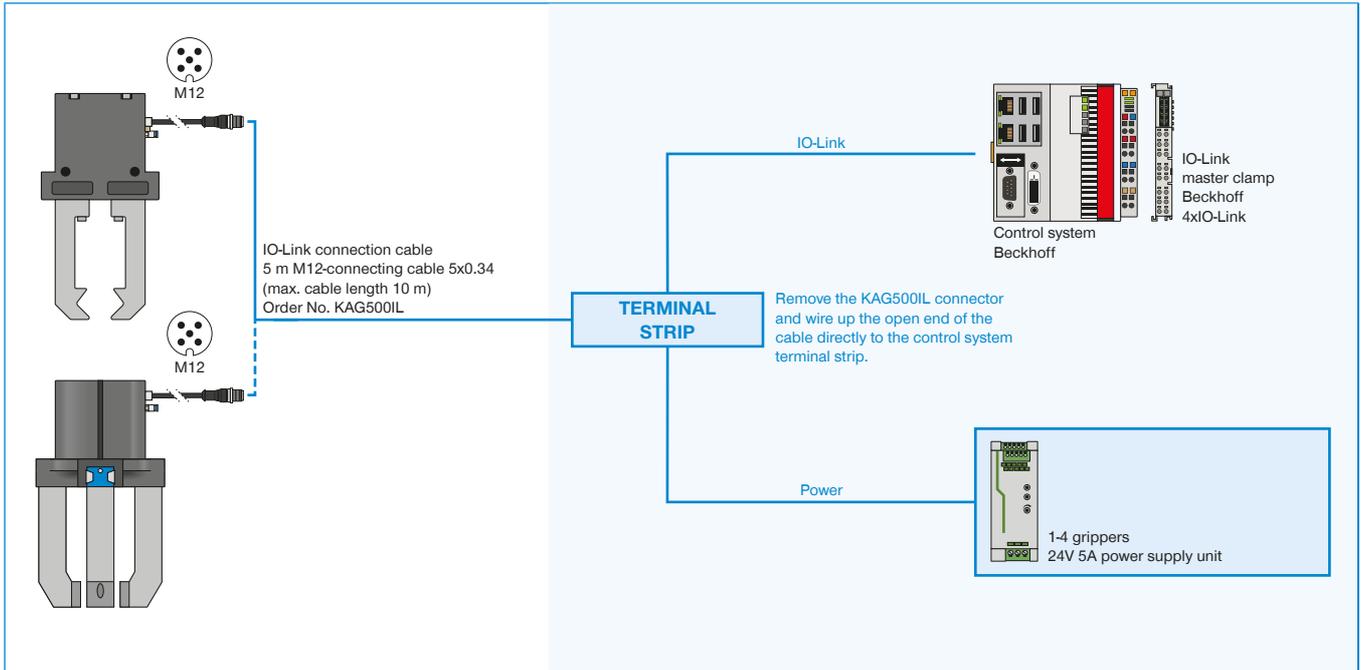


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (SIEMENS)

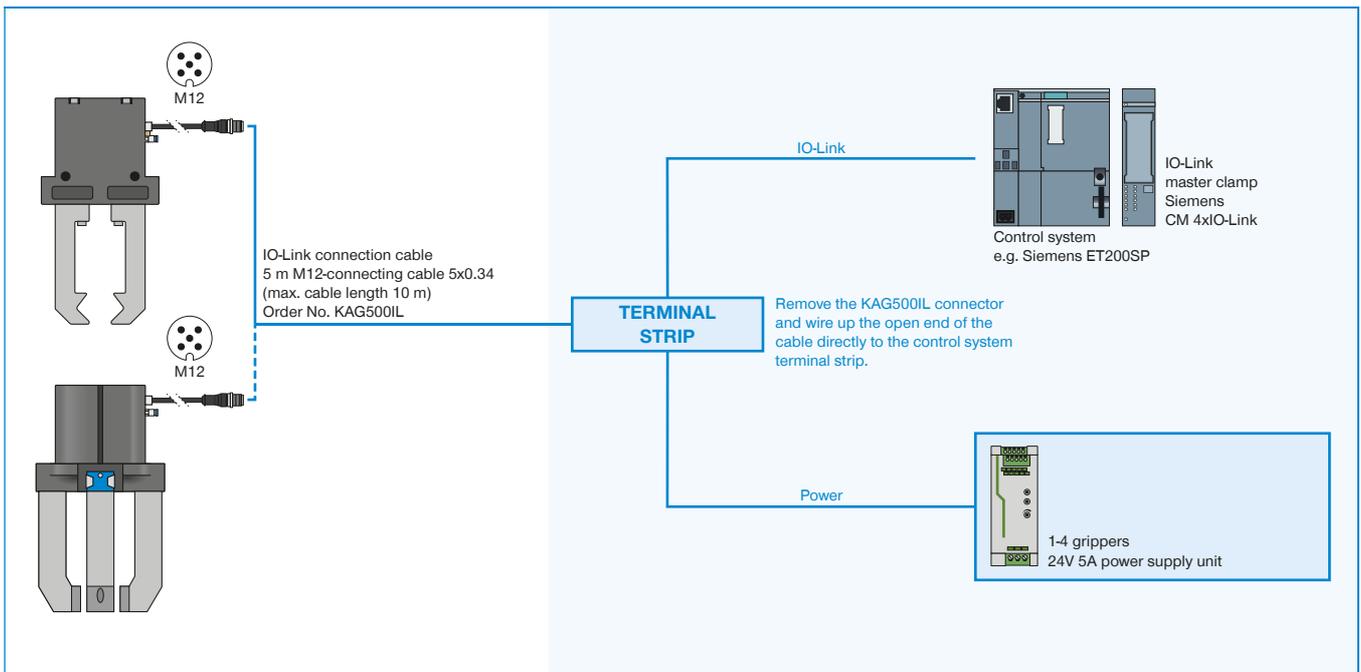

▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

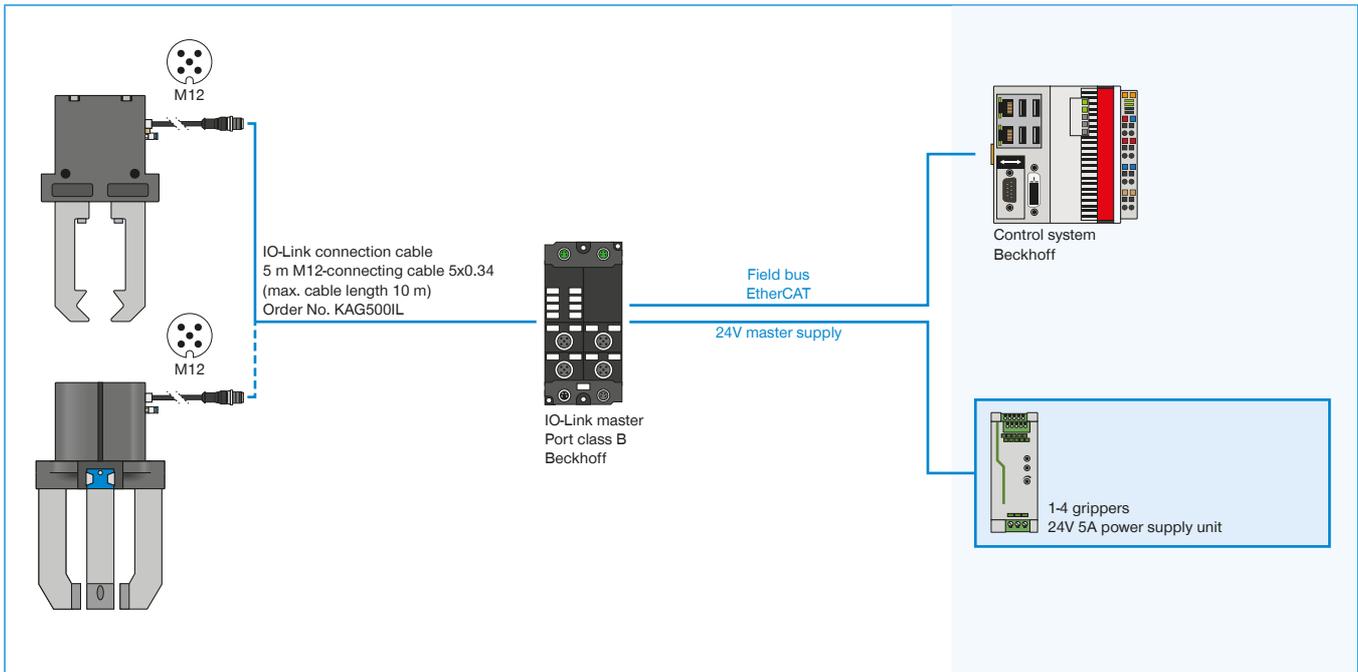


▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (SIEMENS)

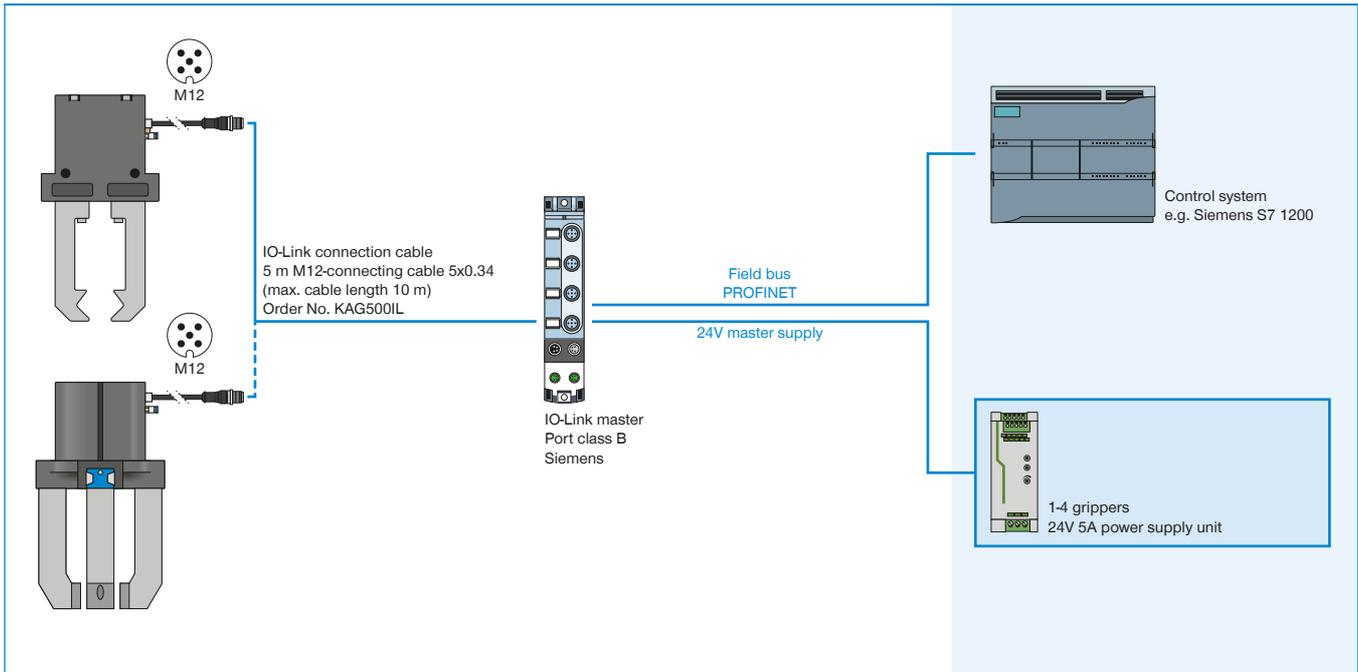

# 2-JAW PARALLEL GRIPPERS

## SERIES GEP5000

### ▶ PRODUCT ADVANTAGES

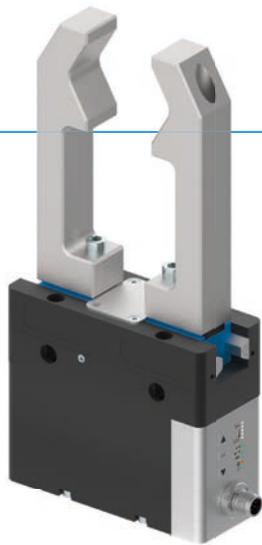

IO-Link

#### “ALL in ONE”

- ▶ Approximately the same gripping force as a comparable pneumatic gripper
- ▶ Self locking mechanism in case of power drop
- ▶ Same connection hole patterns as a comparable pneumatic gripper
- ▶ Plug and play – single-cable solution, supports incredibly easy control using I/O signals or IO-Link
- ▶ Integrated ACM control module - option of configuring gripping force, travel time and switching points
- ▶ Protected from corrosion and sealed in accordance with IP64
- ▶ Brushless DC motor – up to 30 million cycles without maintenance



reddot design award  
winner 2018

### ▶ SERIES CHARACTERISTICS

Installation size	Variants	
GEP50XX	IL-00	IO-00
 IO-Link	●	
 Digital I/O		●
 30 million maintenance-free cycles (max.)	●	●
 Integrated sensing	●	●
 Gripping force adjustable	●	●
 Self locking mechanism	●	●
 Protected against corrosion	●	●
 Purged air	●	●
 IP64	●	●



## ► BENEFITS IN DETAIL



- 1 Wedge hook mechanism**
  - Supports to absorb high forces and moments
  - Synchronized gripper jaw movement
- 2 Gripper jaw**
  - Gripper fingers mounted using removable centering sleeves
  - Lubricated for life via incorporated lubrication slots
- 3 Dual lip seal**
  - Enables IP64
  - Prevents grease from being squeezed out, increasing service life
- 4 Steel Linear Guide**
  - Steel in steel guide
  - Enables use of extremely long gripper fingers
- 5 Mounting and positioning**
  - Alternatively, on several sides for customized mounting
  - Pneumatic and electrical versions identical apart from height
- 6 BLDC motor**
  - wear-resistant brushless DC motor
- 7 Advanced control module**
  - Integrated control module with single-cable solution
  - Gripping force, travel time and query programmable via the control panel on the housing
- 8 Drive train**
  - Combination of trapezoidal spindle and gear
  - Durable and robust

## ► TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GEP5006	6	540 - 960	0.79	IP64 *
GEP5008	8	650 - 1150	1.16	IP64 *
GEP5010	10	980 - 1520	1.66	IP64 *

\*with purged air (max. 0,5 bar)

## ► FURTHER INFORMATION IS AVAILABLE ONLINE




All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

# 2-JAW PARALLEL GRIPPERS

## SERIES GEP5000 FUNCTIONAL DESCRIPTION




### GRIPPING COMPONENTS

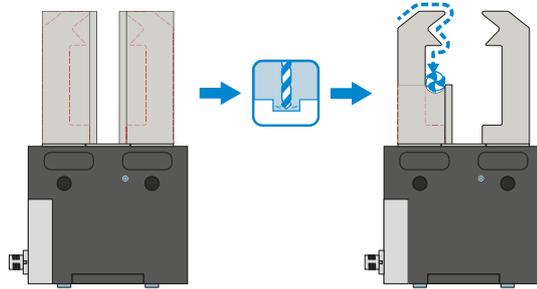

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

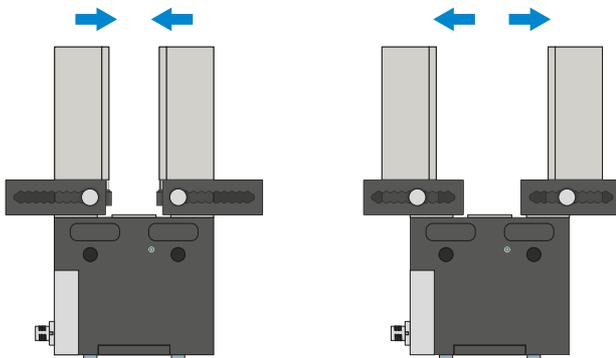

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

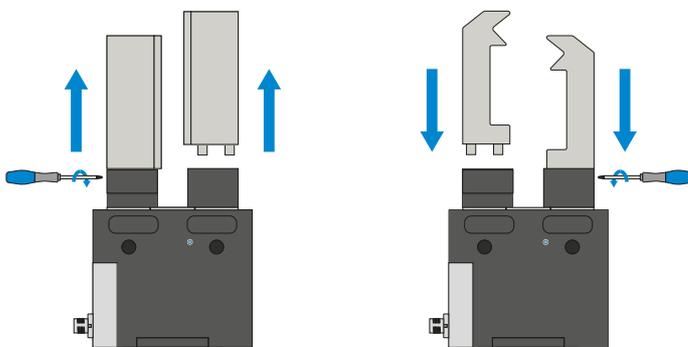

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.




## CONNECTIONS / OTHER

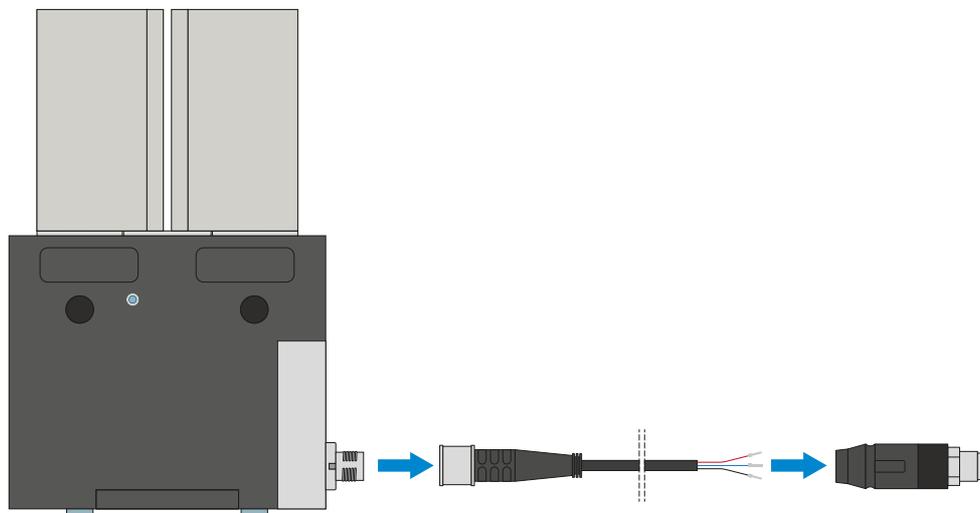

### Plug-in connectors

#### For extending and fabricating the connection lines

Cables with a length of 10 m with exposed leads are available. Depending on the specific needs, the cables can be shortened or fabricated with connectors in sizes M12. A 5 m long cable with connector / socket is available for the IO-Link connection.

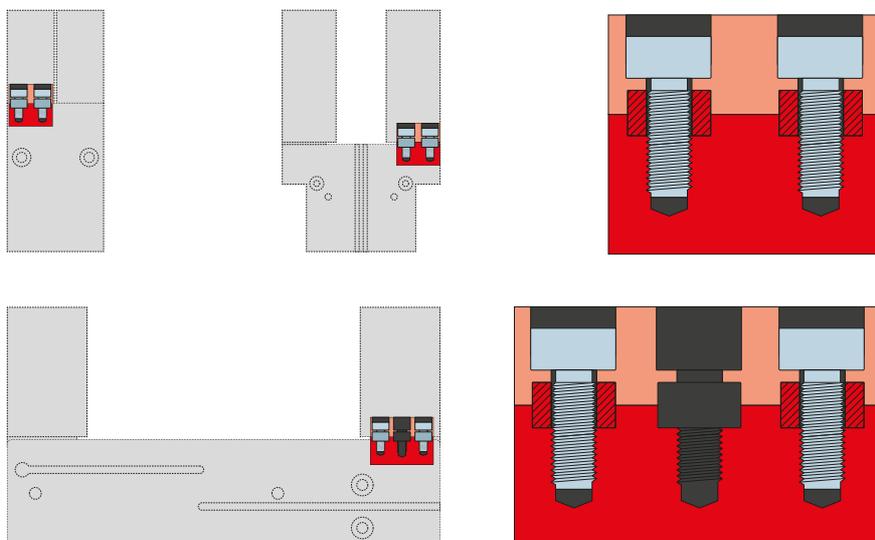

### Centering sleeves

#### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5006

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

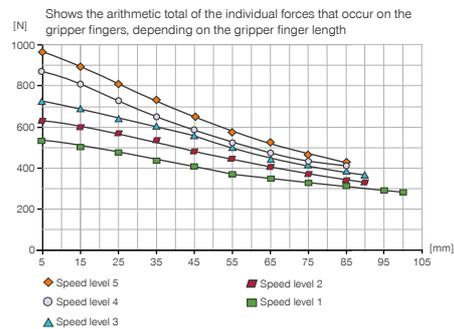

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GEP5006IL-00-A	GEP5006IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	6	6
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	0.4	0.4
Length of the gripper fingers max. [mm]	100	100
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	0.79	0.79

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES


Order no.	▶ Technical data - N mode	
	GEP5006IL-00-A	GEP5006IO-00-A
Gripping force → ← min. / max. [N]	540 / 960	540 / 960
Gripping force  ←→  min. / max. [N]	540 / 960	540 / 960
Travel time → ← min. / max. [s]	0,15 / 0,22	0,15 / 0,22
Travel time  ←→  min. / max. [s]	0,15 / 0,22	0,15 / 0,22

Order no.	▶ Technical data - NC mode	
	GEP5006IL-00-A	GEP5006IO-00-A
Gripping force → ← min. / max. [N]	540 / 960	540 / 960
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,15 / 0,22	0,15 / 0,22
Travel time  ←→  min. / max. [s]	0,13	0,13

Order no.	▶ Technical data - NO mode	
	GEP5006IL-00-A	GEP5006IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	540 / 960	540 / 960
Travel time → ← min. / max. [s]	0,13	0,13
Travel time  ←→  min. / max. [s]	0,15 / 0,22	0,15 / 0,22

## TECHNICAL DRAWINGS

- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

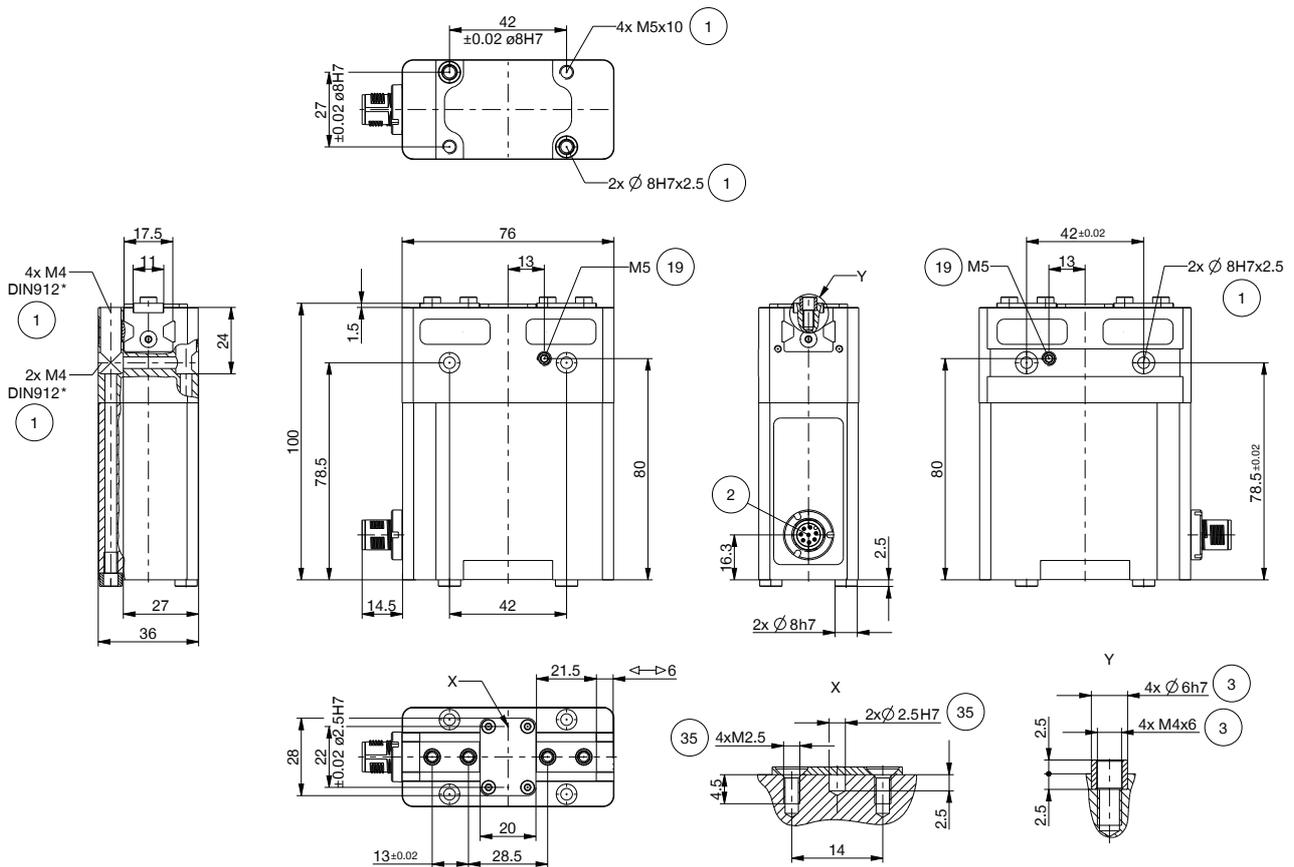

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5006

### ▶ ACCESSORIES



### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc


024230



2 [piece]  
Centering Disc

024231

### ▶ INFRASTRUCTURE IO-LINK

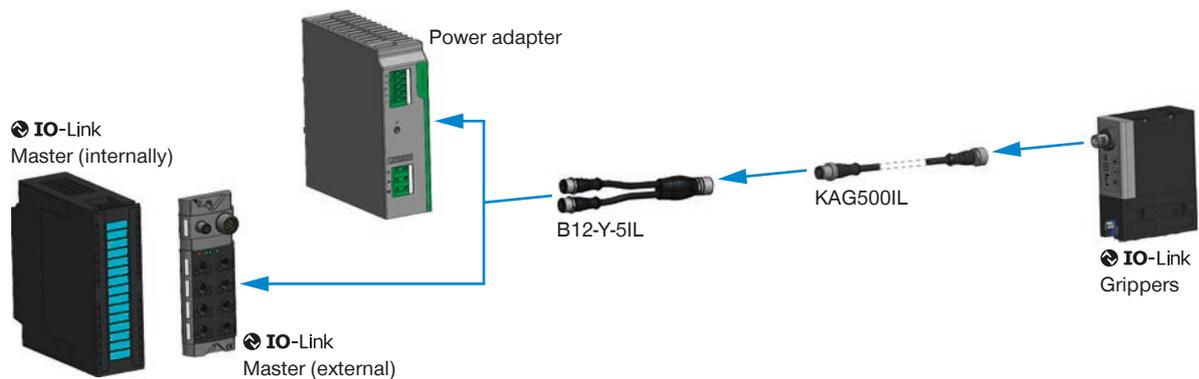

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part

## ▶ RECOMMENDED ACCESSORY GEP5006IL-00-A



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

## ▶ RECOMMENDED ACCESSORY GEP5006IO-00-A



### CONNECTIONS / OTHER



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12



**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5008

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

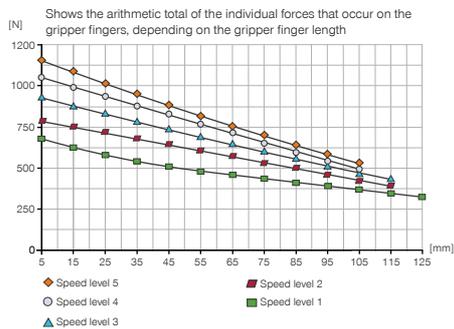

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GEP5008IL-00-A	GEP5008IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	8	8
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	0.7	0.7
Length of the gripper fingers max. [mm]	125	125
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	1.16	1.16

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES



Order no.	▶ Technical data - N mode	
	GEP5008IL-00-A	GEP5008IO-00-A
Gripping force → ← min. / max. [N]	650 / 1150	650 / 1150
Gripping force  ←→  min. / max. [N]	650 / 1150	650 / 1150
Travel time → ← min. / max. [s]	0,18 / 0,29	0,18 / 0,29
Travel time  ←→  min. / max. [s]	0,18 / 0,29	0,18 / 0,29

Order no.	▶ Technical data - NC mode	
	GEP5008IL-00-A	GEP5008IO-00-A
Gripping force → ← min. / max. [N]	650 / 1150	650 / 1150
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,18 / 0,29	0,18 / 0,29
Travel time  ←→  min. / max. [s]	0,15	0,15

Order no.	▶ Technical data - NO mode	
	GEP5008IL-00-A	GEP5008IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	650 / 1150	650 / 1150
Travel time → ← min. / max. [s]	0,15	0,15
Travel time  ←→  min. / max. [s]	0,18 / 0,29	0,18 / 0,29

## TECHNICAL DRAWINGS

- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

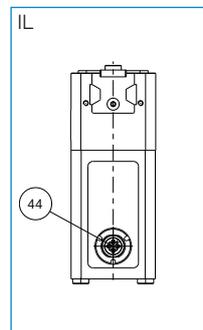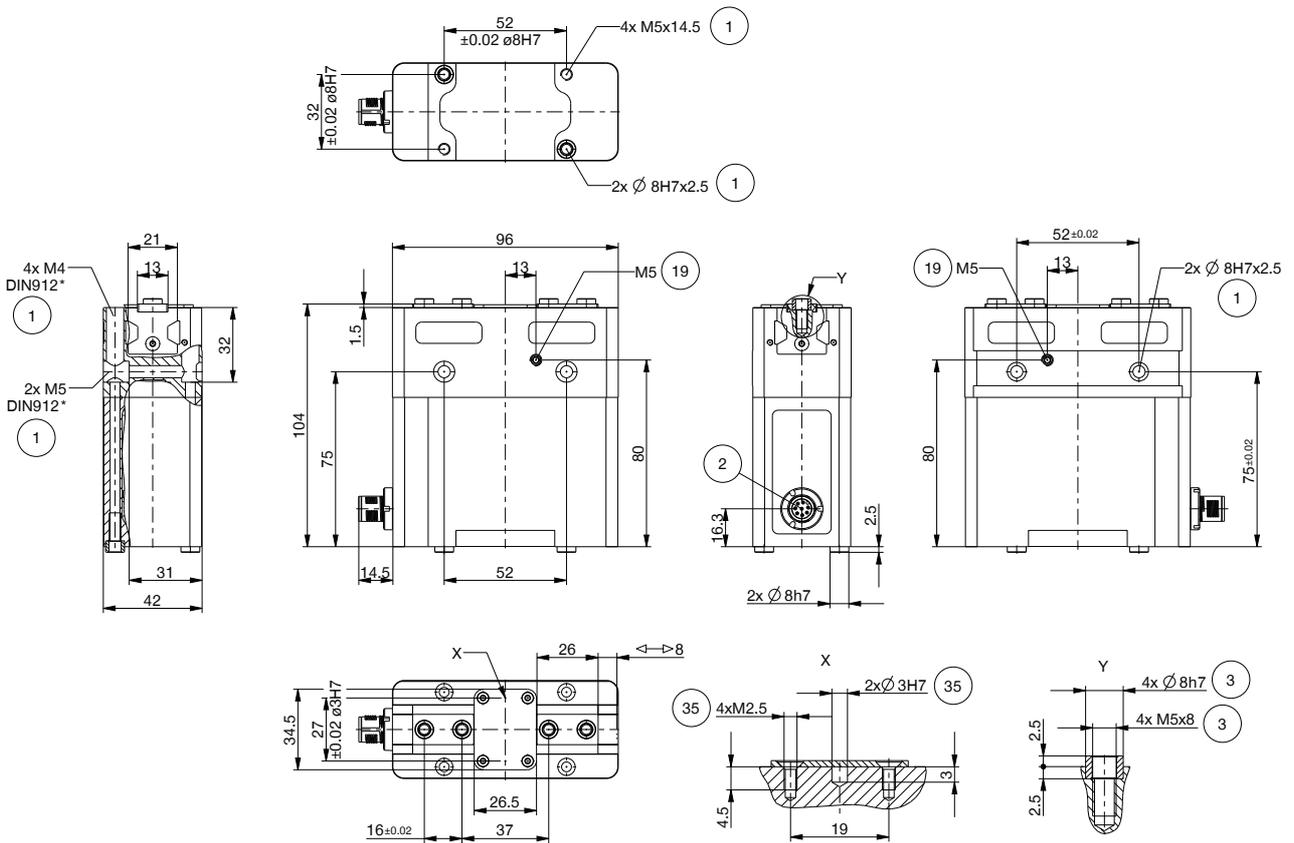

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5008

### ▶ ACCESORIES




### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231

### ▶ INFRASTRUCTURE IO-LINK

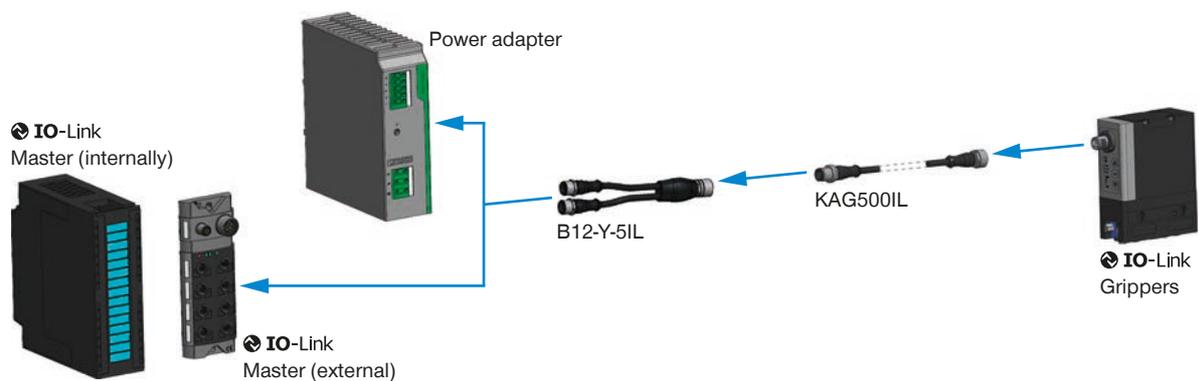

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set




**WB5008F**  
Changeable jaw, fix-part

## ▶ RECOMMENDED ACCESSORY GEP5008IL-00-A



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

## ▶ RECOMMENDED ACCESSORY GEP5008IO-00-A



### CONNECTIONS / OTHER



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12



**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5010

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

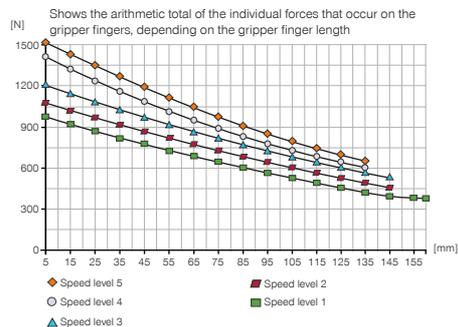

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GEP5010IL-00-A	GEP5010IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	10	10
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	1.3	1.3
Length of the gripper fingers max. [mm]	160	160
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	1.66	1.66

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES



Order no.	▶ Technical data - N mode	
	GEP5010IL-00-A	GEP5010IO-00-A
Gripping force → ← min. / max. [N]	980 / 1520	980 / 1520
Gripping force  ←→  min. / max. [N]	980 / 1520	980 / 1520
Travel time → ← min. / max. [s]	0,21 / 0,32	0,21 / 0,32
Travel time  ←→  min. / max. [s]	0,21 / 0,32	0,21 / 0,32

Order no.	▶ Technical data - NC mode	
	GEP5010IL-00-A	GEP5010IO-00-A
Gripping force → ← min. / max. [N]	980 / 1520	980 / 1520
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,21 / 0,32	0,21 / 0,32
Travel time  ←→  min. / max. [s]	0,16	0,16

Order no.	▶ Technical data - NO mode	
	GEP5010IL-00-A	GEP5010IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	980 / 1520	980 / 1520
Travel time → ← min. / max. [s]	0,16	0,16
Travel time  ←→  min. / max. [s]	0,21 / 0,32	0,21 / 0,32

## TECHNICAL DRAWINGS

- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

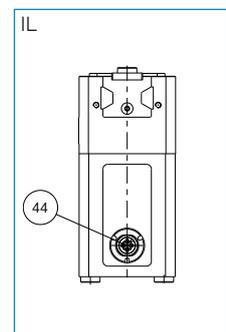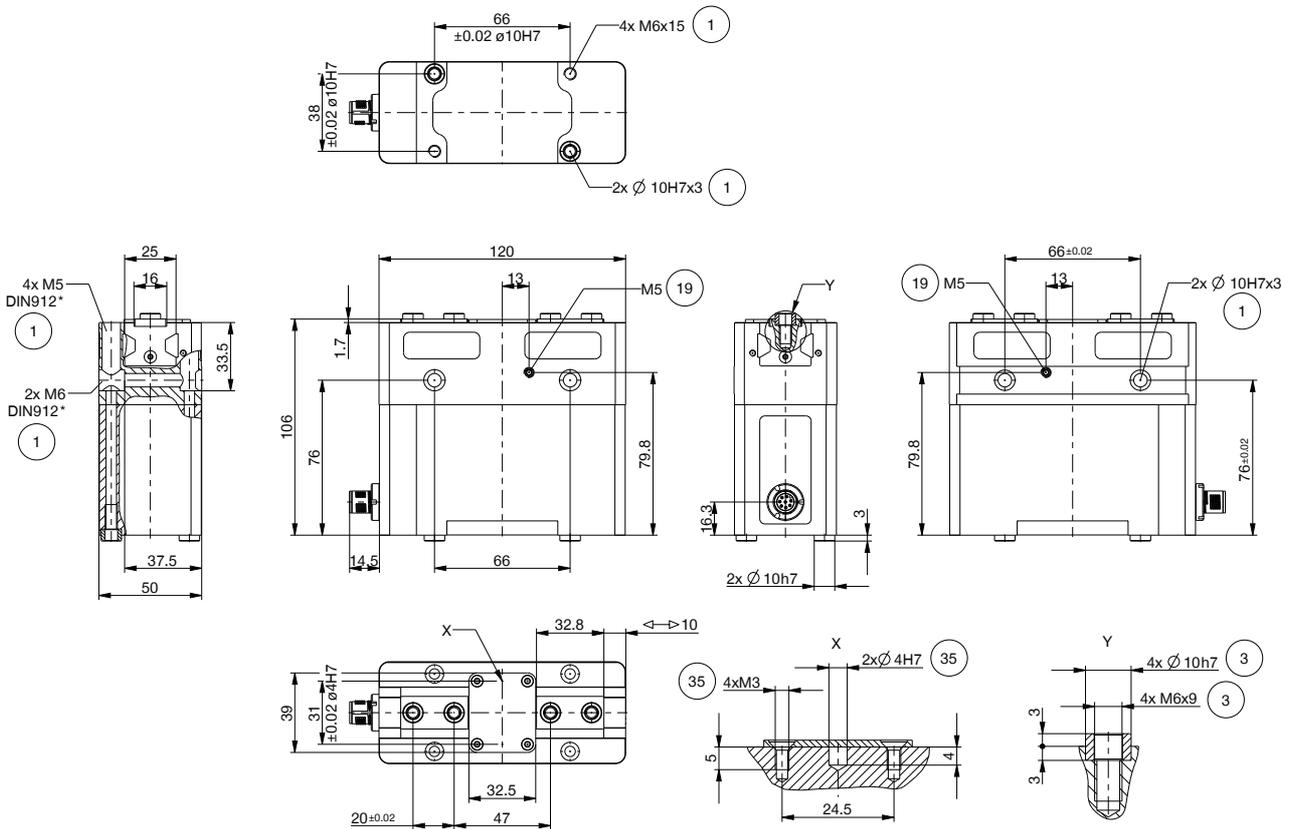

# 2-JAW PARALLEL GRIPPERS

## INSTALLATION SIZE GEP5010

### ▶ ACCESORIES




### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187

### ▶ INFRASTRUCTURE IO-LINK

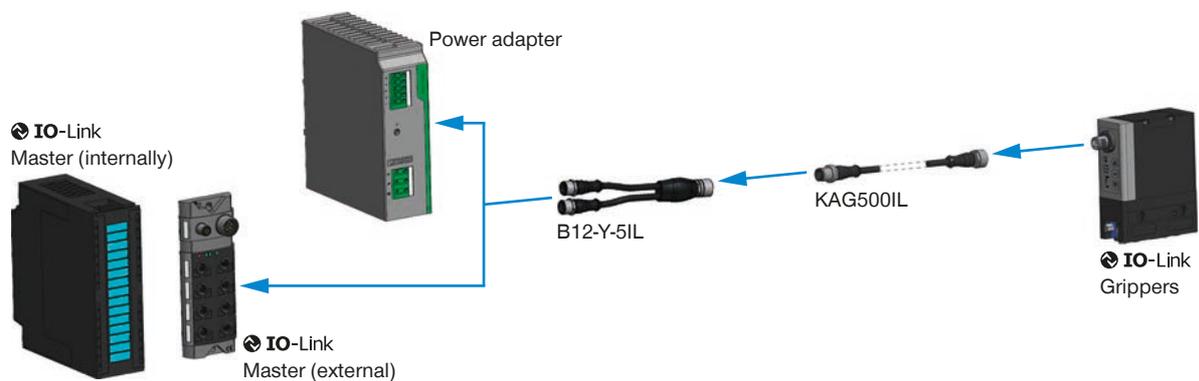

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part

## ▶ RECOMMENDED ACCESSORY GEP5010IL-00-A



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

## ▶ RECOMMENDED ACCESSORY GEP5010IO-00-A



### CONNECTIONS / OTHER



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12




**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# SECURED CONFIGURATION EXAMPLES

## GEP5000 / GED5000 SERIES


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (BECKHOFF)

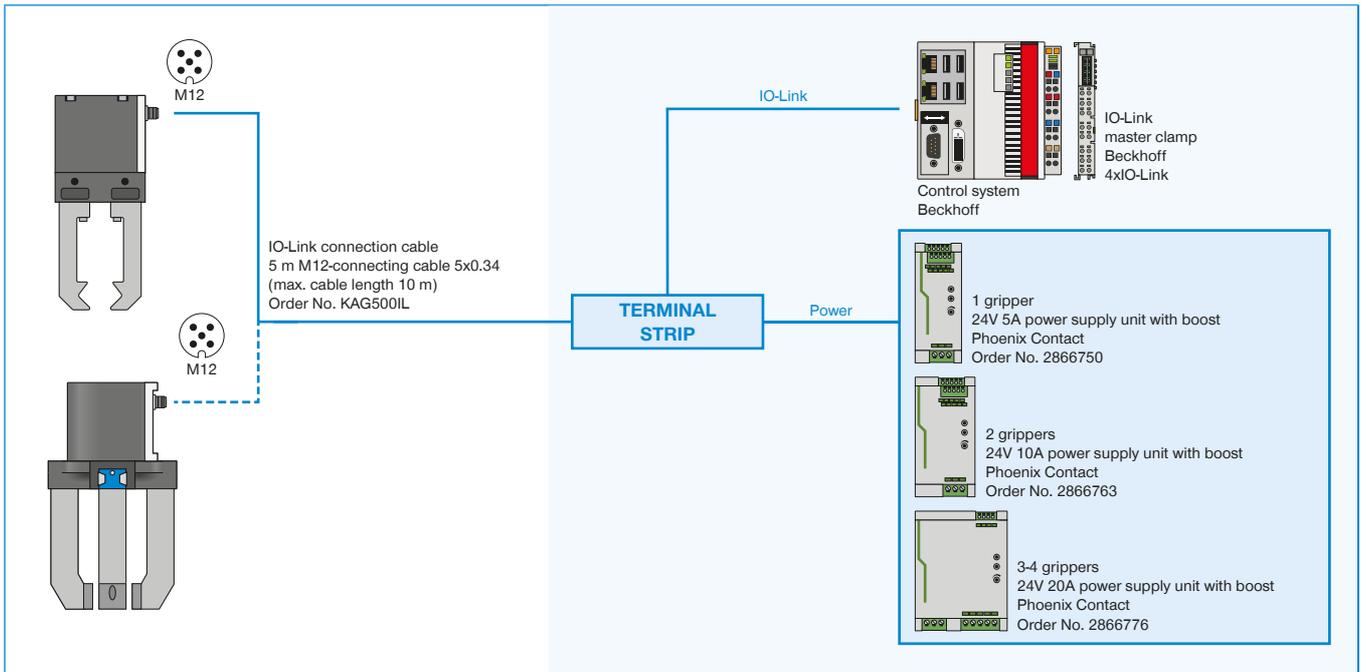


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (SIEMENS)

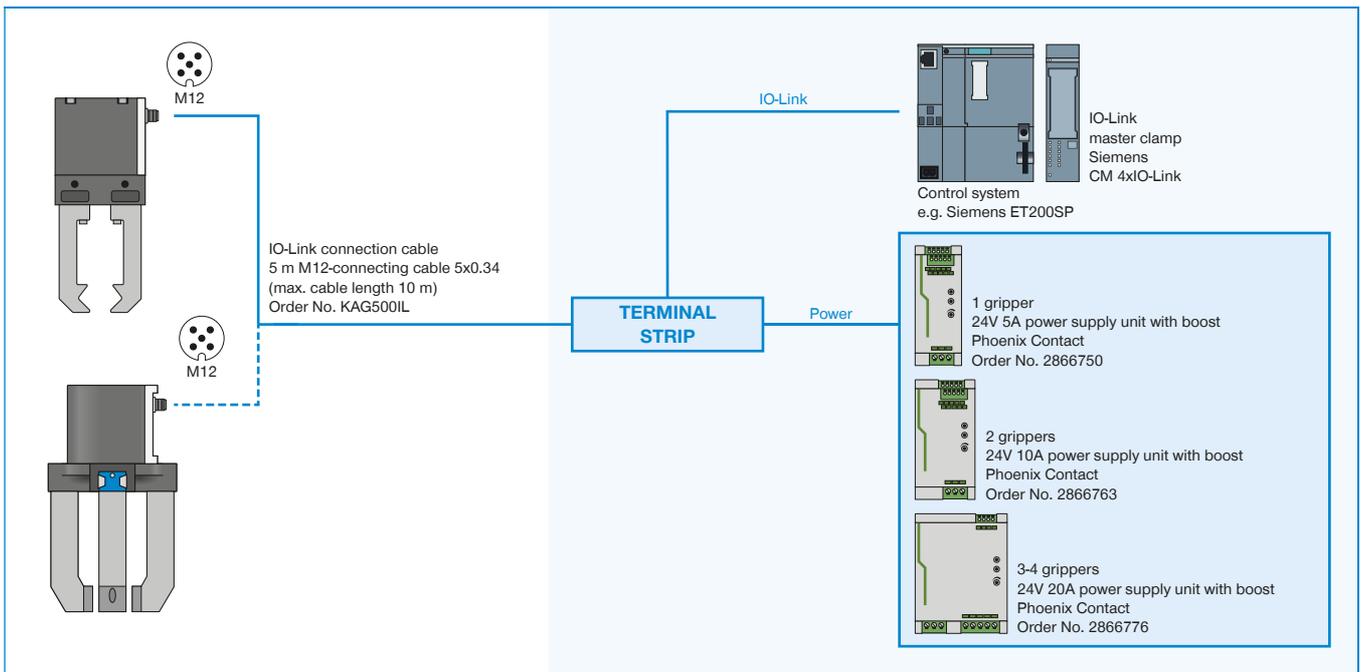

► GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

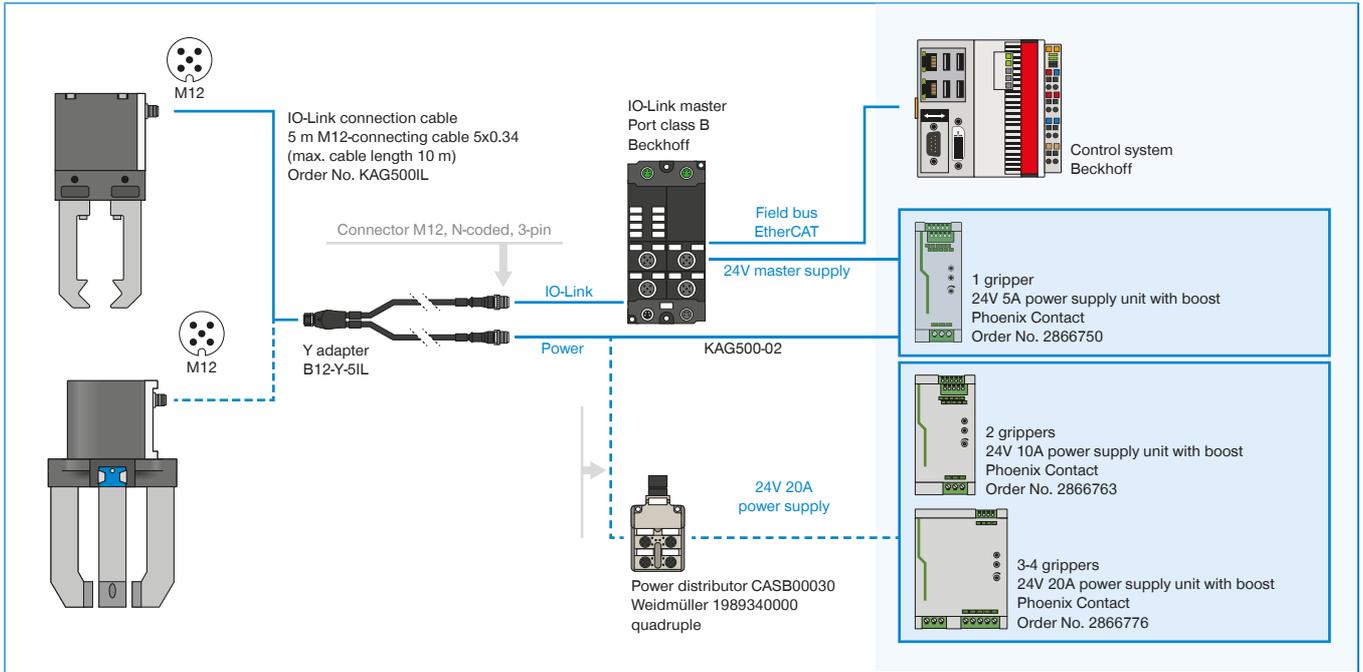


► GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

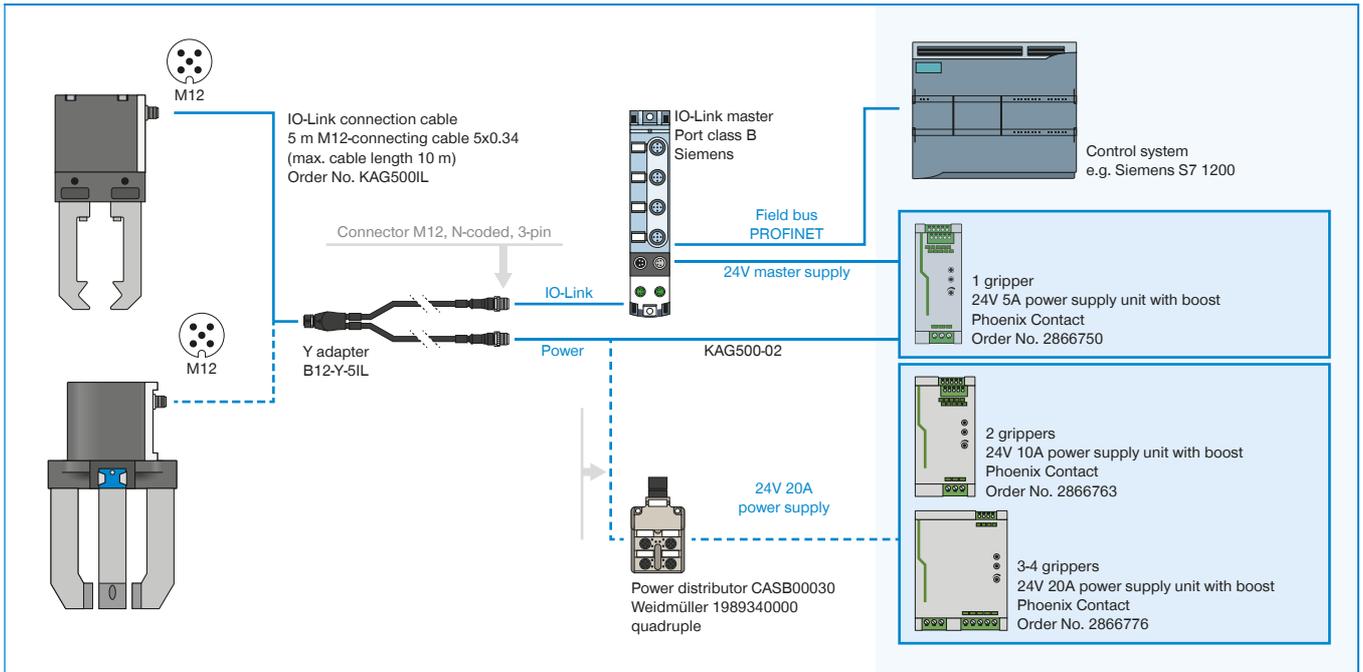

# SECURED CONFIGURATION EXAMPLES

## GEP5000 / GED5000 SERIES

### ▶ GEP5000 / GED5000 (DIGITAL IO) WIRING TO CONTROL CABINET

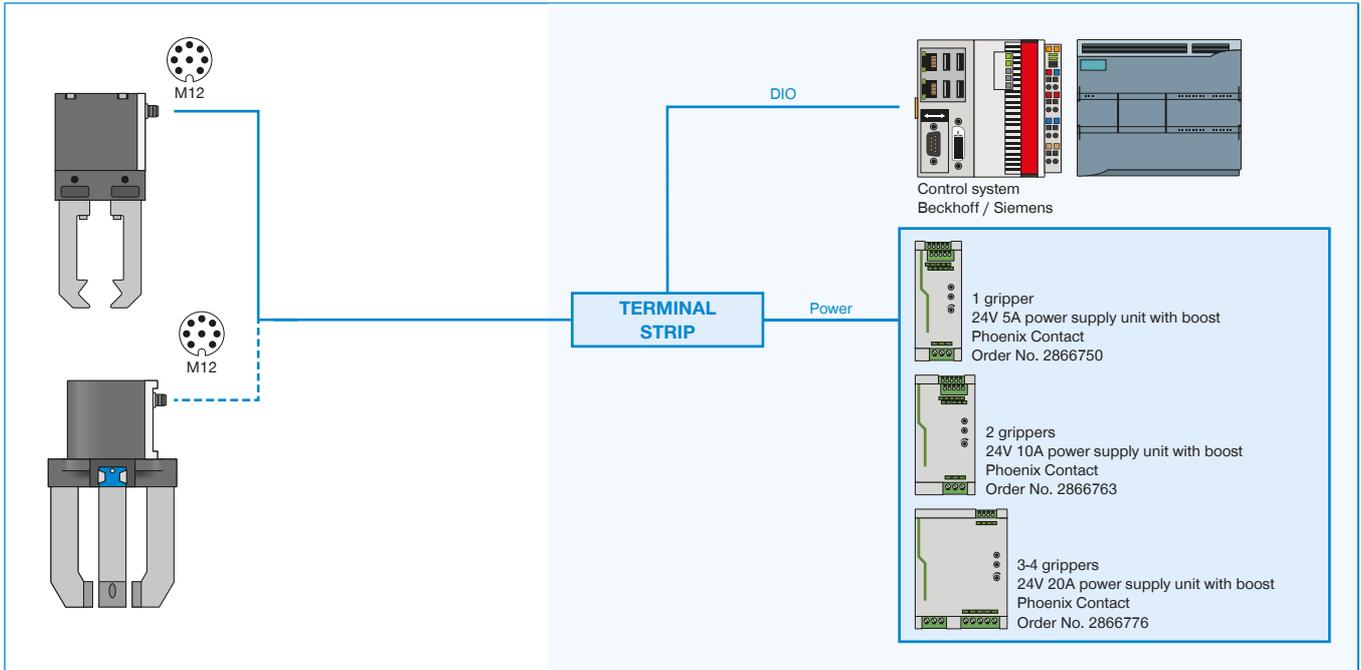




# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000

### ▶ PRODUCT ADVANTAGES

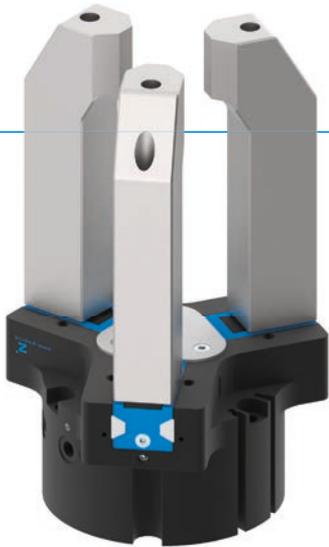

#### “The best”

##### ▶ Steel Linear Guide – The superior guidance system concept

The steel / steel guide stands for lasting precision, durability and a long service life—featuring maintenance intervals of up to 30 million gripping cycles. Benefit from these features and increase the profitability and process reliability of your machine.


##### ▶ Leakproof and corrosion protected – The universal gripper

Suitable for virtually all ambient conditions, with a sealed guide up to IP67 and corrosion protection as standard, you are able to use this gripper universally. As a result, the range of models in your production is reduced, along with a reduction in associated storage and process costs.

##### ▶ Aluminum Linear Guide – The alternative

Reduced to those aspects which are the most important, the steel / aluminum guide variant offers significantly better performance when compared to a similar gripper with a T-groove travel guide, and is on par with the best principles of toothed guidance systems.

### ▶ BENEFITS IN DETAIL

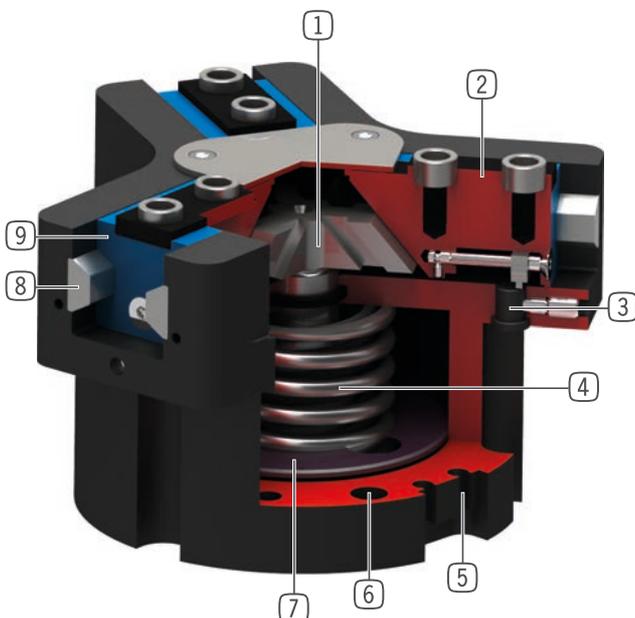

#### ① Wedge hook mechanism

- high forces and moments capacity
- Synchronized gripper jaw movement

#### ② Gripper jaw

- Gripper fingers mounted using removable centering sleeves
- Lubricated for life via incorporated lubrication slots

#### ③ Mounting block

- mounting for inductive proximity switch

#### ④ Integrated gripping force safety device

- Spring built into cylinder chamber as an energy store

#### ⑤ Sensing slot

- mounting and positioning of magnetic field sensors

#### ⑥ Mounting and positioning

- Alternatively, on several sides for customized mounting
- Pneumatic and electrical versions identical apart from height

#### ⑦ Drive

- Double-acting pneumatic rotor cylinder

#### ⑧ Steel Linear Guide

- Steel in steel guide
- Enables use of extremely long gripper fingers
- Also available in steel / aluminum variant

#### ⑨ Dual lip seal

- IP64 and up to IP67 (with purged air) for Protector version
- Prevents grease from being squeezed out, increasing service life



## ► SERIES CHARACTERISTICS

Installation size		Variants				
GPD50XX		-00	-20	-21	-24	-AL
N	Long stroke	●	●	●	●	●
NC	Long stroke / Spring closing	●	●	●	●	●
NO	Long stroke / Spring opening	●	●	●	●	●
S	High-strength	●	●	●	●	
SC	High-strength / Spring closing	●	●	●	●	
SO	High-strength / Spring opening	●	●	●	●	
	Steel / steel guide	●	●	●	●	
	Steel / aluminum guide					●
	15 million maintenance-free cycles (max.)					●
	30 million maintenance-free cycles (max.)	●	●	●	●	
	Inductive sensor	●	●	●	●	
	Magnetic field sensor	●	●	●	●	●
	Protected against corrosion	●	●	●	●	
	Purged air	●	●	●	●	●
	Temperature-resistant		●		●	
	IP40					●
	IP64	●	●			
	IP67*			●	●	

\*with purged air (max. 0,5 bar)

## ► TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GPD5003	2,5	310 - 465	0,14 - 0,22	IP40 / IP64 / IP67*
GPD5004	2 - 4	460 - 1520	0,27 - 0,41	IP40 / IP64 / IP67*
GPD5006	3 - 6	740 - 2370	0,48 - 0,58	IP40 / IP64 / IP67*
GPD5008	4 - 8	1260 - 3910	0,83 - 1	IP40 / IP64 / IP67*
GPD5010	5 - 10	2290 - 7160	1,45 - 1,9	IP40 / IP64 / IP67*
GPD5013	6 - 13	3770 - 11450	2,6 - 3,7	IP64 / IP67*
GPD5016	8 - 16	6870 - 20330	5,7 - 7,5	IP64 / IP67*
GPD5025	14 - 25	8430 - 22850	11,8 - 15,4	IP64 / IP67*
GPD5030	17 - 30	12130 - 32400	21 - 27,5	IP64 / IP67*
GPD5035	20 - 35	16600 - 45200	37,8 - 42	IP64 / IP67*
GPD5045	26 - 45	27900 - 72500	78,6 - 99,9	IP64 / IP67*


\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000 FUNCTIONAL DESCRIPTION




### GRIPPING COMPONENTS

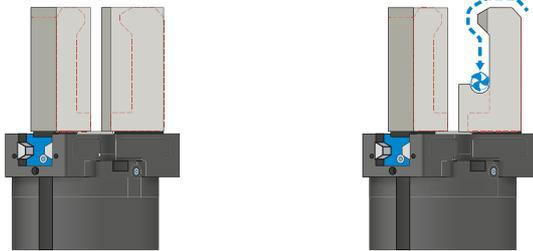

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

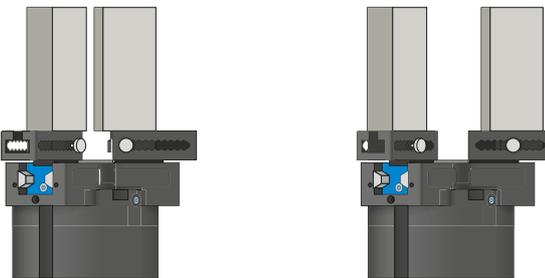

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

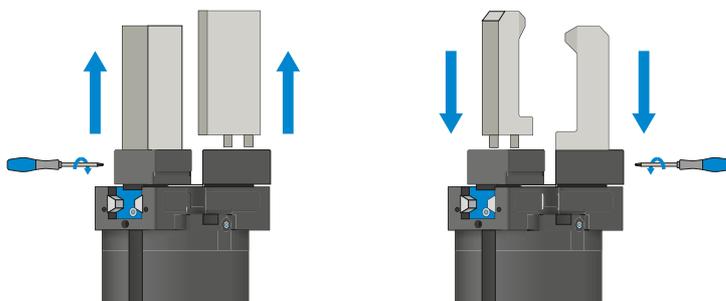

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.



## GRIPPING COMPONENTS

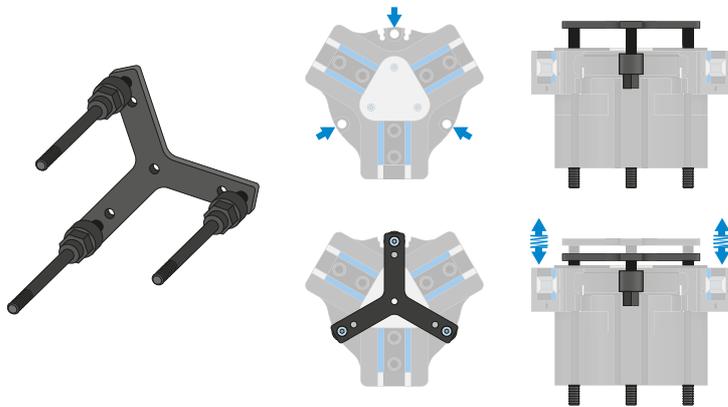


### Pressure piece – ADS5000

When the gripper fingers are open, the pressure piece is used for spring-supported positioning of the workpiece against a limit stop. This greatly reduces the loads on the gripper that arise during joining.



## ENERGY SUPPLY

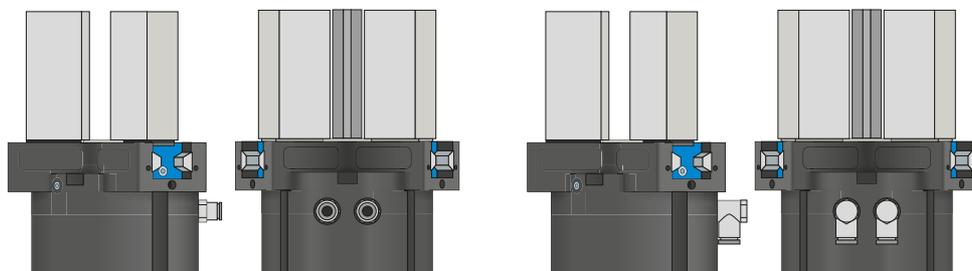

### Pneumatic threaded connections


Available in straight and angled design. Can be chosen freely depending on the space conditions or installation situation.

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000 FUNCTIONAL DESCRIPTION



### ENERGY SUPPLY

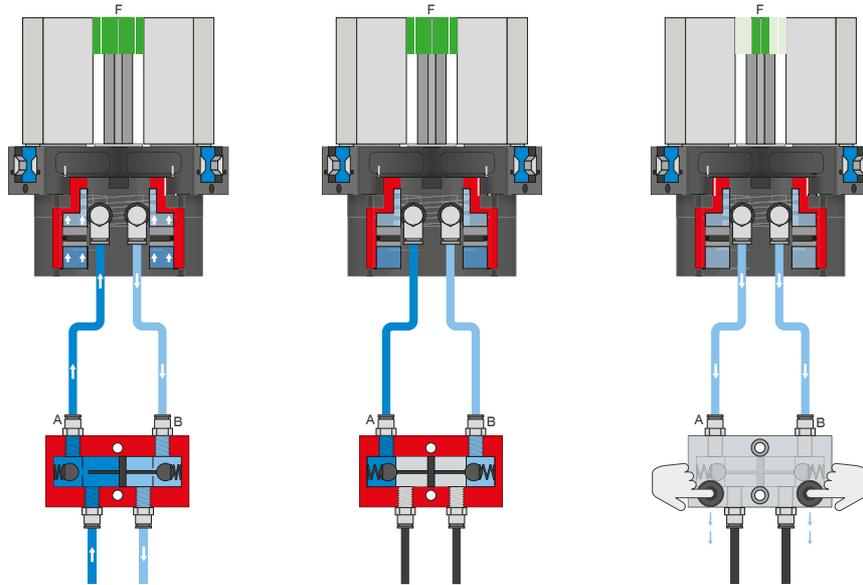


4

#### Pressure safety valve – DSV

Ensures safe retention of force and position if the system pressure drops

The integrated double check valve, which can be unlocked, retains the system pressure of the gripper in case of EMERGENCY STOP. To ensure the function, the valve must be installed as close to the gripper's air connection as possible. In variant E, two pushbuttons are installed that allow for controlled bleeding of the gripper.

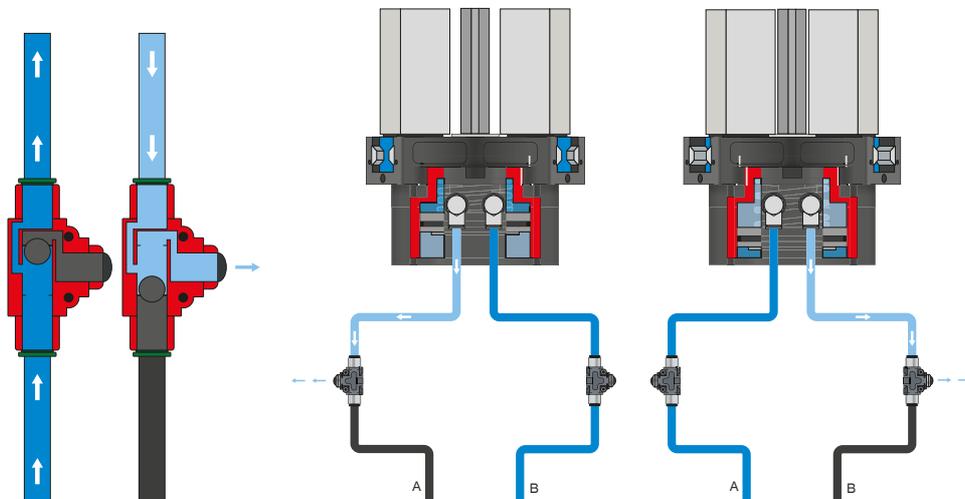


#### Quick exhaust valve – DEV

For rapid bleeding of the compressed air and preventing back pressure

The inline valves make a faster cycle time possible and prevent the formation of condensate in grippers with a small cylinder volume. To ensure the function, the valve must be installed as close to the gripper's air connection as possible.



## SENSORS

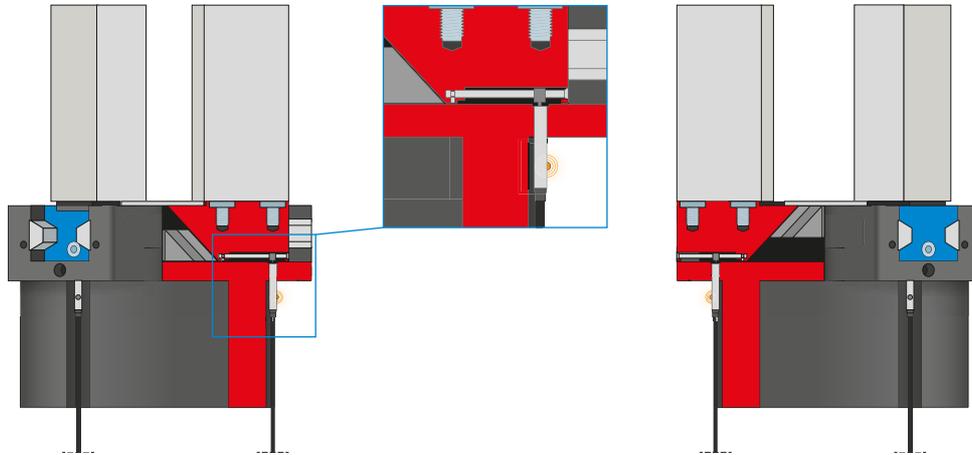


### Inductive sensors – NJ\*

#### For direct position sensing of the gripper jaws

The sensor is guided into the intake as far as it will go and fixed in place using the lateral clamping screw. Tuning to the desired position then takes place by adjusting the cam switch. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector, as well as with direct plug orientation.

\*Not for variant AL-A

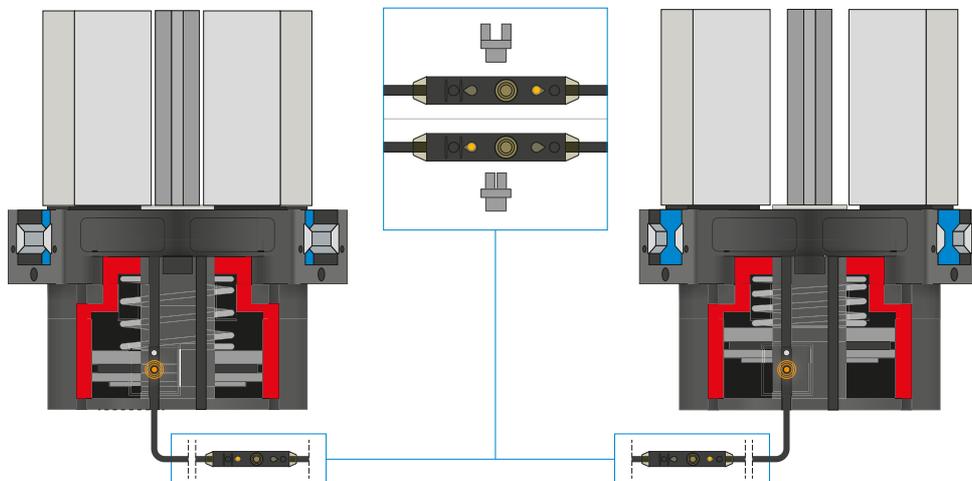

### 2-point magnetic field sensors – MFS

#### With two freely programmable switching points

Using the programming unit integrated in the cable, two switch points can be freely defined for this sensor. To do so, the sensor is clamped in the C-groove, the gripper approaches position one and the position is taught in using the teach button. Afterwards, the second position is approached with the gripper and programmed. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.


# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000 FUNCTIONAL DESCRIPTION




### SENSORS

MFS02

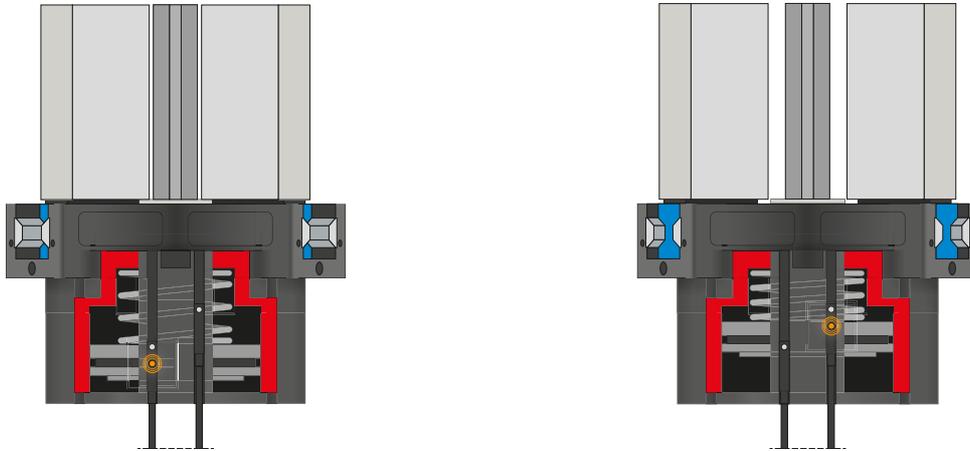

MFS01

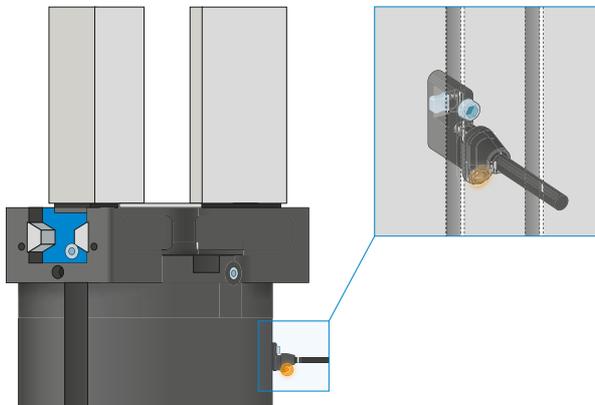


### 1-point magnetic field sensors – MFS

#### For non-contact sensing of the piston position

These sensors are installed in the C-groove of the gripper and detect the magnet attached to the piston of the gripper. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The variants are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.




## CONNECTIONS / OTHER

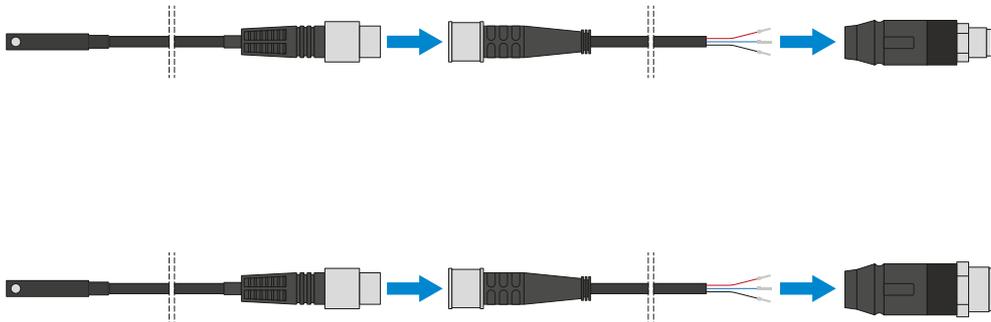

### Plug-in connectors

#### For extending and fabricating the connection lines for the sensors

Cables with a length of 5 m with exposed leads are available. Depending on the specific needs, the cables can be shortened or fabricated with connectors in sizes M8 and M12.

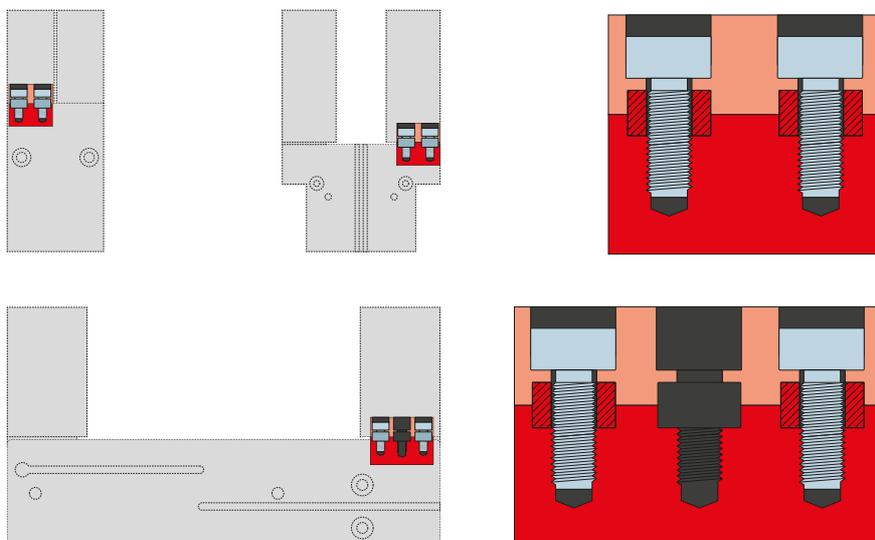

### Centering sleeves

#### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.

# 3-JAW CONCENTRIC GRIPPERS


## INSTALLATION SIZE GPD5003

### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### ▶ Gripping force diagram

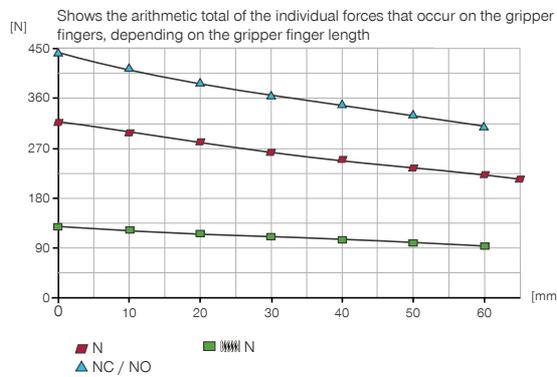

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	7
Mx [Nm]	14
My [Nm]	13
Fa [N]	550

-AL-A

Steel / aluminum guide

#### ▶ Gripping force diagram

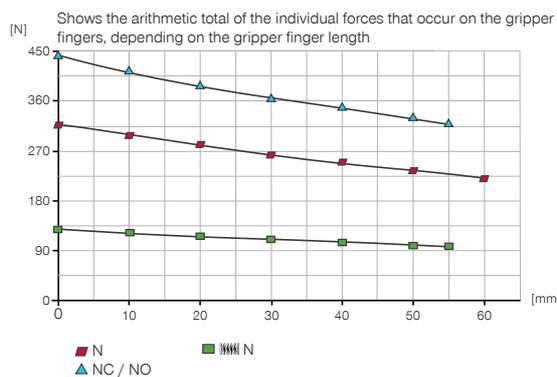

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	6
Mx [Nm]	12
My [Nm]	12
Fa [N]	500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ► TECHNICAL DATA

Order no.	► Technical data		
	GPD5003N-00-A	GPD5003NC-00-A	GPD5003NO-00-A
Stroke per jaw [mm]	2.5	2.5	2.5
Gripping force in closing [N]	310	440	
Gripping force in opening [N]	335		465
Gripping force secured by spring min. [N]		130	130
Closing time [s]	0.015	0.01	0.02
Opening time [s]	0.015	0.02	0.01
Permissible weight per jaw max [kg]	0.12	0.12	0.12
Length of the gripper fingers max. [mm]	65	60	60
Repetition accuracy +/- [mm]	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4
Operating pressure max. [bar]	8	7	7
Nominal operating pressure [bar]	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	4.2	9.5	9.5
Protection to IEC 60529	IP64	IP64	IP64
Weight [kg]	0.14	0.18	0.18

Order no.	► Technical Data - High Temperature Version		
	GPD5003N-20-A	GPD5003NC-20-A	GPD5003NO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version		
	GPD5003N-21-A	GPD5003NC-21-A	GPD5003NO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*
Weight [kg]	0.18	0.22	0.22

Order no.	► Technical Data - High Temperature Protector Version		
	GPD5003N-24-A	GPD5003NC-24-A	GPD5003NO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*
Weight [kg]	0.18	0.22	0.22

\*with purged air (max. 0,5 bar)








Order no.	► Technical data		
	GPD5003N-AL-A	GPD5003NC-AL-A	GPD5003NO-AL-A
Permissible weight per jaw max [kg]	0.1	0.1	0.1
Length of the gripper fingers max. [mm]	60	55	55
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.14	0.17	0.17

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5003


### TECHNICAL DRAWINGS

NC / NO  
-00-A / -20-A / -AL-A

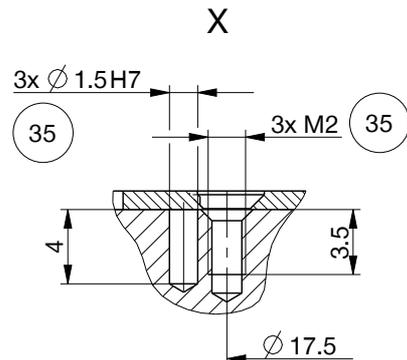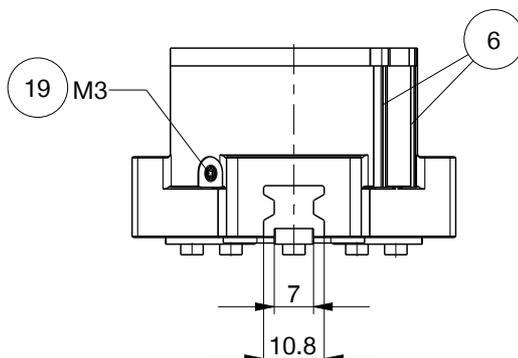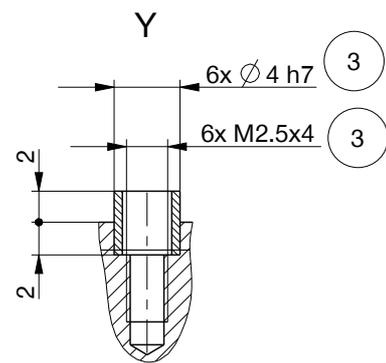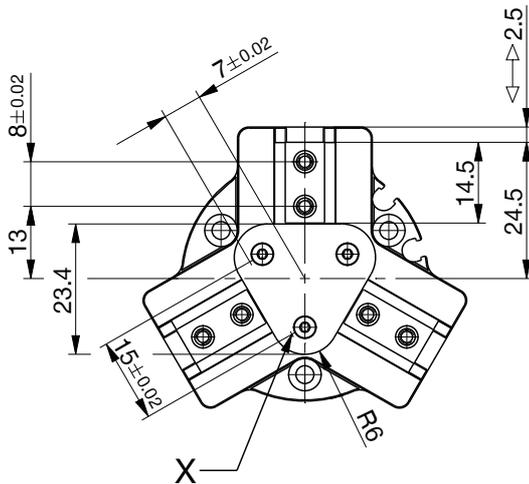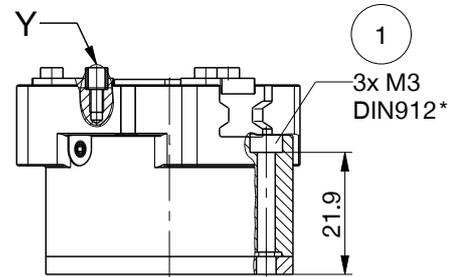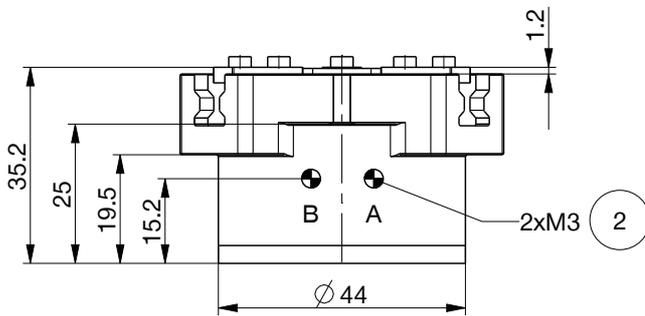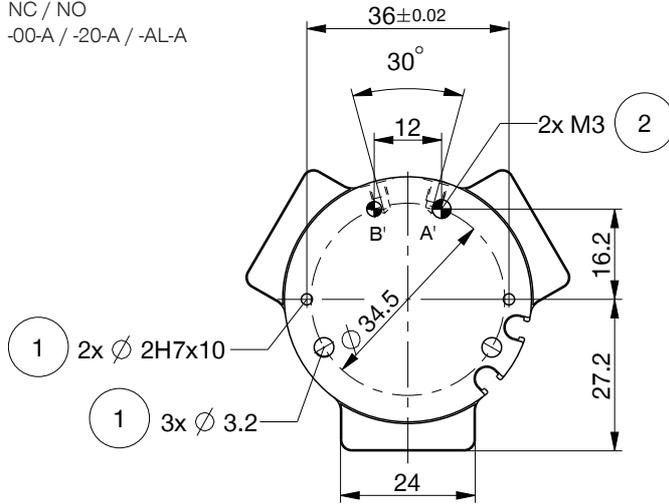


## TECHNICAL DRAWINGS


N  
-00-A / -20-A / -AL-A

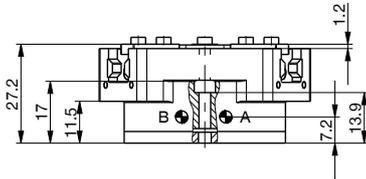

N / NC / NO  
-21-A / -24-A

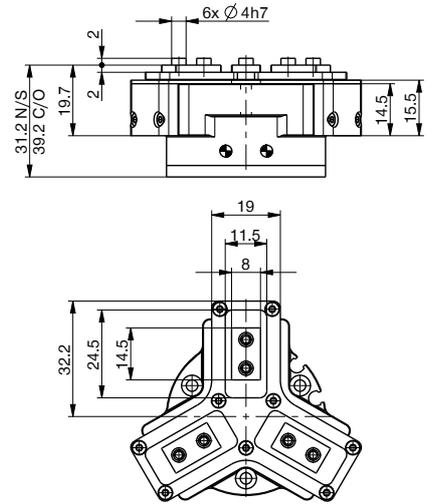

Hoseless air feed-through M3

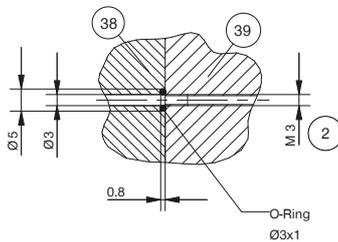


- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | Ⓐ Air connection (close)              |
| ② Energy supply                                    | Ⓑ Air connection (open)               |
| ③ Fixing for gripper finger                        | Ⓐ Air connection, alternative (close) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓑ Air connection, alternative (open)  |
| ⑱ Air purge connection option (max. 0,5 bar)       |                                       |
| ⑳ Attachment option for customer-specific fittings |                                       |
| ㉘ Adapter  |                                       |
| ㉙ Gripper  |                                       |

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5003

### ▶ ACCESORIES

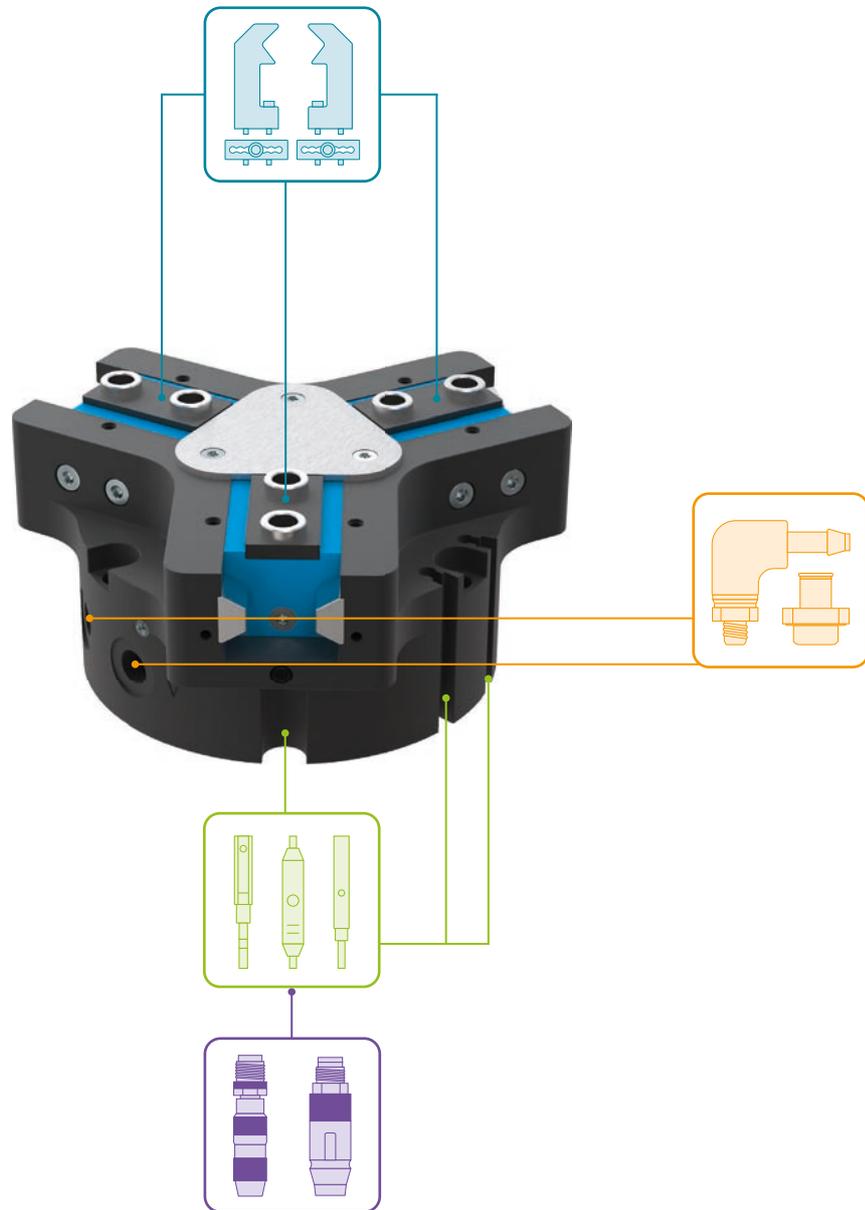

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

**DST06510**

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5003AL**  
Universal jaw aluminium



**UB5003ST**  
Universal jaw steel



**KF50N**  
Rubber Coated Tape  
Knobbed



**EB5003AL**  
Aluminum adjustment jaw



**EB5003ST**  
Steel adjustment jaw



**ADS5003-01**  
Pressure piece N / S



**ADS5003-02**  
Pressure piece NC / NO  
/ SC / SO



### ENERGY SUPPLY



**GVM3**  
Straight Fittings - Barb  
Style Connection



**WVM3**  
Angled Fittings - Barb  
Style Connection



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with  
quick exhaust



### SENSORS



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Ca-  
ble 5m - Socket M8 (female)



**S12-G-3**  
Plug-in connector customiz-  
able Straight - Connector M12

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5004


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

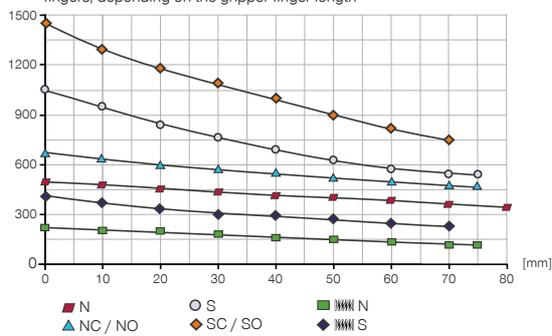

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

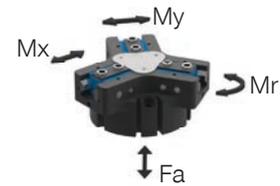


Mr [Nm]	14
Mx [Nm]	29
My [Nm]	23
Fa [N]	750

-AL-A

Steel / aluminum guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

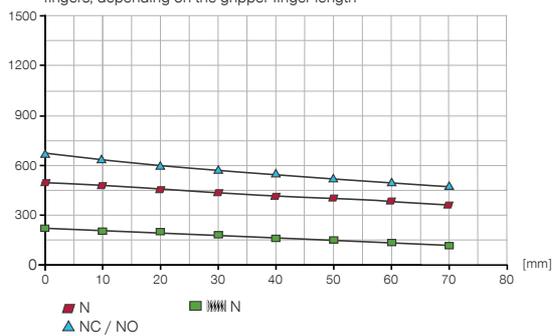

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	10
Mx [Nm]	25
My [Nm]	20
Fa [N]	700

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPD5004N-00-A	GPD5004NC-00-A	GPD5004NO-00-A	GPD5004S-00-A	GPD5004SC-00-A	GPD5004SO-00-A
Stroke per jaw [mm]	4	4	4	2	2	2
Gripping force in closing [N]	460	650		1010	1430	
Gripping force in opening [N]	500		690	1100		1520
Gripping force secured by spring min. [N]		190	190		420	420
Closing time [s]	0.025	0.018	0.028	0.025	0.018	0.028
Opening time [s]	0.025	0.028	0.018	0.025	0.028	0.018
Permissible weight per jaw max [kg]	0.2	0.2	0.2	0.2	0.2	0.2
Length of the gripper fingers max. [mm]	80	75	75	75	70	70
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	11	21	21	11	21	21
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.27	0.33	0.33	0.27	0.33	0.33

Order no.	▶ Technical Data - High Temperature Version					
	GPD5004N-20-A	GPD5004NC-20-A	GPD5004NO-20-A	GPD5004S-20-A	GPD5004SC-20-A	GPD5004SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPD5004N-21-A	GPD5004NC-21-A	GPD5004NO-21-A	GPD5004S-21-A	GPD5004SC-21-A	GPD5004SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.35	0.41	0.41	0.35	0.41	0.41

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPD5004N-24-A	GPD5004NC-24-A	GPD5004NO-24-A	GPD5004S-24-A	GPD5004SC-24-A	GPD5004SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.35	0.41	0.41	0.35	0.41	0.41

\*with purged air (max. 0,5 bar)








Order no.	▶ Technical data		
	GPD5004N-AL-A	GPD5004NC-AL-A	GPD5004NO-AL-A
Permissible weight per jaw max [kg]	0.18	0.18	0.18
Length of the gripper fingers max. [mm]	70	70	70
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.27	0.32	0.32

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5004


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

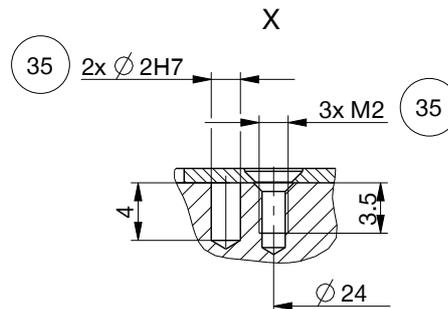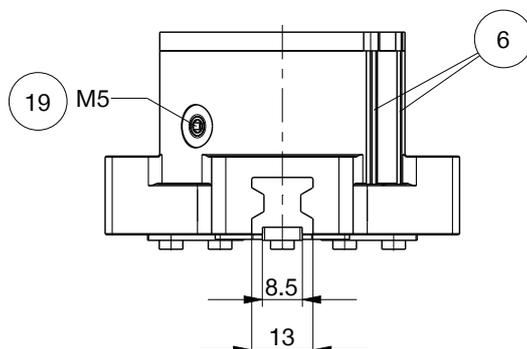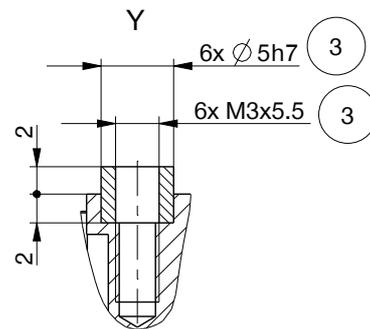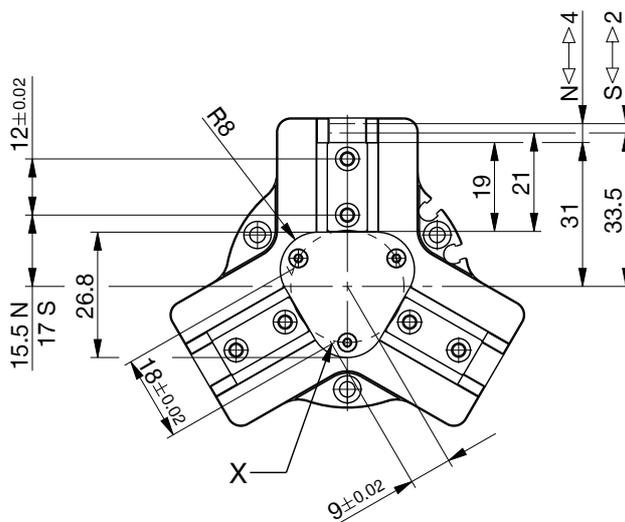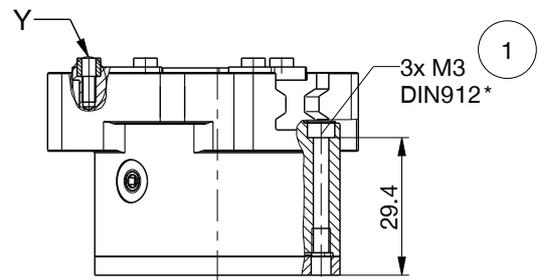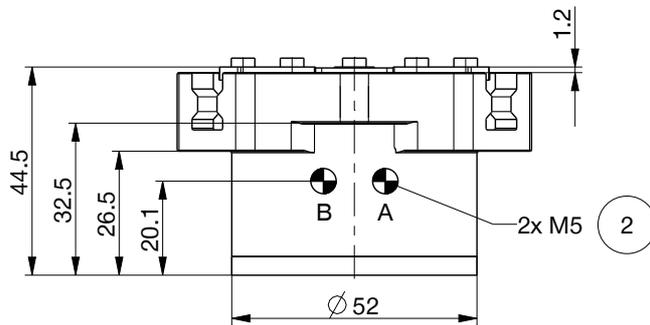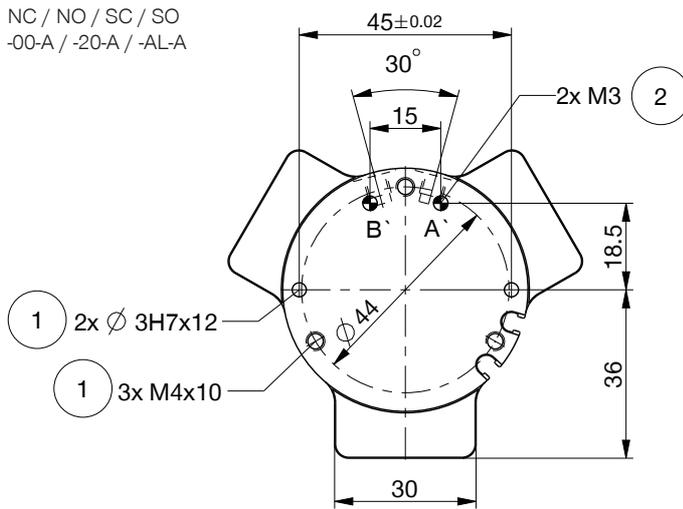


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

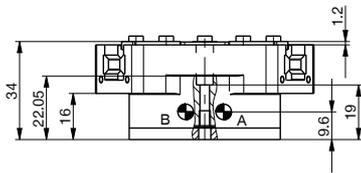

N / NC / NO / S / SC / SO  
-21-A / -24-A

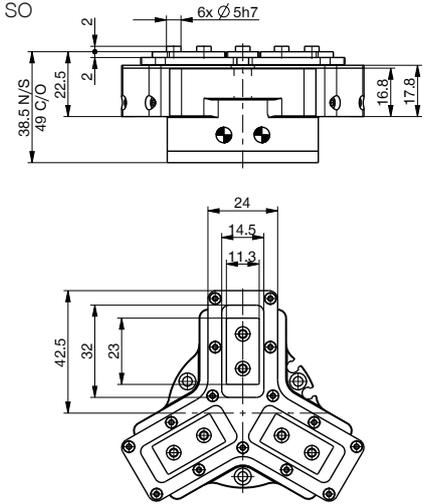

Hoseless air feed-through M3

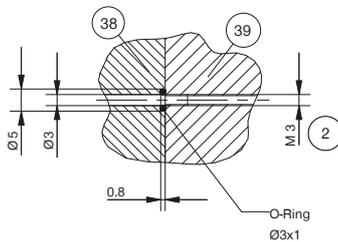


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑥ Integrated slot for magnetic field sensor
- ⑱ Air purge connection option (max. 0,5 bar)
- ⑳ Attachment option for customer-specific fittings
- ㉘ Adapter
- ㉙ Gripper
- Ⓐ Air connection (close)
- Ⓑ Air connection (open)
- Ⓐ Air connection, alternative (close)
- Ⓑ Air connection, alternative (open)



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5004

### ▶ ACCESORIES

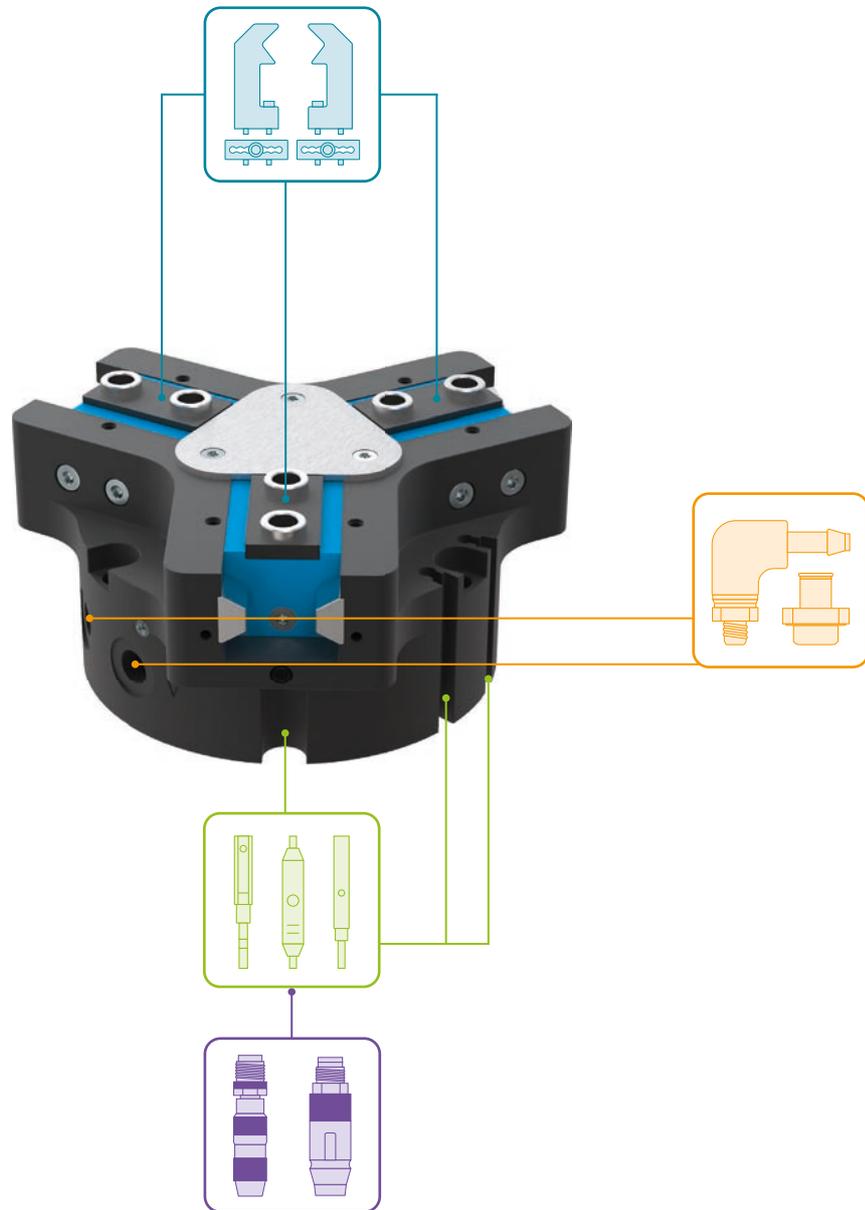

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

015761

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5004AL**  
Universal jaw aluminium



**UB5004ST**  
Universal jaw steel



**EB5004AL**  
Aluminum adjustment jaw



**EB5004ST**  
Steel adjustment jaw



**WB5004L**  
Changeable jaw, loose-part-set



**WB5004F**  
Changeable jaw, fix-part



**ADS5004-01**  
Pressure piece N / S



**ADS5004-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5006


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

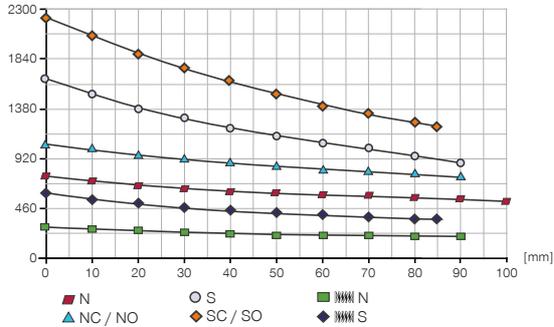

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250

-AL-A

Steel / aluminum guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

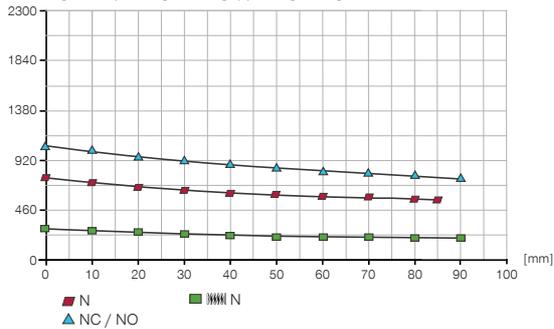

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	40
Mx [Nm]	60
My [Nm]	45
Fa [N]	1200

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPD5006N-00-A	GPD5006NC-00-A	GPD5006NO-00-A	GPD5006S-00-A	GPD5006SC-00-A	GPD5006SO-00-A
Stroke per jaw [mm]	6	6	6	3	3	3
Gripping force in closing [N]	740	1020		1620	2240	
Gripping force in opening [N]	800		1080	1750		2370
Gripping force secured by spring min. [N]		280	280		620	620
Closing time [s]	0.028	0.018	0.038	0.028	0.018	0.038
Opening time [s]	0.028	0.038	0.018	0.028	0.038	0.018
Permissible weight per jaw max [kg]	0.4	0.4	0.4	0.4	0.4	0.4
Length of the gripper fingers max. [mm]	100	90	90	90	85	85
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	22	43	43	22	43	43
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.48	0.58	0.58	0.48	0.58	0.58

Order no.	▶ Technical Data - High Temperature Version					
	GPD5006N-20-A	GPD5006NC-20-A	GPD5006NO-20-A	GPD5006S-20-A	GPD5006SC-20-A	GPD5006SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPD5006N-21-A	GPD5006NC-21-A	GPD5006NO-21-A	GPD5006S-21-A	GPD5006SC-21-A	GPD5006SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.61	0.71	0.71	0.61	0.71	0.71

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPD5006N-24-A	GPD5006NC-24-A	GPD5006NO-24-A	GPD5006S-24-A	GPD5006SC-24-A	GPD5006SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	0.61	0.71	0.71	0.61	0.71	0.71

\*with purged air (max. 0,5 bar)








Order no.	▶ Technical data		
	GPD5006N-AL-A	GPD5006NC-AL-A	GPD5006NO-AL-A
Permissible weight per jaw max [kg]	0.35	0.35	0.35
Length of the gripper fingers max. [mm]	90	85	85
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.47	0.57	0.57

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5006


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

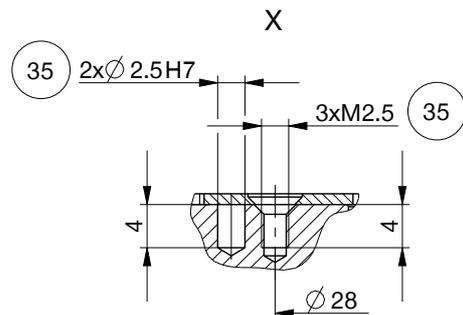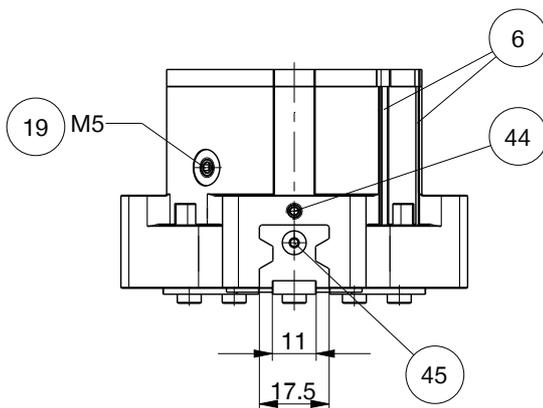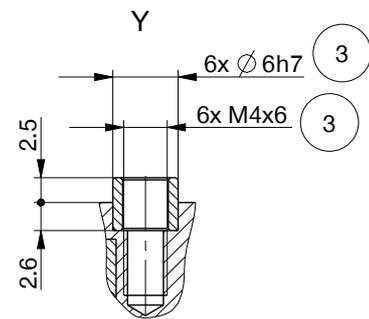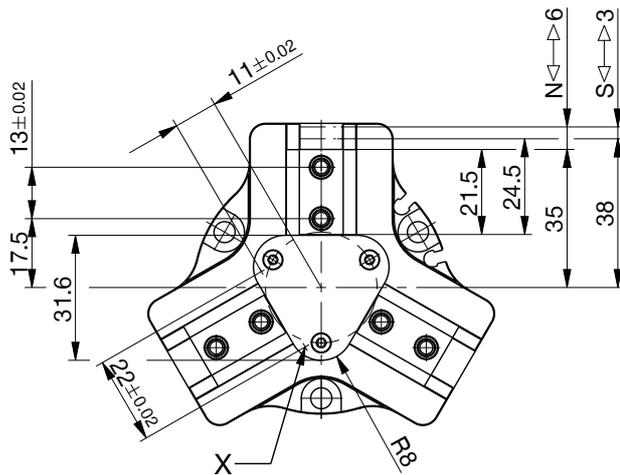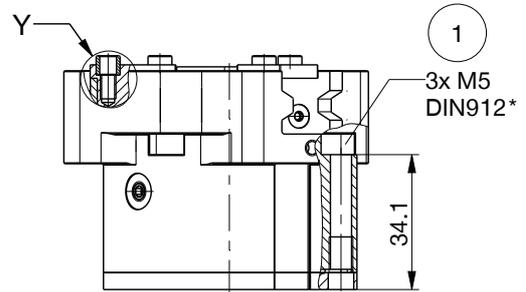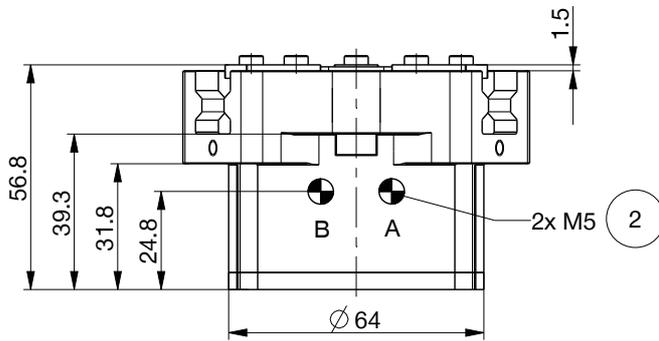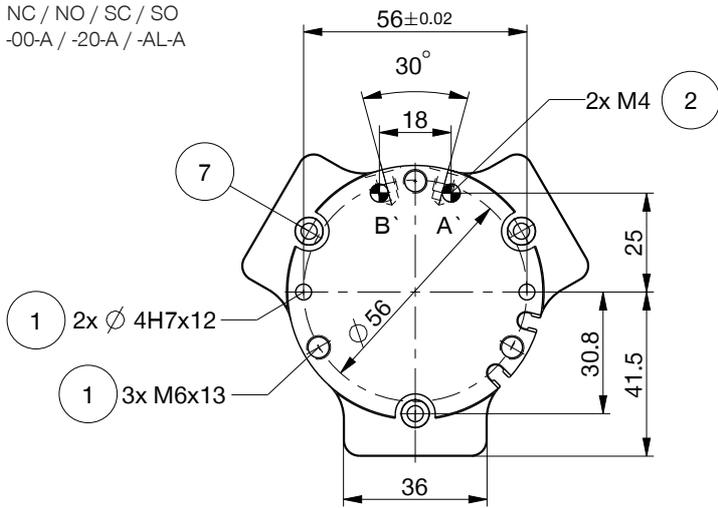


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

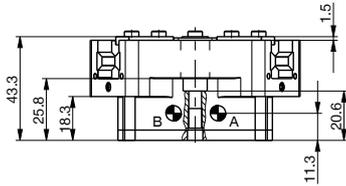

N / NC / NO / S / SC / SO  
-21-A / -24-A

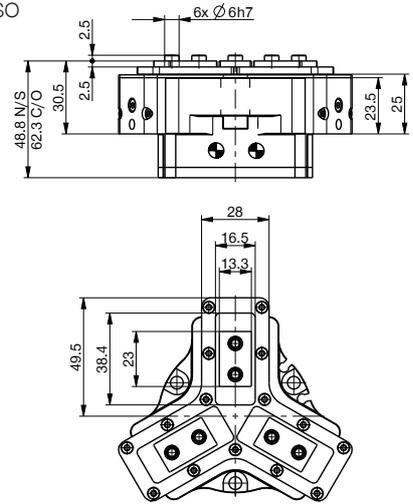

Hoseless air feed-through M4

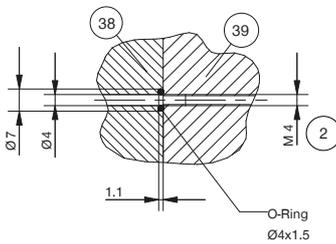


- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑦ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ㉓ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ㉔ Adapter  |  |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5006

### ▶ ACCESORIES

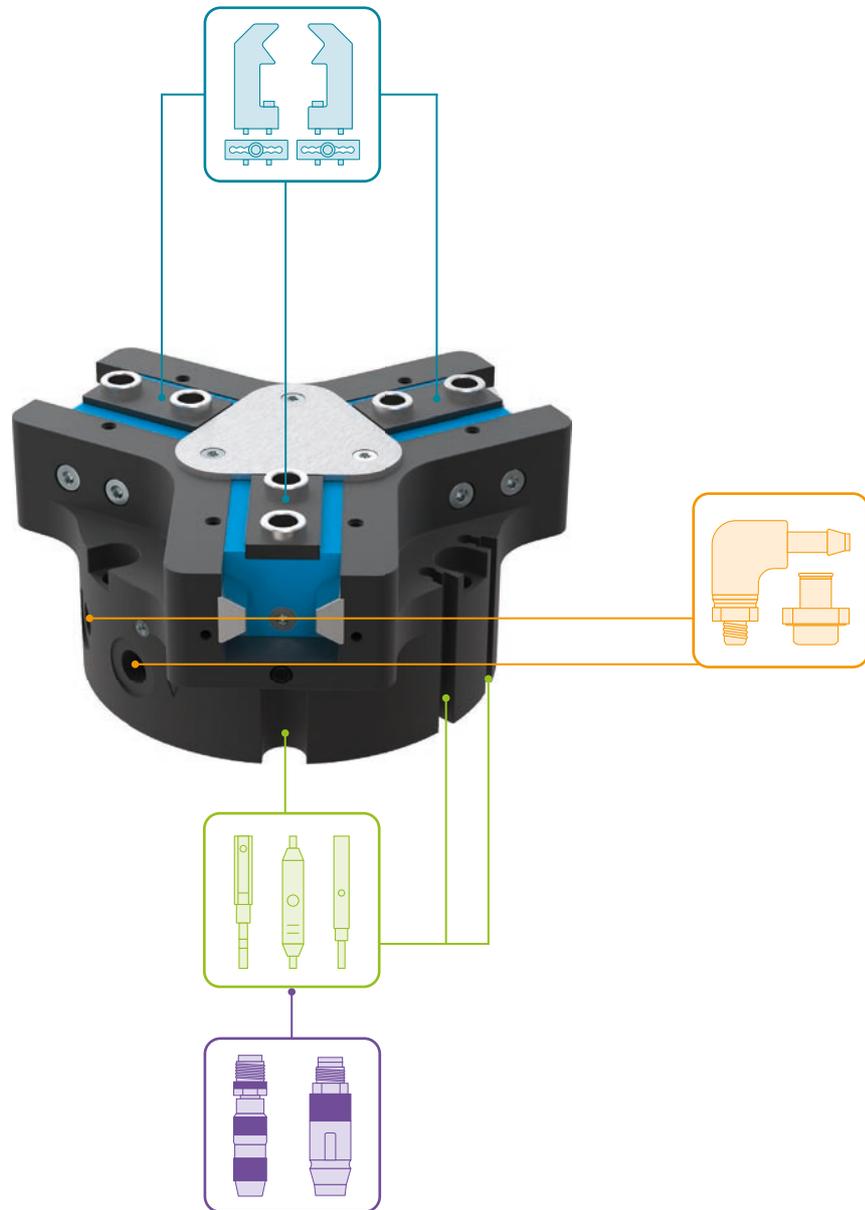

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024230

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part



**ADS5006-01**  
Pressure piece N / S



**ADS5006-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8

\*Not for variant AL-A



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

# 3-JAW CONCENTRIC GRIPPERS


## INSTALLATION SIZE GPD5008

### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### ▶ Gripping force diagram

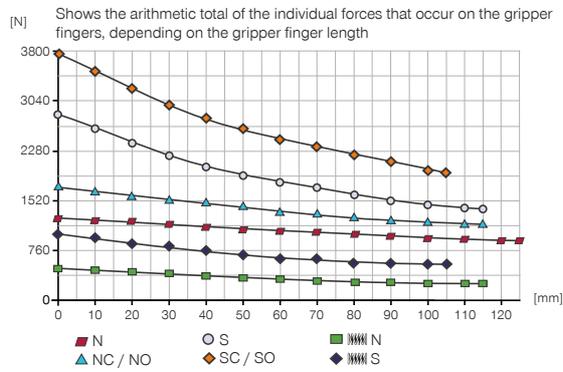

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

-AL-A

Steel / aluminum guide

#### ▶ Gripping force diagram

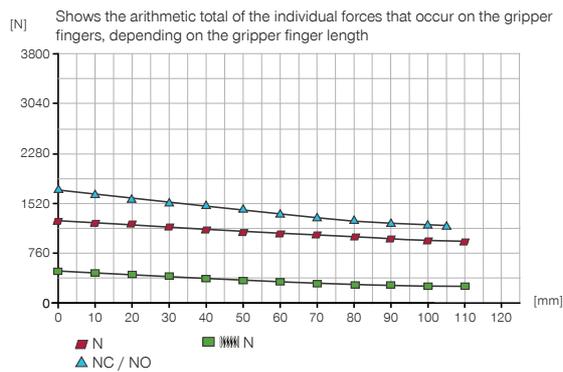

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	55
Mx [Nm]	95
My [Nm]	60
Fa [N]	1800

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5008N-00-A	GPD5008NC-00-A	GPD5008NO-00-A	GPD5008S-00-A	GPD5008SC-00-A	GPD5008SO-00-A
Stroke per jaw [mm]	8	8	8	4	4	4
Gripping force in closing [N]	1260	1690		2780	3730	
Gripping force in opening [N]	1340		1770	2960		3910
Gripping force secured by spring min. [N]		430	430		950	950
Closing time [s]	0.048	0.035	0.055	0.048	0.035	0.055
Opening time [s]	0.048	0.055	0.035	0.048	0.055	0.035
Permissible weight per jaw max [kg]	0.7	0.7	0.7	0.7	0.7	0.7
Length of the gripper fingers max. [mm]	125	115	115	115	105	105
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	51	90	90	51	90	90
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.83	1	1	0.83	1	1

Order no.	► Technical Data - High Temperature Version					
	GPD5008N-20-A	GPD5008NC-20-A	GPD5008NO-20-A	GPD5008S-20-A	GPD5008SC-20-A	GPD5008SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5008N-21-A	GPD5008NC-21-A	GPD5008NO-21-A	GPD5008S-21-A	GPD5008SC-21-A	GPD5008SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.03	1.2	1.2	1.03	1.2	1.2

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5008N-24-A	GPD5008NC-24-A	GPD5008NO-24-A	GPD5008S-24-A	GPD5008SC-24-A	GPD5008SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.03	1.2	1.2	1.03	1.2	1.2

\*with purged air (max. 0,5 bar)








Order no.	► Technical data		
	GPD5008N-AL-A	GPD5008NC-AL-A	GPD5008NO-AL-A
Permissible weight per jaw max [kg]	0.6	0.6	0.6
Length of the gripper fingers max. [mm]	110	105	105
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	0.83	1	1

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5008


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

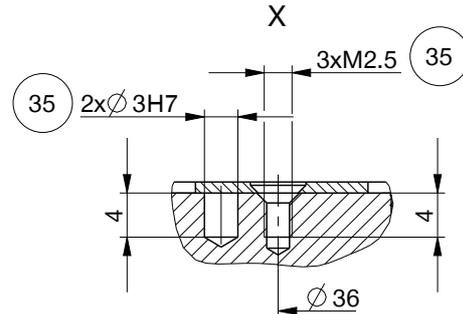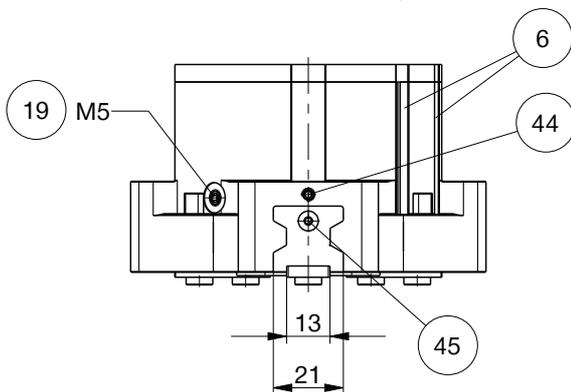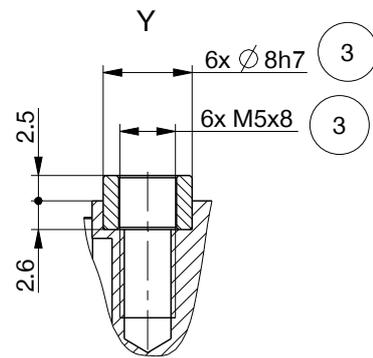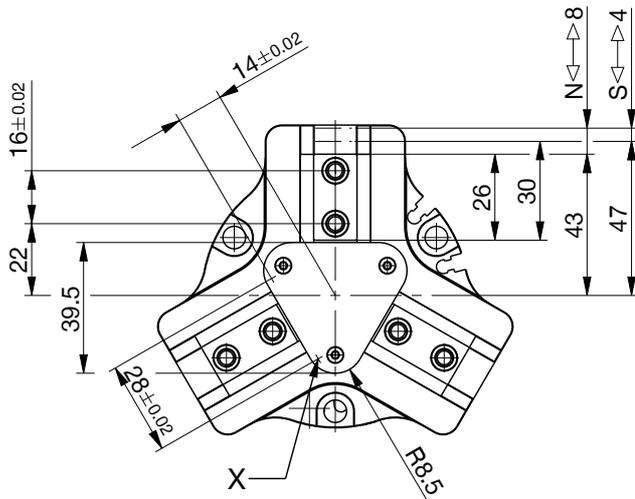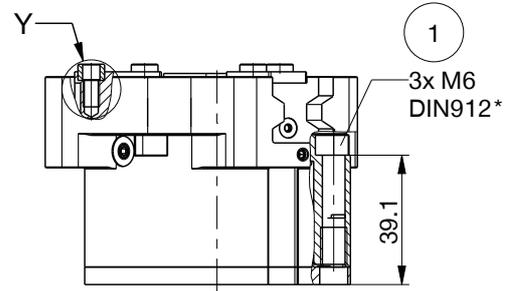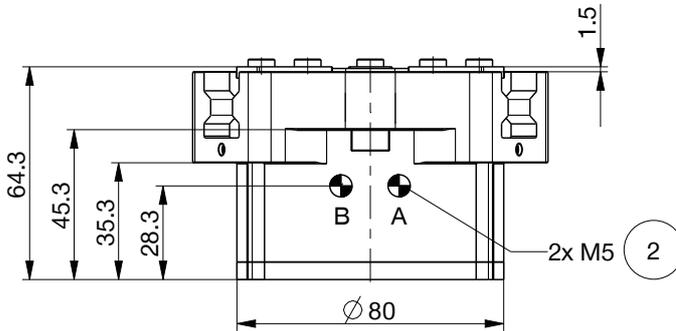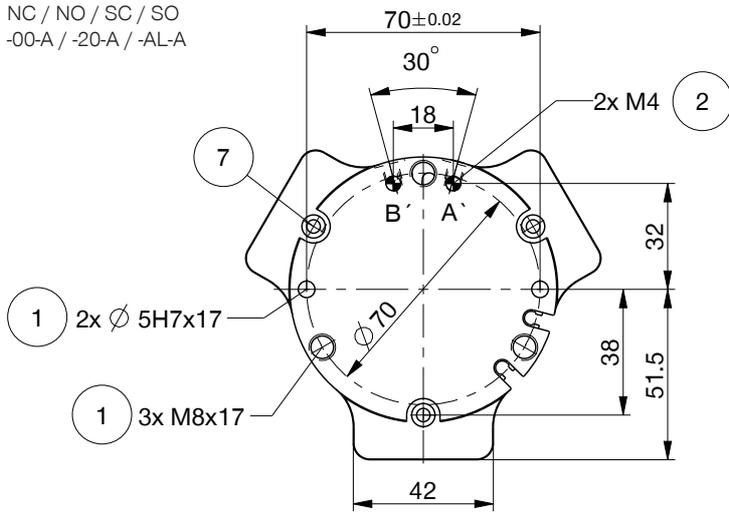


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

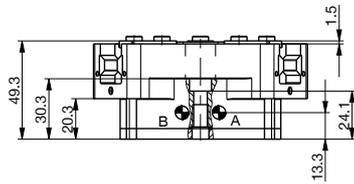

N / NC / NO / S / SC / SO  
-21-A / -24-A

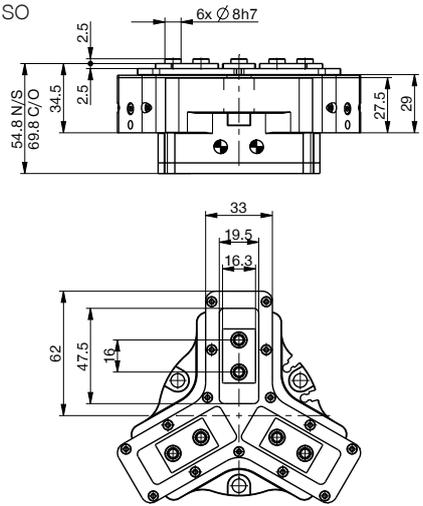

Hoseless air feed-through M4

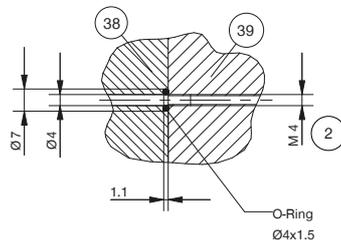


- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑦ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑰ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ㉓ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ㉔ Adapter  |  |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5008

### ▶ ACCESORIES

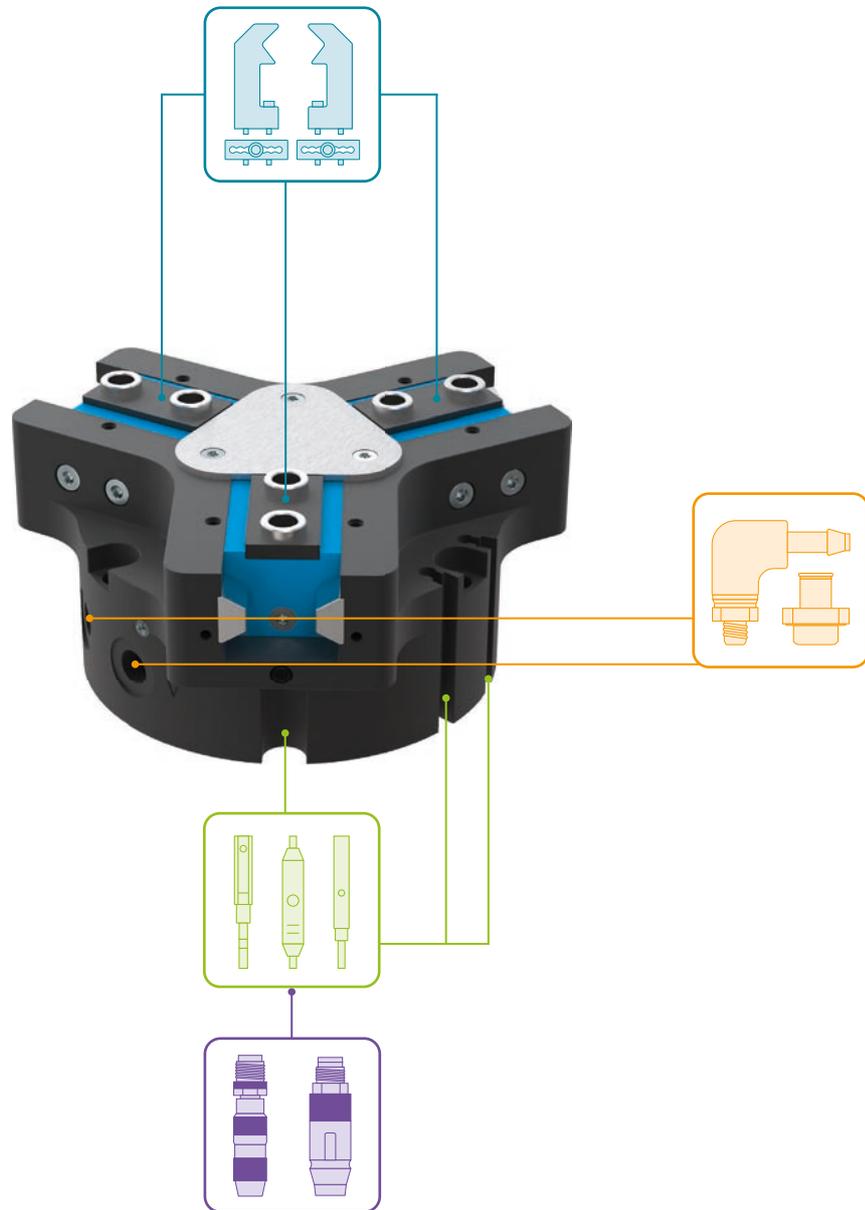

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



**ADS5008-01**  
Pressure piece N / S



**ADS5008-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8

\*Not for variant AL-A



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5010


### PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

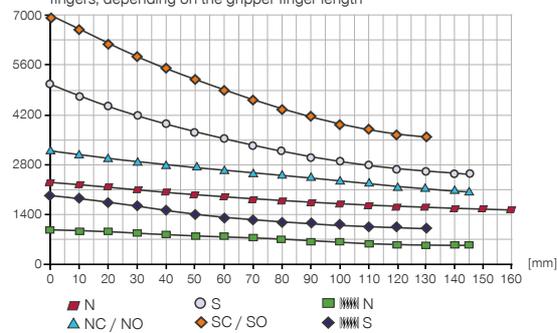

#### Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700

-AL-A

Steel / aluminum guide


#### Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

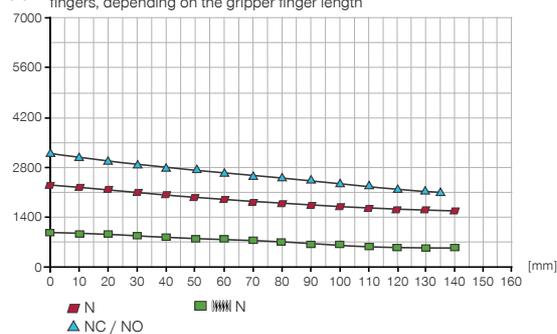

#### Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

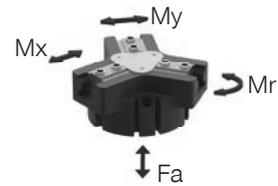

Mr [Nm]	75
Mx [Nm]	115
My [Nm]	90
Fa [N]	2500

### VARIANTS

-00-A / -20-A

Steel / steel guide



-21-A / -24-A

Steel / steel guide



-AL-A

Steel / aluminum guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5010N-00-A	GPD5010NC-00-A	GPD5010NO-00-A	GPD5010S-00-A	GPD5010SC-00-A	GPD5010SO-00-A
Stroke per jaw [mm]	10	10	10	5	5	5
Gripping force in closing [N]	2290	3140		5050	6930	
Gripping force in opening [N]	2400		3250	5280		7160
Gripping force secured by spring min. [N]		850	850		1880	1880
Closing time [s]	0.095	0.095	0.19	0.095	0.095	0.19
Opening time [s]	0.095	0.19	0.095	0.095	0.19	0.095
Permissible weight per jaw max [kg]	1.3	1.3	1.3	1.3	1.3	1.3
Length of the gripper fingers max. [mm]	160	145	145	145	130	130
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	100	200	200	100	200	200
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	1.45	1.9	1.9	1.45	1.9	1.9

Order no.	► Technical Data - High Temperature Version					
	GPD5010N-20-A	GPD5010NC-20-A	GPD5010NO-20-A	GPD5010S-20-A	GPD5010SC-20-A	GPD5010SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5010N-21-A	GPD5010NC-21-A	GPD5010NO-21-A	GPD5010S-21-A	GPD5010SC-21-A	GPD5010SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.8	2.23	2.23	1.8	2.23	2.23

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5010N-24-A	GPD5010NC-24-A	GPD5010NO-24-A	GPD5010S-24-A	GPD5010SC-24-A	GPD5010SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +90
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	1.8	2.23	2.23	1.8	2.23	2.23

\*with purged air (max. 0,5 bar)








Order no.	► Technical data		
	GPD5010N-AL-A	GPD5010NC-AL-A	GPD5010NO-AL-A
Permissible weight per jaw max [kg]	1.1	1.1	1.1
Length of the gripper fingers max. [mm]	140	135	135
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	1.4	1.8	1.8

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5010


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A / -AL-A

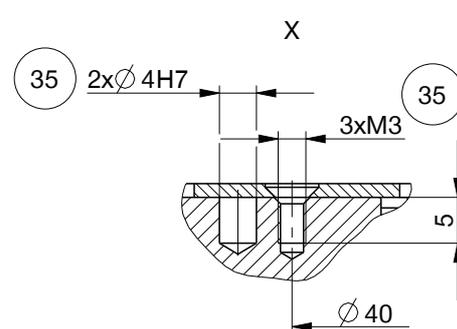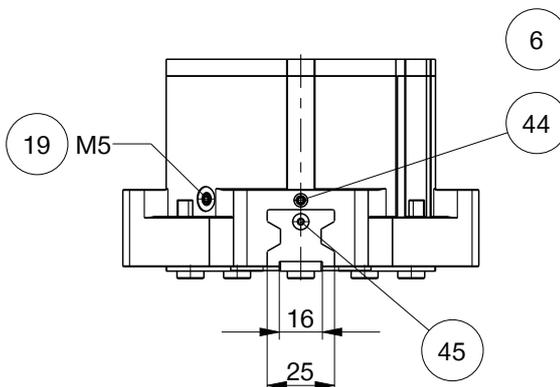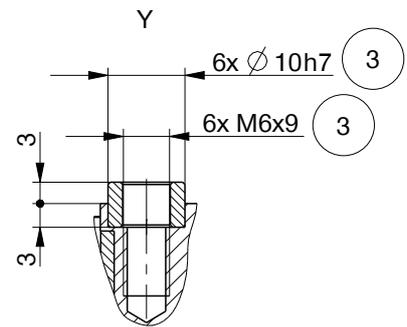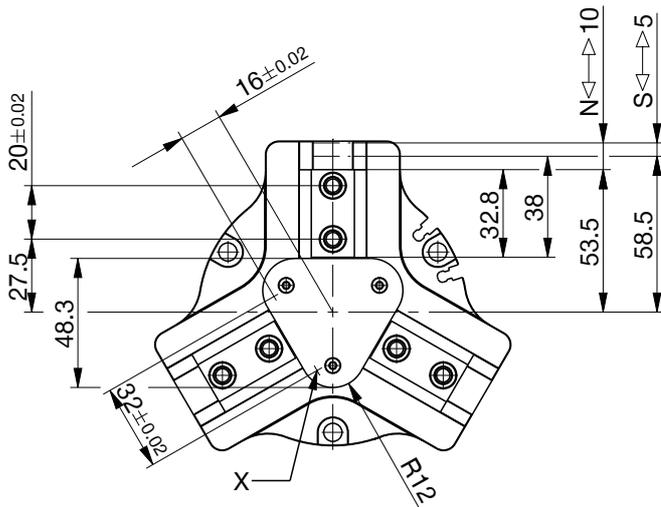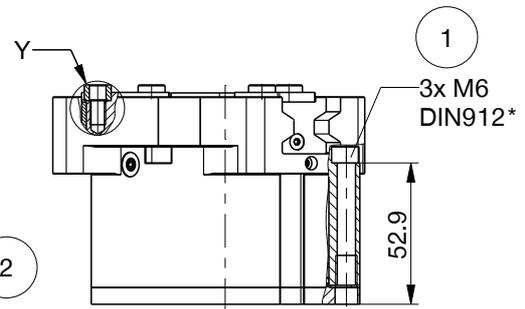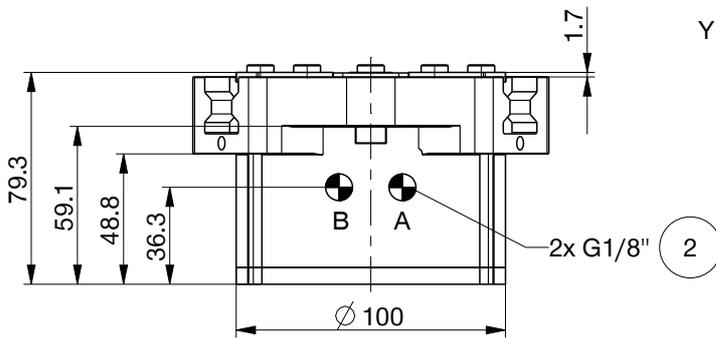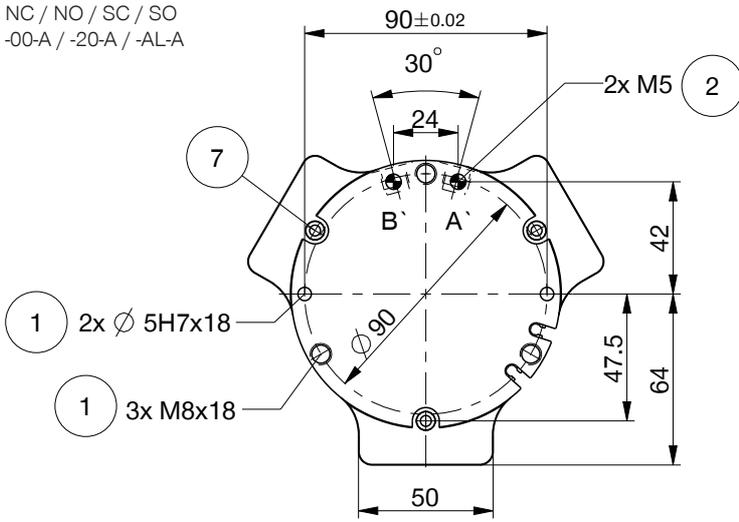


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A / -AL-A

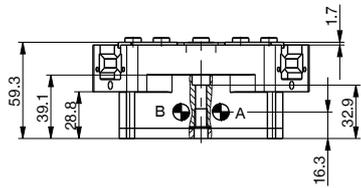

N / NC / NO / S / SC / SO  
-21-A / -24-A

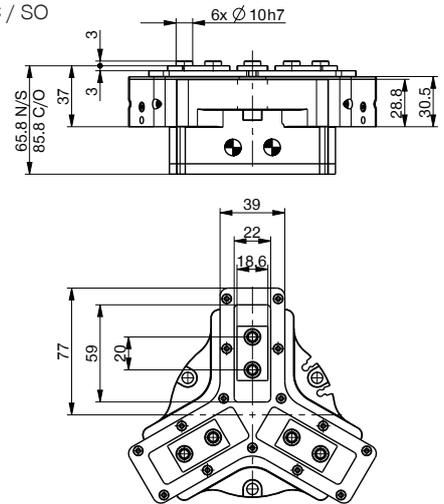

Hoseless air feed-through M5

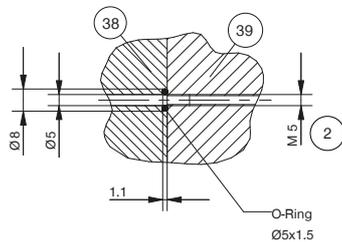


- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑦ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑰ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ㉓ Adapter  |  |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5010

### ▶ ACCESORIES

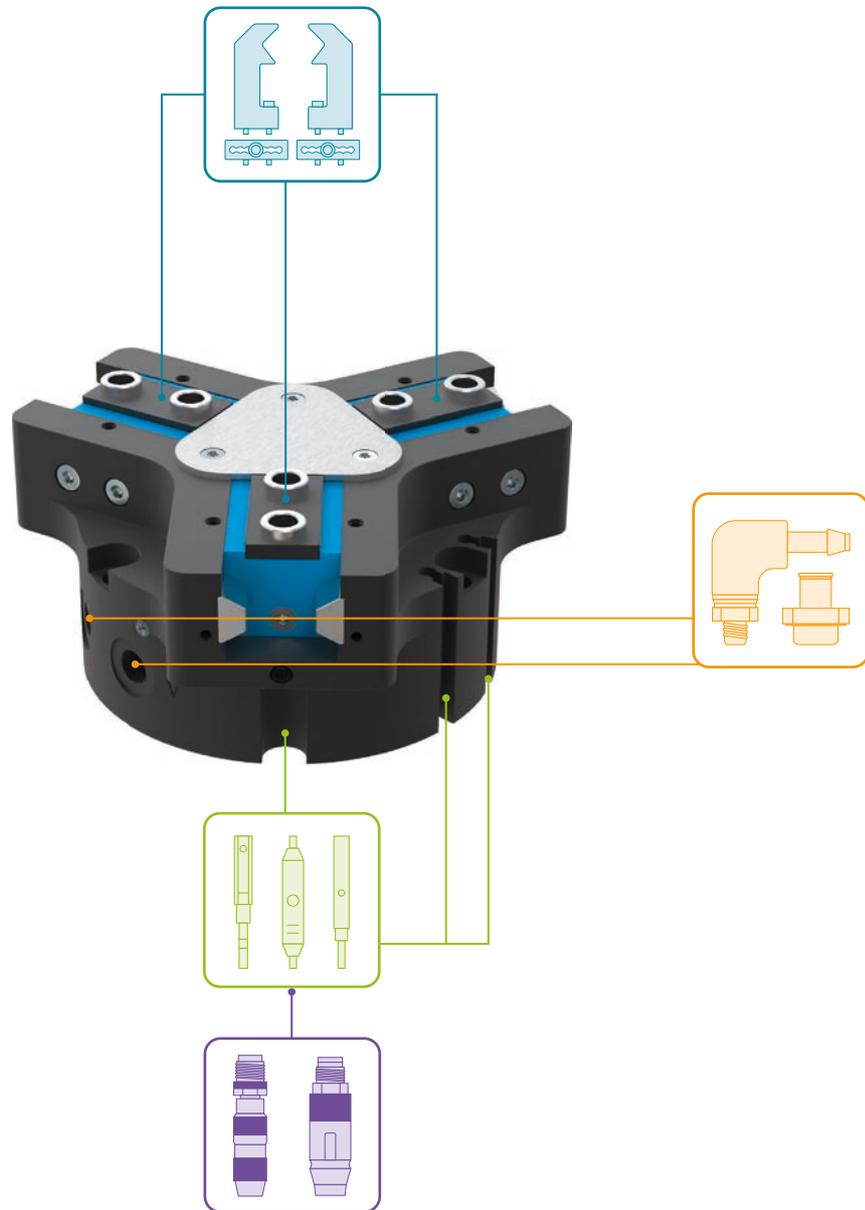

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part



**ADS5010-01**  
Pressure piece N / S



**ADS5010-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ4-E2SK-01**  
Inductive Proximity Switch  
Cable 0,3 m - Connector M8

\*Not for variant AL-A



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5013


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

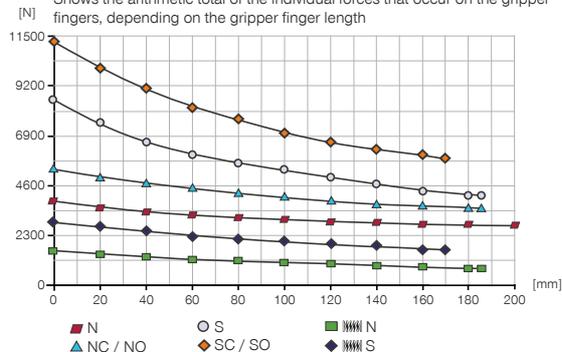

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	110
Mx [Nm]	150
My [Nm]	130
Fa [N]	3300

-AL-A

Steel / aluminum guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

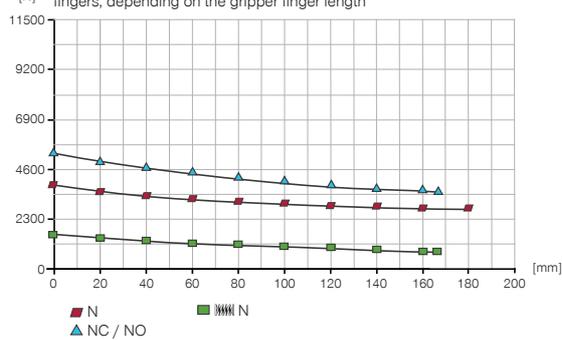

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	100
Mx [Nm]	145
My [Nm]	120
Fa [N]	3200

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide

-AL-A

Steel / aluminum guide



## ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPD5013N-00-A	GPD5013NC-00-A	GPD5013NO-00-A	GPD5013S-00-A	GPD5013SC-00-A	GPD5013SO-00-A
Stroke per jaw [mm]	13	13	13	6	6	6
Gripping force in closing [N]	3770	5060		8310	11160	
Gripping force in opening [N]	3910		5200	8600		11450
Gripping force secured by spring min. [N]		1290	1290		2850	2850
Closing time [s]	0.19	0.15	0.25	0.19	0.15	0.25
Opening time [s]	0.19	0.25	0.15	0.19	0.25	0.15
Permissible weight per jaw max [kg]	2.4	2.4	2.4	2.4	2.4	2.4
Length of the gripper fingers max. [mm]	200	185	185	185	170	170
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	230	415	415	230	415	415
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	2.8	3.7	3.7	2.6	3.7	3.7

Order no.	▶ Technical Data - High Temperature Version					
	GPD5013N-20-A	GPD5013NC-20-A	GPD5013NO-20-A	GPD5013S-20-A	GPD5013SC-20-A	GPD5013SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	▶ Technical Data - Protector Version					
	GPD5013N-21-A	GPD5013NC-21-A	GPD5013NO-21-A	GPD5013S-21-A	GPD5013SC-21-A	GPD5013SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	3.35	4.3	4.3	3.15	4.3	4.3

Order no.	▶ Technical Data - High Temperature Protector Version					
	GPD5013N-24-A	GPD5013NC-24-A	GPD5013NO-24-A	GPD5013S-24-A	GPD5013SC-24-A	GPD5013SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	3.35	4.3	4.3	3.15	4.3	4.3

\*with purged air (max. 0,5 bar)








Order no.	▶ Technical data		
	GPD5013N-AL-A	GPD5013NC-AL-A	GPD5013NO-AL-A
Permissible weight per jaw max [kg]	2.1	2.1	2.1
Length of the gripper fingers max. [mm]	180	170	170
Protection to IEC 60529	IP40	IP40	IP40
Protected against corrosion	No	No	No
Weight [kg]	2.7	3.6	3.6

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5013


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

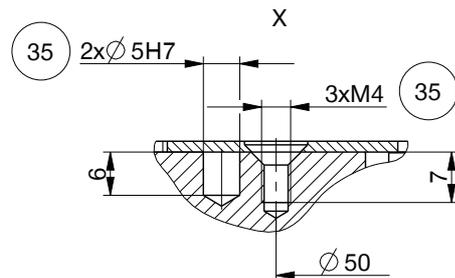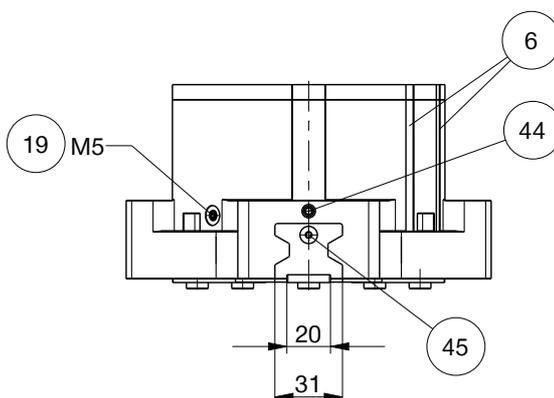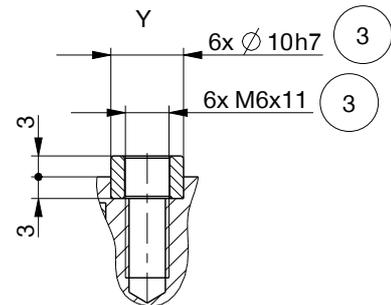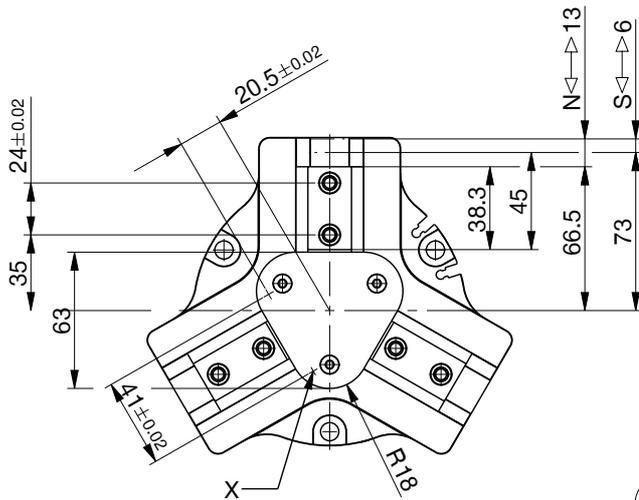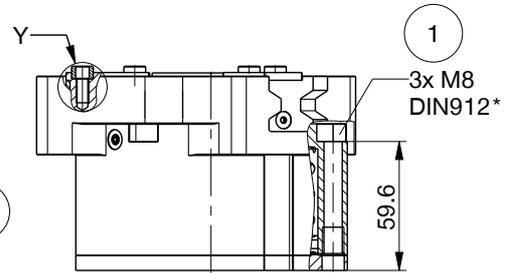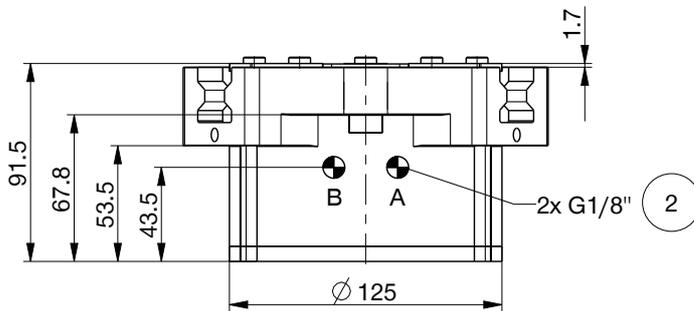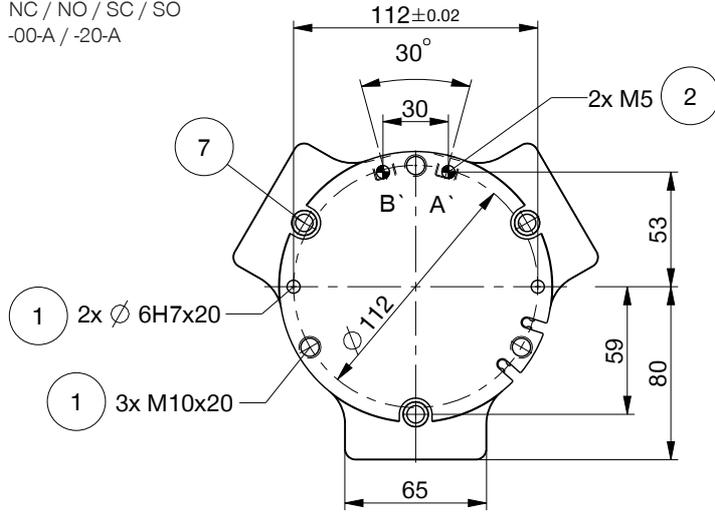


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

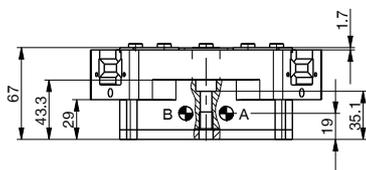

N / NC / NO / S / SC / SO  
-21-A / -24-A

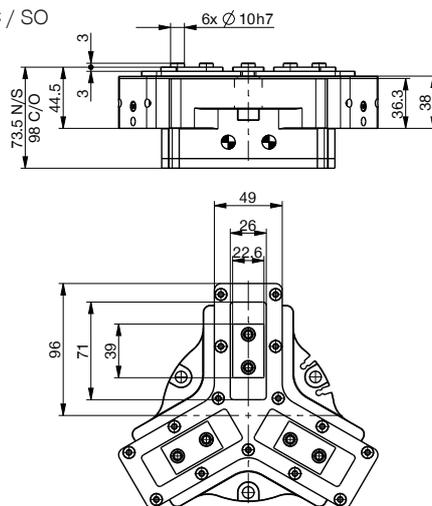

Hoseless air feed-through M5

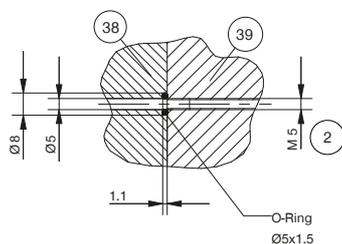


- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ④ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑤ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑥ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ⑦ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ⑧ Adapter  |  |

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5013

### ▶ ACCESORIES

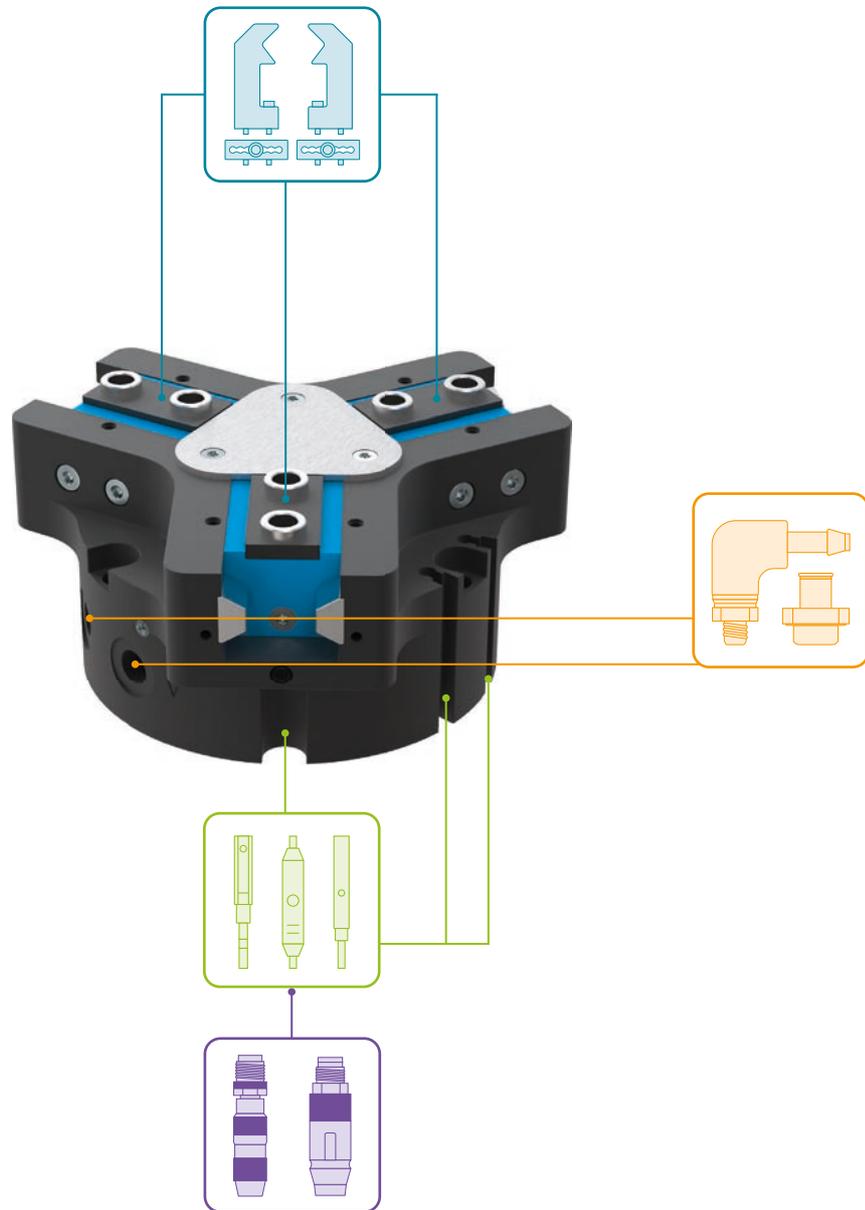

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5013AL**  
Universal jaw aluminium



**UB5013ST**  
Universal jaw steel



**EB5013AL**  
Aluminum adjustment jaw



**EB5013ST**  
Steel adjustment jaw



**WB5013L**  
Changeable jaw, loose-part-set



**WB5013F**  
Changeable jaw, fix-part



**ADS5013-01**  
Pressure piece N / S



**ADS5013-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5016


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

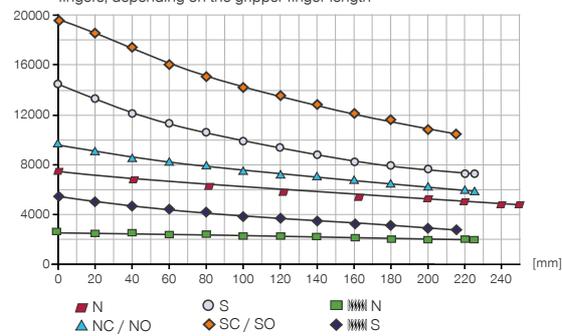

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

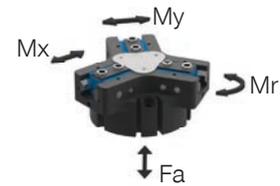

Mr [Nm]	145
Mx [Nm]	195
My [Nm]	185
Fa [N]	5200

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5016N-00-A	GPD5016NC-00-A	GPD5016NO-00-A	GPD5016S-00-A	GPD5016SC-00-A	GPD5016SO-00-A
Stroke per jaw [mm]	16	16	16	8	8	8
Gripping force in closing [N]	6870	9240		14700	19780	
Gripping force in opening [N]	7120		9490	15250		20330
Gripping force secured by spring min. [N]		2370	2370		5080	5080
Closing time [s]	0.4	0.3	0.5	0.4	0.3	0.5
Opening time [s]	0.4	0.5	0.3	0.4	0.5	0.3
Permissible weight per jaw max [kg]	3.8	3.8	3.8	3.8	3.8	3.8
Length of the gripper fingers max. [mm]	245	225	225	225	215	215
Repetition accuracy +/- [mm]	0.02	0.02	0.02	0.02	0.02	0.02
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	525	925	925	525	925	925
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	6.3	8.1	8.1	6.3	8.1	8.1

Order no.	► Technical Data - High Temperature Version					
	GPD5016N-20-A	GPD5016NC-20-A	GPD5016NO-20-A	GPD5016S-20-A	GPD5016SC-20-A	GPD5016SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5016N-21-A	GPD5016NC-21-A	GPD5016NO-21-A	GPD5016S-21-A	GPD5016SC-21-A	GPD5016SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	7.4	9.2	9.2	7.4	9.2	9.2

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5016N-24-A	GPD5016NC-24-A	GPD5016NO-24-A	GPD5016S-24-A	GPD5016SC-24-A	GPD5016SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	7.4	9.2	9.2	7.4	9.2	9.2








\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5016


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

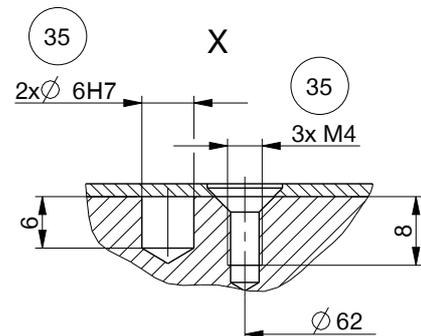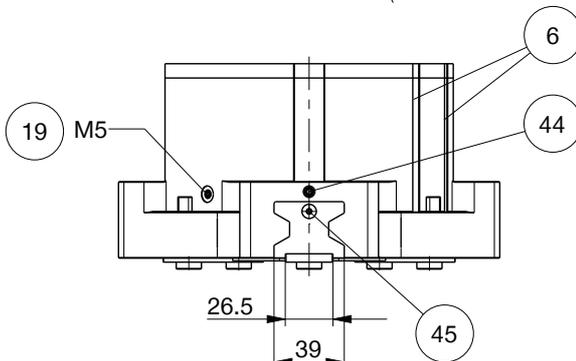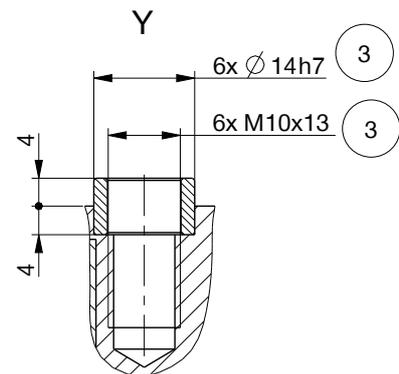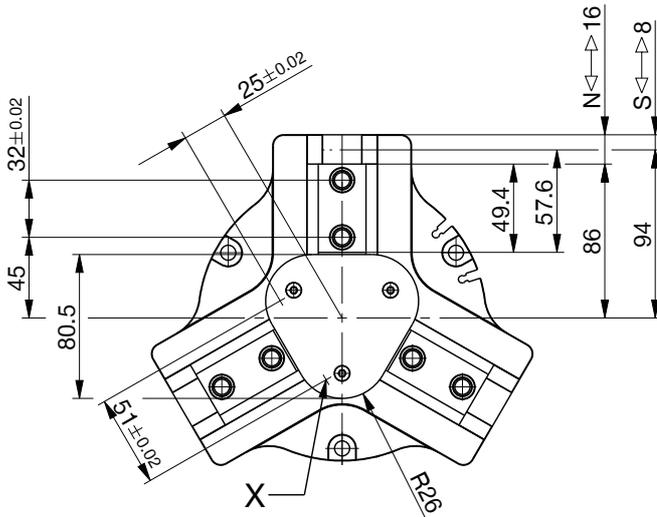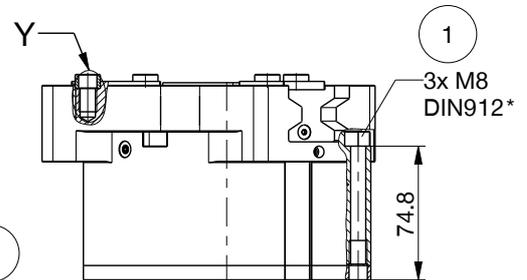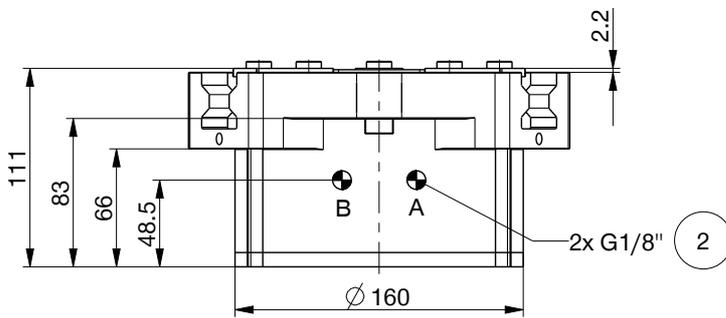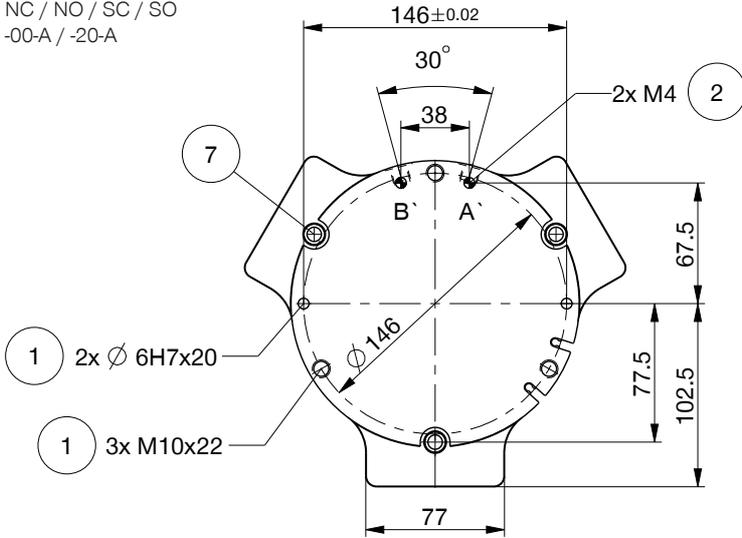


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

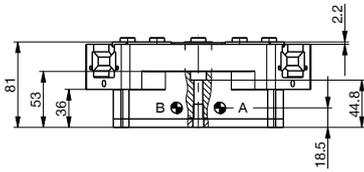

N / NC / NO / S / SC / SO  
-21-A / -24-A

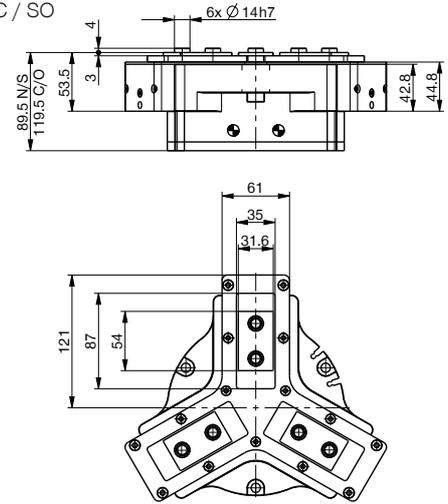

Hoseless air feed-through M4

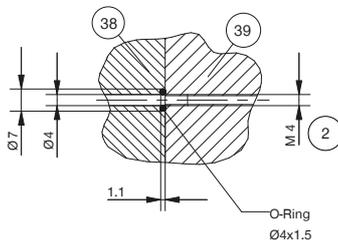


- |  |  |
|--|--|
| ① Gripper attachment                               | ⑳ Gripper                                      |
| ② Energy supply                                    | ㉑ Clamping sensor (not for variant AL-A)       |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment (not for variant AL-A) |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)                       |
| ⑦ Mounting block (not for variant AL-A)            | Ⓑ Air connection (open)                        |
| ⑰ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close)          |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)           |
| ㉓ Adapter  |  |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5016

### ▶ ACCESORIES

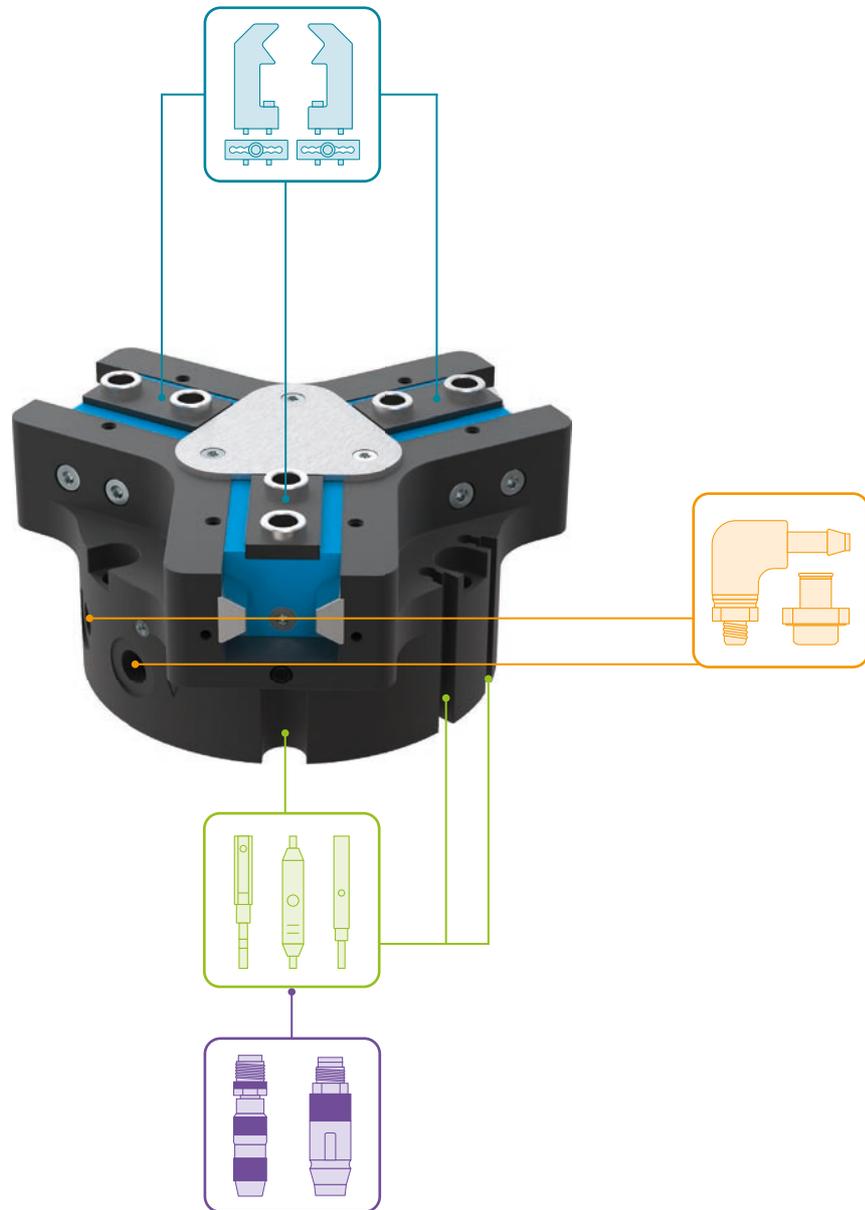

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

019387

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5016AL**  
Universal jaw aluminium



**UB5016ST**  
Universal jaw steel



**EB5016AL**  
Aluminum adjustment jaw



**EB5016ST**  
Steel adjustment jaw



**WB5016L**  
Changeable jaw, loose-part-set



**WB5016F**  
Changeable jaw, fix-part



**ADS5016-01**  
Pressure piece N / S



**ADS5016-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5025


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide

#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

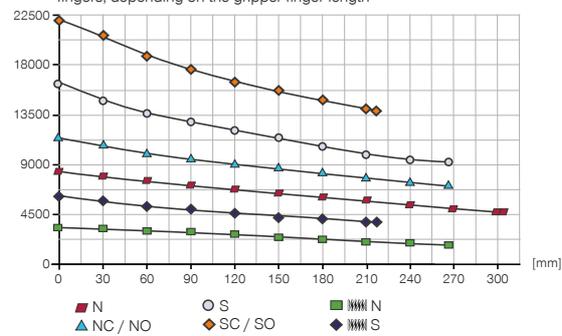

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	180
Mx [Nm]	205
My [Nm]	225
Fa [N]	7500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5025N-00-A	GPD5025NC-00-A	GPD5025NO-00-A	GPD5025S-00-A	GPD5025SC-00-A	GPD5025SO-00-A
Stroke per jaw [mm]	25	25	25	14	14	14
Gripping force in closing [N]	8430	11560		16240	22270	
Gripping force in opening [N]	8730		11860	16820		22850
Gripping force secured by spring min. [N]		3130	3130		6030	6030
Closing time [s]	0.6	0.6	1.0	0.6	0.6	1.0
Opening time [s]	0.6	1.0	0.6	0.6	1.0	0.6
Permissible weight per jaw max [kg]	7	7	7	7	7	7
Length of the gripper fingers max. [mm]	310	265	265	265	220	220
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	1025	1750	1750	1025	1750	1750
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	11.8	15.4	15.4	11.8	15.4	15.4

Order no.	► Technical Data - High Temperature Version					
	GPD5025N-20-A	GPD5025NC-20-A	GPD5025NO-20-A	GPD5025S-20-A	GPD5025SC-20-A	GPD5025SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5025N-21-A	GPD5025NC-21-A	GPD5025NO-21-A	GPD5025S-21-A	GPD5025SC-21-A	GPD5025SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	14	17.6	17.6	14	17.6	17.6

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5025N-24-A	GPD5025NC-24-A	GPD5025NO-24-A	GPD5025S-24-A	GPD5025SC-24-A	GPD5025SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	14	17.6	17.6	14	17.6	17.6








\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5025


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

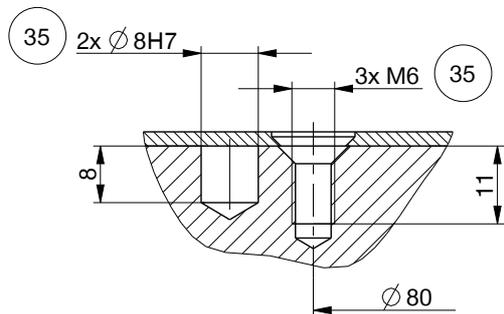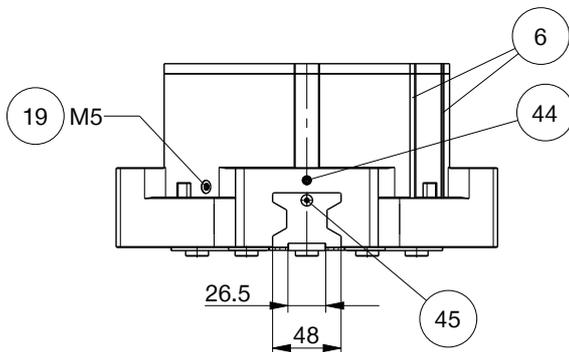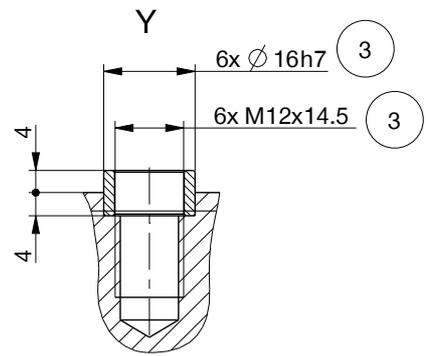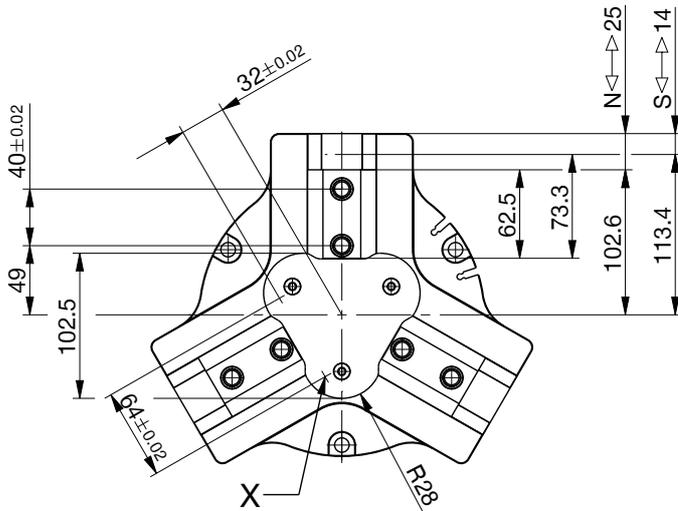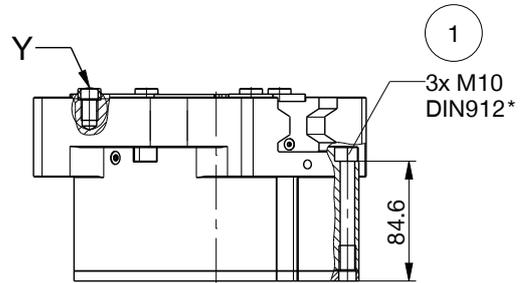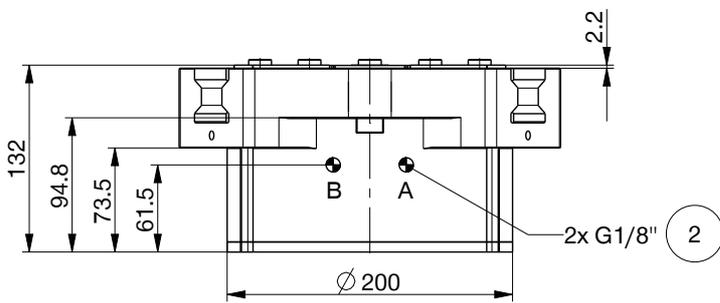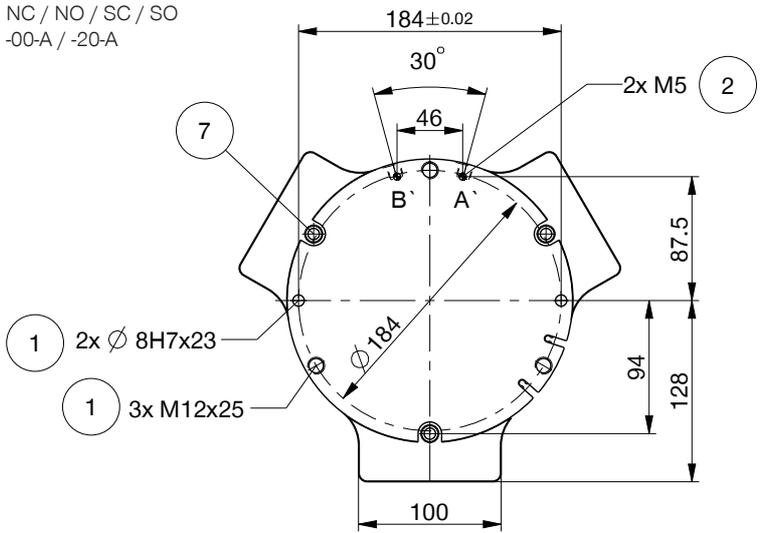


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

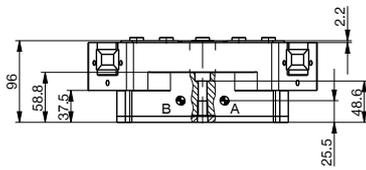

N / NC / NO / S / SC / SO  
-21-A / -24-A

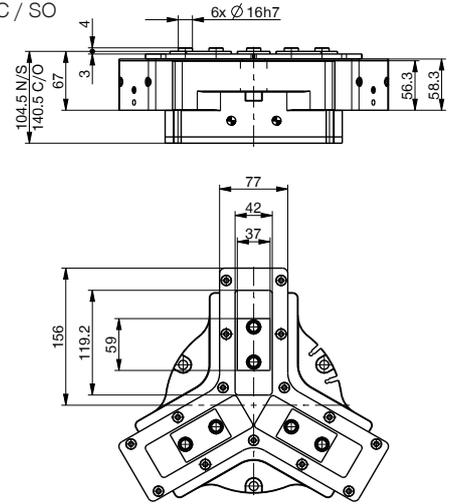

Hoseless air feed-through M5

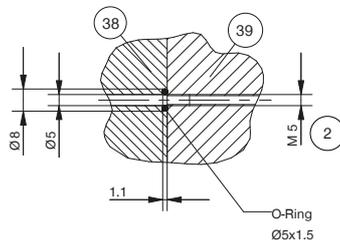


- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉑ Adapter  |                                       |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5025

### ▶ ACCESORIES

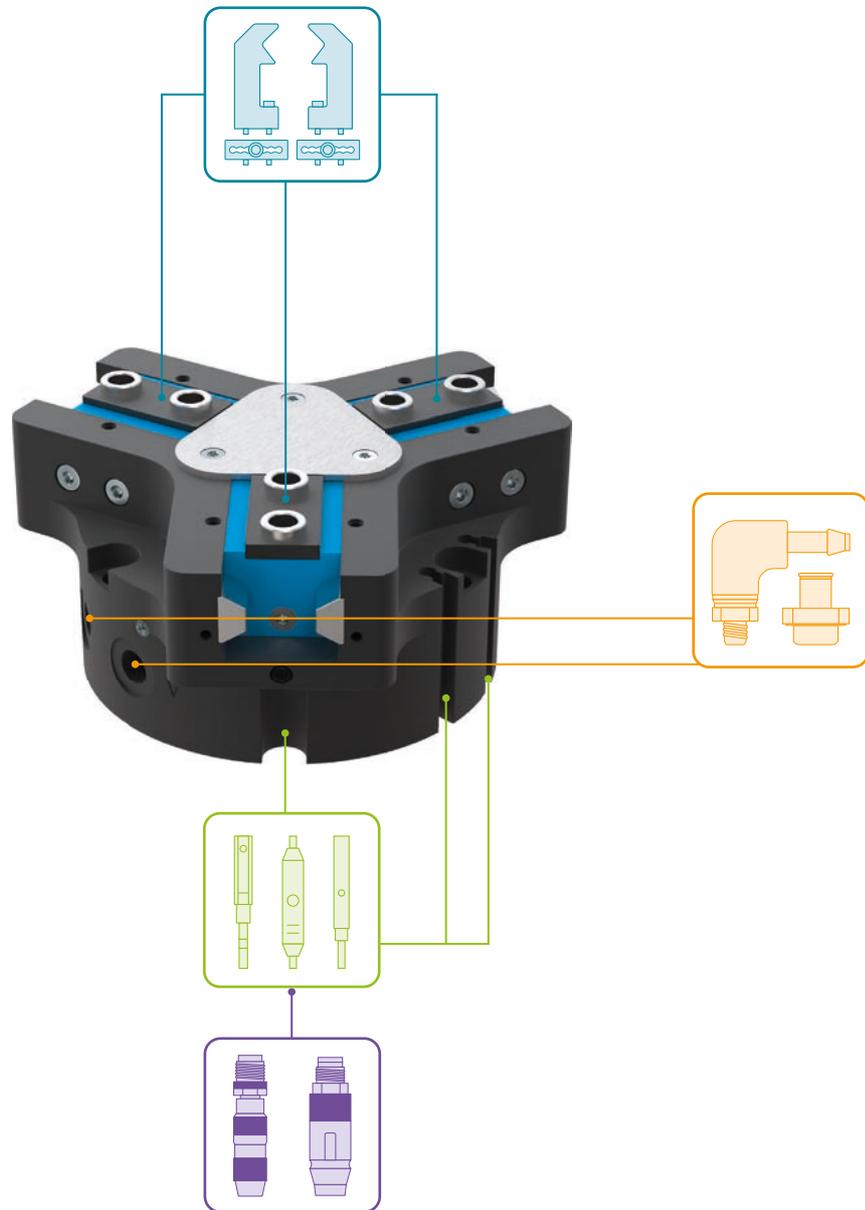

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

030529

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5025AL**  
Universal jaw aluminium



**UB5025ST**  
Universal jaw steel



**EB5025AL**  
Aluminum adjustment jaw



**EB5025ST**  
Steel adjustment jaw



**WB5025L**  
Changeable jaw, loose-part-set



**WB5025F**  
Changeable jaw, fix-part



**ADS5025-01**  
Pressure piece N / S



**ADS5025-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 3-JAW CONCENTRIC GRIPPERS


## INSTALLATION SIZE GPD5030

### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A


Steel / steel guide

#### ▶ Gripping force diagram

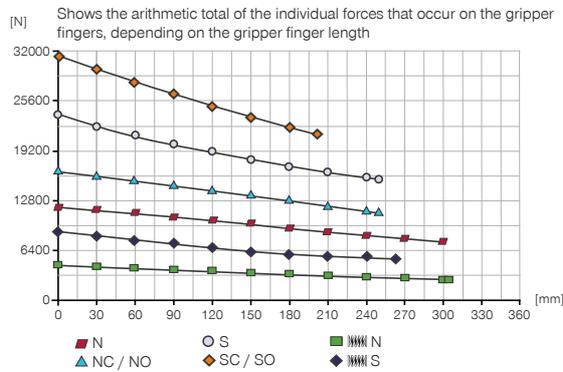

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

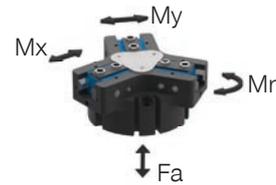

Mr [Nm]	210
Mx [Nm]	290
My [Nm]	310
Fa [N]	9500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5030N-00-A	GPD5030NC-00-A	GPD5030NO-00-A	GPD5030S-00-A	GPD5030SC-00-A	GPD5030SO-00-A
Stroke per jaw [mm]	30	30	30	17	17	17
Gripping force in closing [N]	12130	16560		23150	31620	
Gripping force in opening [N]	12540		16970	23930		32400
Gripping force secured by spring min. [N]		4430	4430		8470	8470
Closing time [s]	1.13	1.0	1.9	1.13	1.0	1.9
Opening time [s]	1.13	1.9	1.0	1.13	1.9	1.0
Permissible weight per jaw max [kg]	9.5	9.5	9.5	9.5	9.5	9.5
Length of the gripper fingers max. [mm]	300	250	250	250	200	200
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	1780	3000	3000	1780	3000	3000
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	21	27.5	27.5	21	27.5	27.5

Order no.	► Technical Data - High Temperature Version					
	GPD5030N-20-A	GPD5030NC-20-A	GPD5030NO-20-A	GPD5030S-20-A	GPD5030SC-20-A	GPD5030SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5030N-21-A	GPD5030NC-21-A	GPD5030NO-21-A	GPD5030S-21-A	GPD5030SC-21-A	GPD5030SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	24	30.5	30.5	24	30.5	30.5

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5030N-24-A	GPD5030NC-24-A	GPD5030NO-24-A	GPD5030S-24-A	GPD5030SC-24-A	GPD5030SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	24	30.5	30.5	24	30.5	30.5








\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5030


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

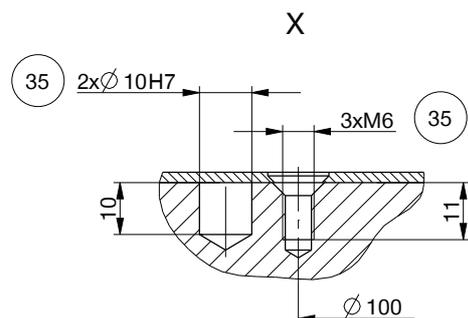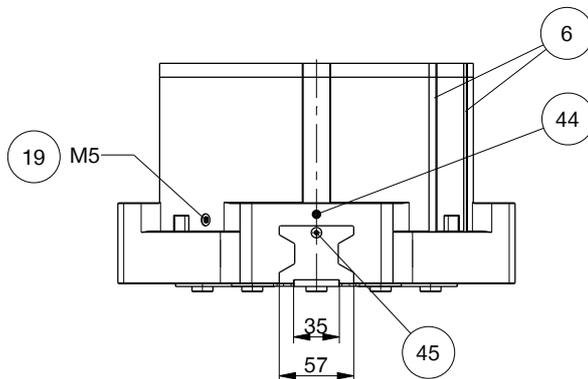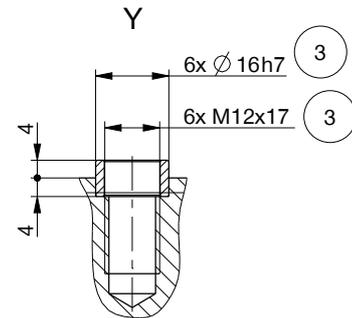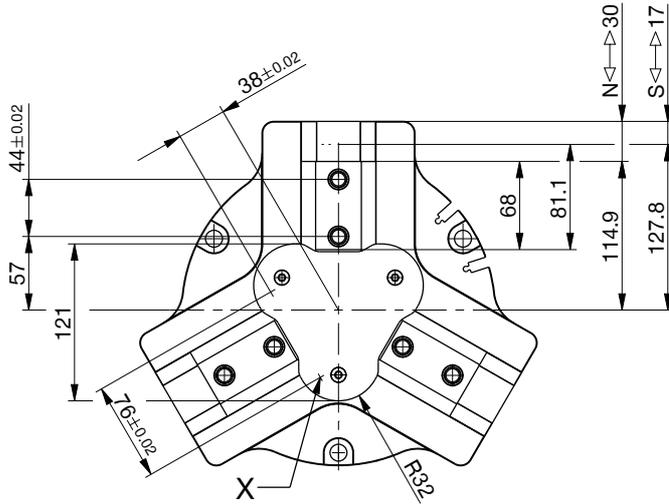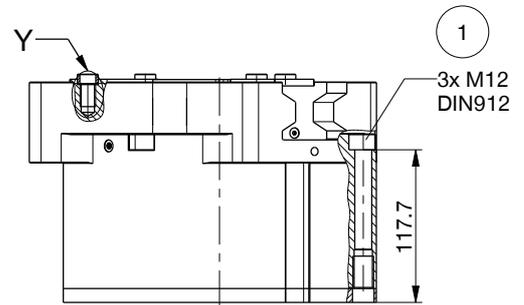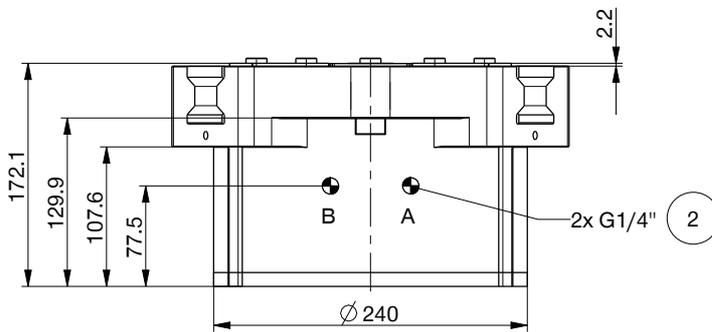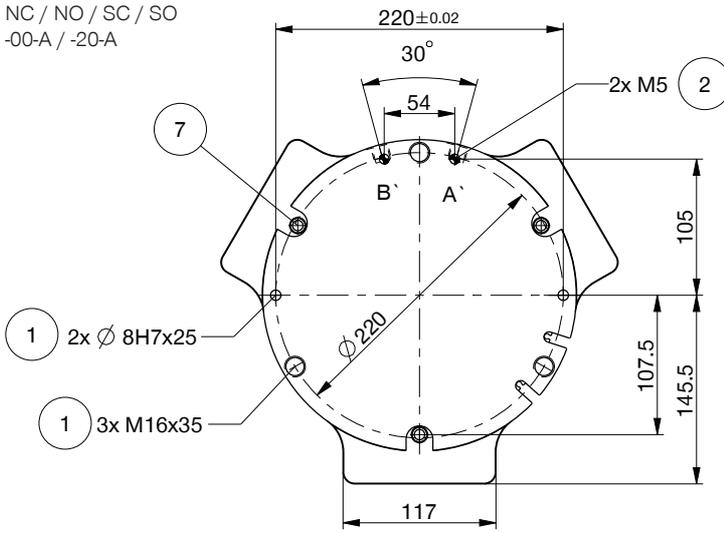


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

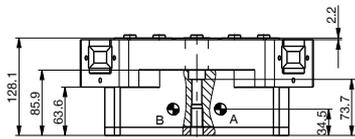

N / NC / NO / S / SC / SO  
-21-A / -24-A

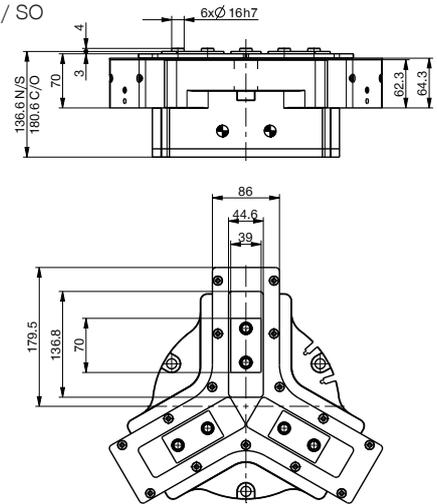

Hoseless air feed-through M5

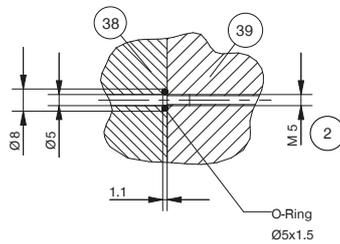


- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉓ Adapter  |                                       |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5030

### ▶ ACCESORIES

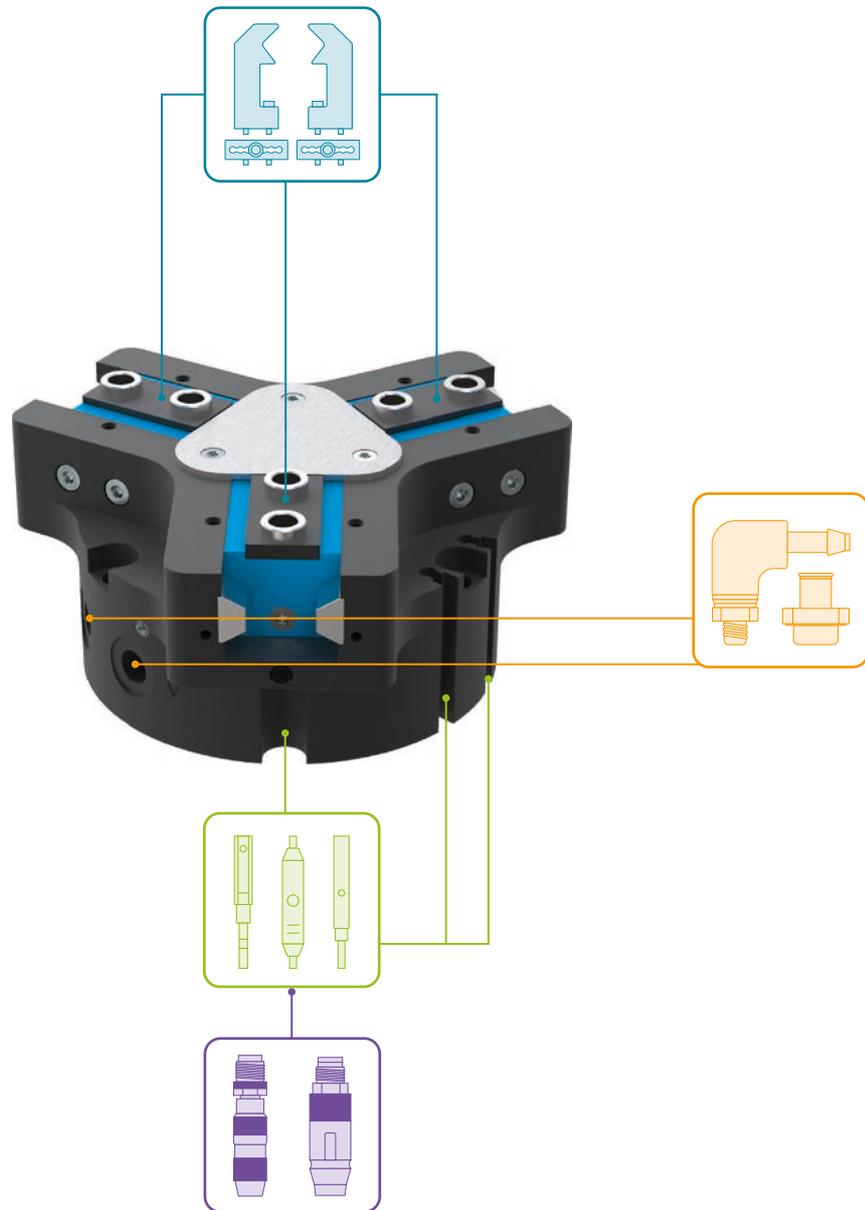

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

030529

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5030AL**  
Universal jaw aluminium



**UB5030ST**  
Universal jaw steel



**EB5030AL**  
Aluminum adjustment jaw



**EB5030ST**  
Steel adjustment jaw



**WB5030L**  
Changeable jaw, loose-part-set



**WB5030F**  
Changeable jaw, fix-part



**ADS5030-01**  
Pressure piece N / S



**ADS5030-02**  
Pressure piece NC / NO / SC / SO



### ENERGY SUPPLY



**WV1-4X8**  
Angled Fittings - Quick Connect Style



**DSV1-4**  
Pressure safety valve



**DSV1-4E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5035


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

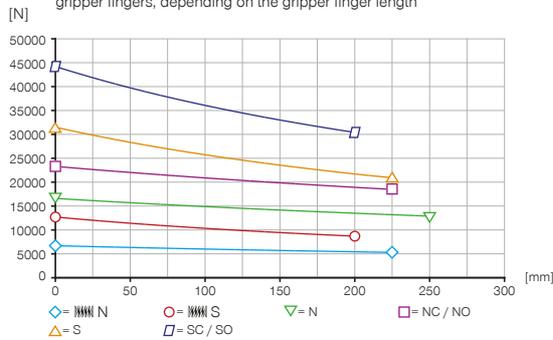

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

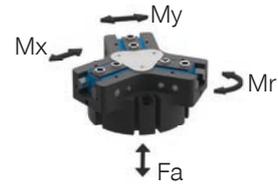

Mr [Nm]	260
Mx [Nm]	430
My [Nm]	450
Fa [N]	10400

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5035N-00-A	GPD5035NC-00-A	GPD5035NO-00-A	GPD5035S-00-A	GPD5035SC-00-A	GPD5035SO-00-A
Stroke per jaw [mm]	35	35	35	20	20	20
Gripping force in closing [N]	16600	23300		31500	44200	
Gripping force in opening [N]	17100		23800	32500		45200
Gripping force secured by spring min. [N]		6700	6700		12700	12700
Closing time [s]	1.2	1.1	2.3	1.2	1.1	2.3
Opening time [s]	1.2	2.3	1.2	1.2	2.3	1.2
Permissible weight per jaw max [kg]	12.5	12.5	12.5	12.5	12.5	12.5
Length of the gripper fingers max. [mm]	250	225	225	225	200	200
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	6.5	6.5	8	6.5	6.5
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	2904	5477	5477	2904	5477	5477
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	37.8	42	42	37.8	42	42

Order no.	► Technical Data - High Temperature Version					
	GPD5035N-20-A	GPD5035NC-20-A	GPD5035NO-20-A	GPD5035S-20-A	GPD5035SC-20-A	GPD5035SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5035N-21-A	GPD5035NC-21-A	GPD5035NO-21-A	GPD5035S-21-A	GPD5035SC-21-A	GPD5035SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	43.8	48	48	43.8	48	48

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5035N-24-A	GPD5035NC-24-A	GPD5035NO-24-A	GPD5035S-24-A	GPD5035SC-24-A	GPD5035SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	43.8	48	48	43.8	48	48








\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5035


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

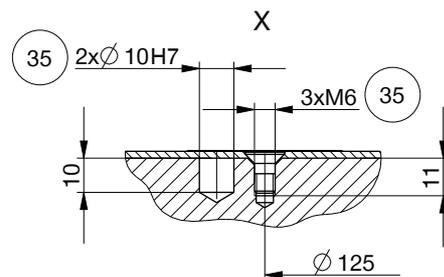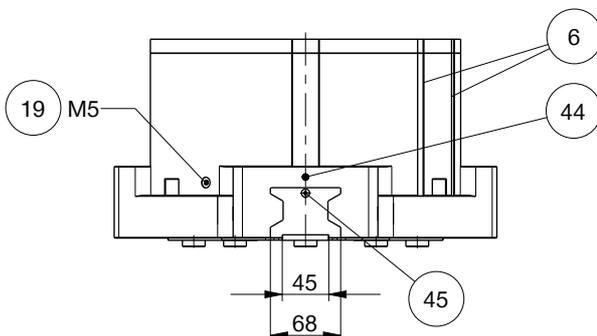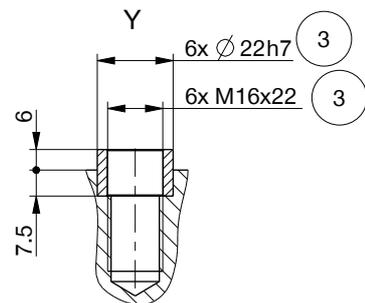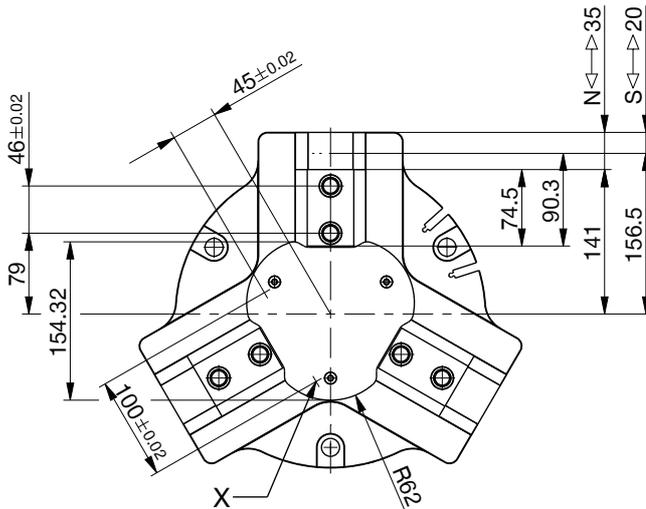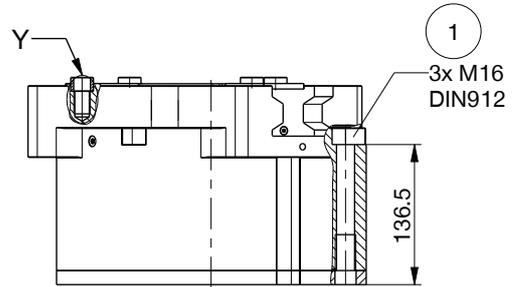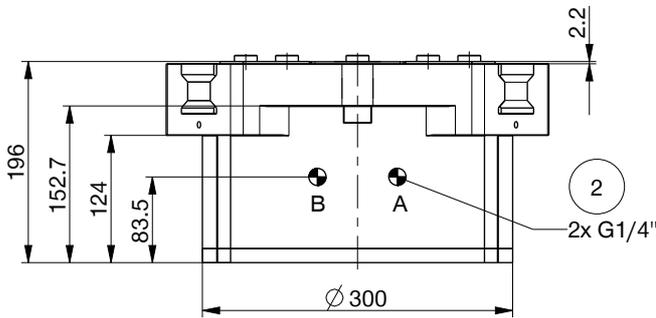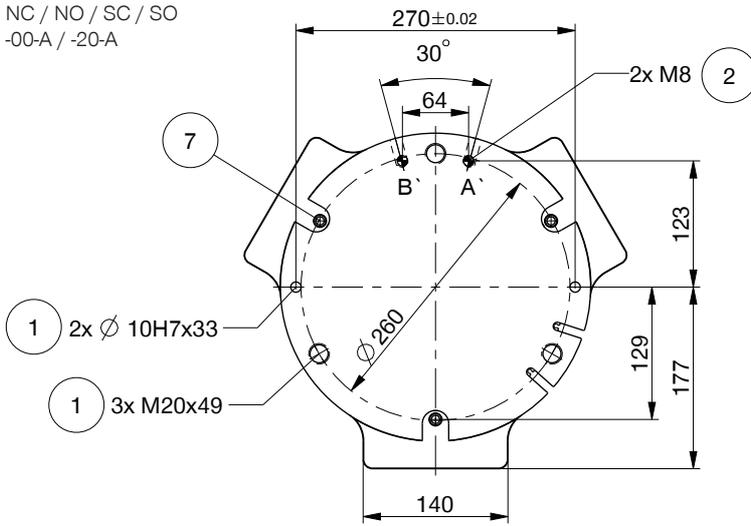


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

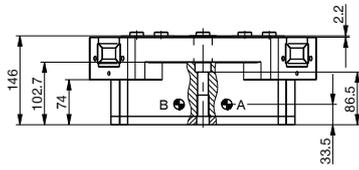

N / NC / NO / S / SC / SO  
-21-A / -24-A

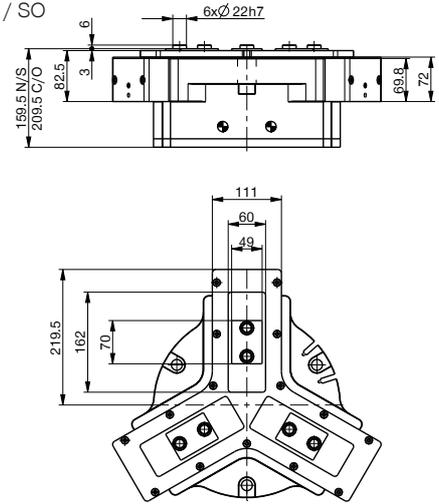

Hoseless air feed-through M8

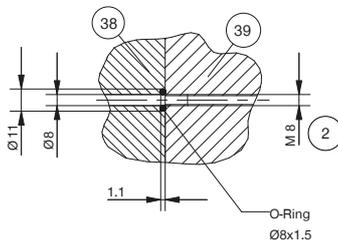


- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉓ Adapter  |                                       |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5035

### ▶ ACCESORIES

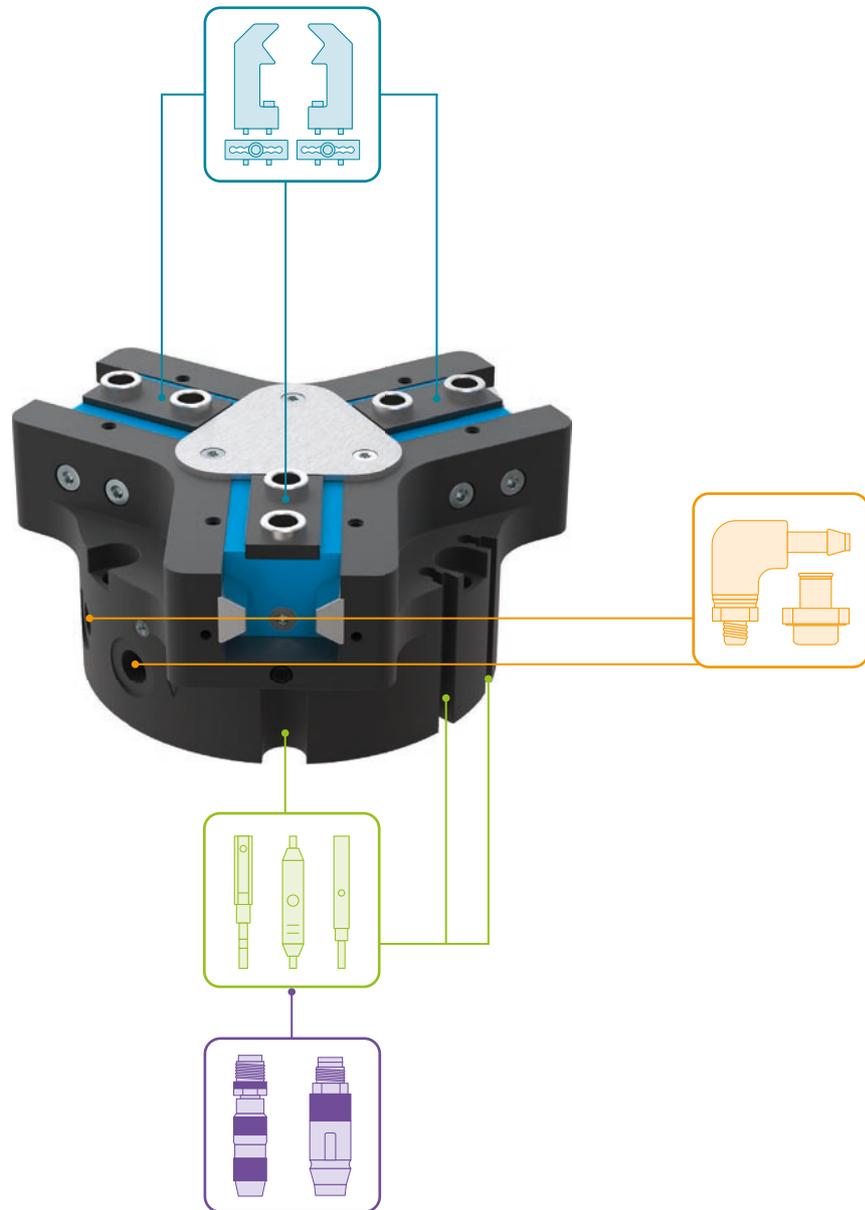

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

035358

## ▶ RECOMMENDED ACCESSORIES



### ENERGY SUPPLY



**GV1-4X8**  
Straight Fittings - Quick  
Connect Style



**WV1-4X8**  
Angled Fittings - Quick  
Connect Style



**DSV1-4**  
Pressure safety valve



**DSV1-4E**  
Pressure safety valve with  
quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch  
- Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled  
Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight  
Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable  
0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Ca-  
ble 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customiz-  
able Straight - Connector M8

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5045


### ▶ PRODUCT SPECIFICATIONS

-00-A / -20-A / -21-A / -24-A

Steel / steel guide


#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

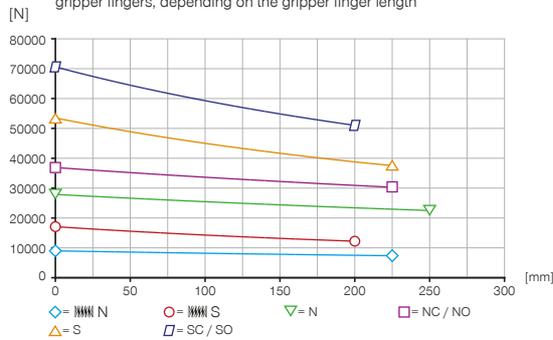

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.

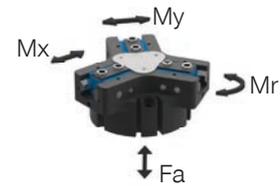

Mr [Nm]	390
Mx [Nm]	580
My [Nm]	600
Fa [N]	11500

### ▶ VARIANTS

-00-A / -20-A

Steel / steel guide

-21-A / -24-A

Steel / steel guide



## ► TECHNICAL DATA

Order no.	► Technical data					
	GPD5045N-00-A	GPD5045NC-00-A	GPD5045NO-00-A	GPD5045S-00-A	GPD5045SC-00-A	GPD5045SO-00-A
Stroke per jaw [mm]	45	45	45	26	26	26
Gripping force in closing [N]	27900	36900		53500	70600	
Gripping force in opening [N]	28850		37850	55400		72500
Gripping force secured by spring min. [N]		9000	9000		17100	17100
Closing time [s]	2.0	1.7	2.8	2.0	1.7	2.8
Opening time [s]	2.0	2.8	1.7	2.0	2.8	1.7
Permissible weight per jaw max [kg]	12.5	12.5	12.5	12.5	12.5	12.5
Length of the gripper fingers max. [mm]	250	225	225	225	200	200
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	6.5	6.5	8	6.5	6.5
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90	-10 ... +90
Air volume per cycle [cm <sup>3</sup> ]	6500	12400	12400	6500	12400	12400
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	78.6	86.5	86.5	80	88	88

Order no.	► Technical Data - High Temperature Version					
	GPD5045N-20-A	GPD5045NC-20-A	GPD5045NO-20-A	GPD5045S-20-A	GPD5045SC-20-A	GPD5045SO-20-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130

Order no.	► Technical Data - Protector Version					
	GPD5045N-21-A	GPD5045NC-21-A	GPD5045NO-21-A	GPD5045S-21-A	GPD5045SC-21-A	GPD5045SO-21-A
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	90.5	98.4	98.4	91.9	99.9	99.9

Order no.	► Technical Data - High Temperature Protector Version					
	GPD5045N-24-A	GPD5045NC-24-A	GPD5045NO-24-A	GPD5045S-24-A	GPD5045SC-24-A	GPD5045SO-24-A
Operating temperature [°C]	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130	-10 ... +130
Protection to IEC 60529	IP67*	IP67*	IP67*	IP67*	IP67*	IP67*
Weight [kg]	90.5	98.4	98.4	91.9	99.9	99.9


\*with purged air (max. 0,5 bar)

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5045


### TECHNICAL DRAWINGS

NC / NO / SC / SO  
-00-A / -20-A

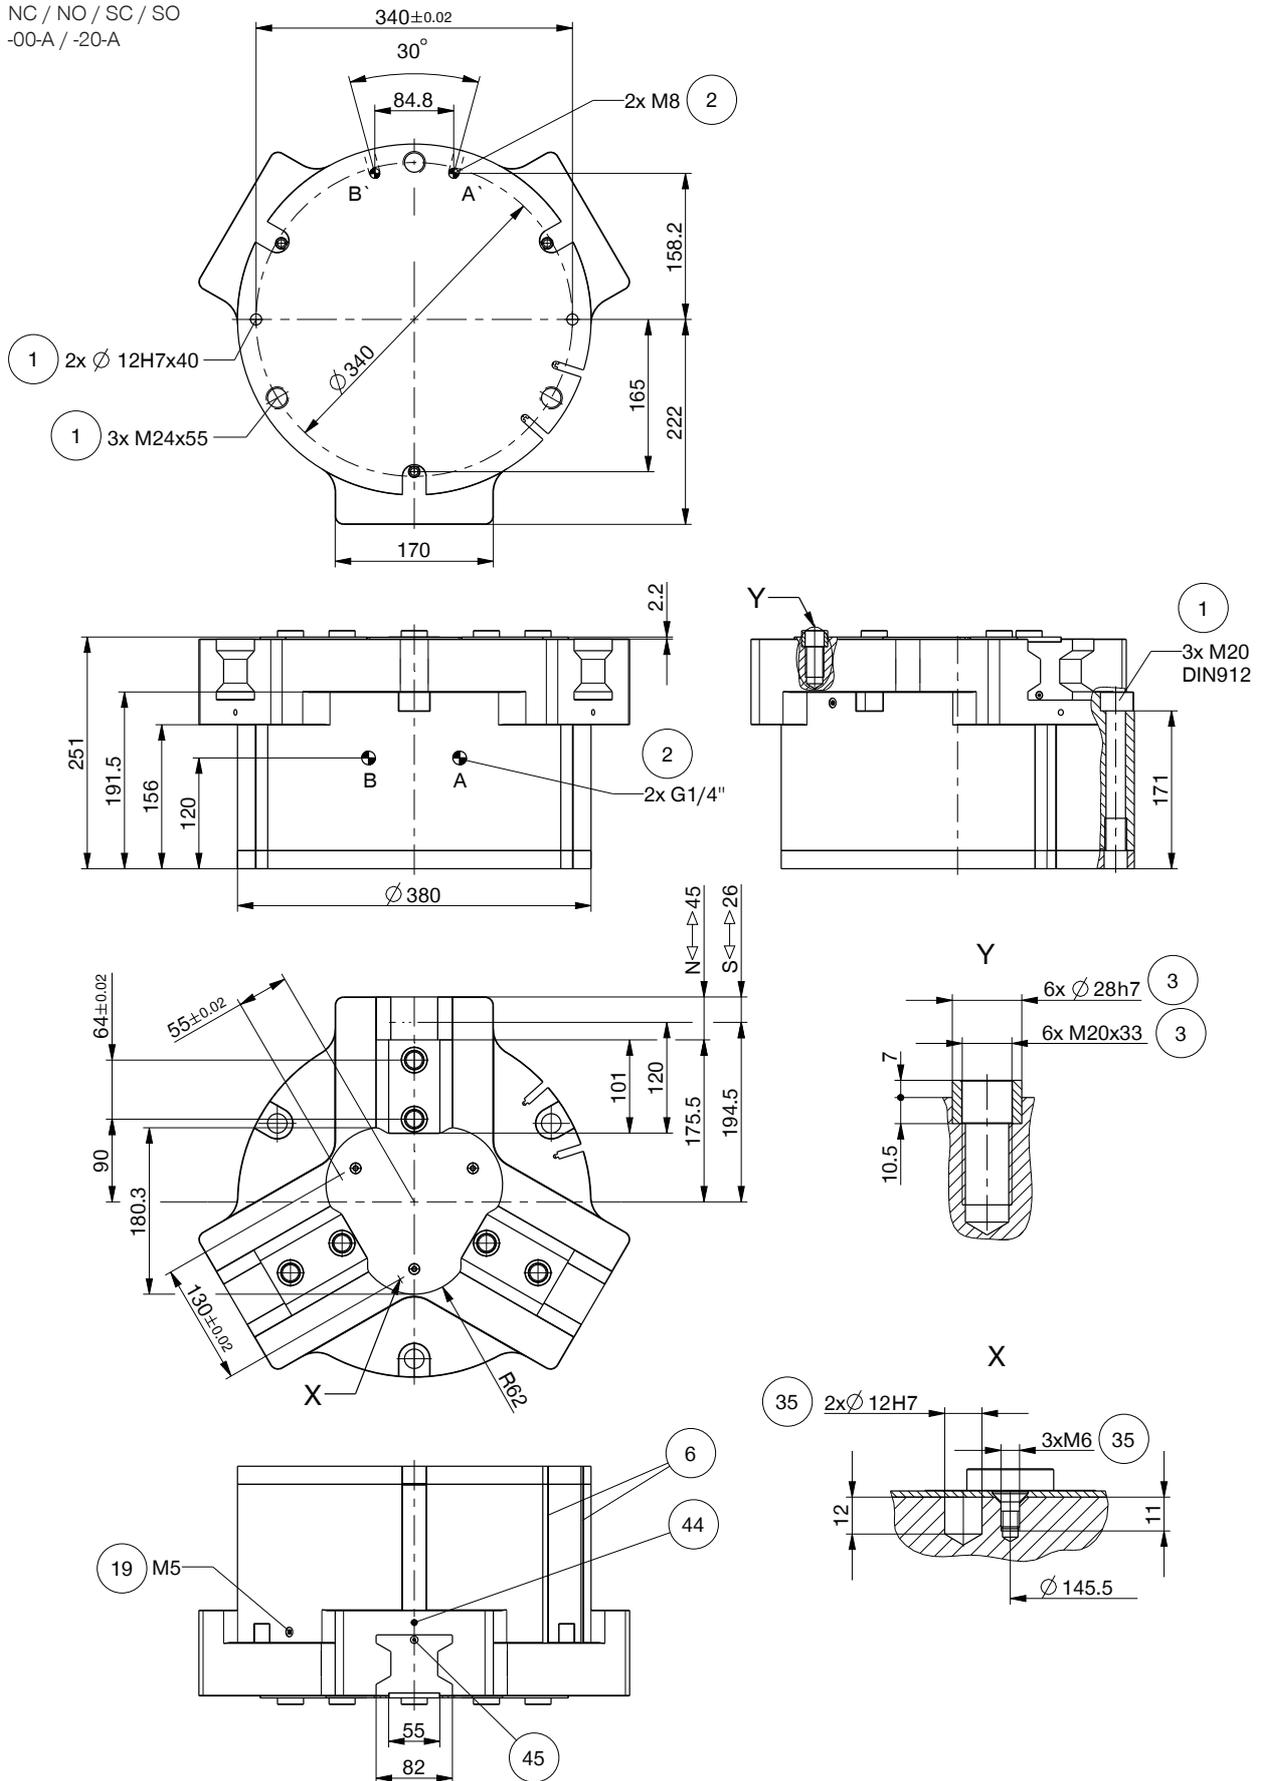


## TECHNICAL DRAWINGS


N / S  
-00-A / -20-A

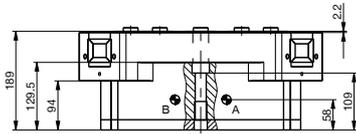

N / NC / NO / S / SC / SO  
-21-A / -24-A

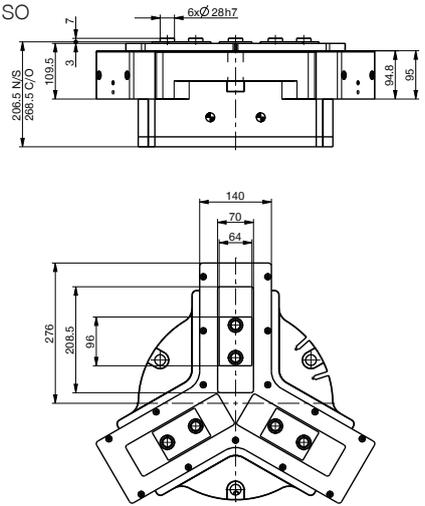

Hoseless air feed-through M8

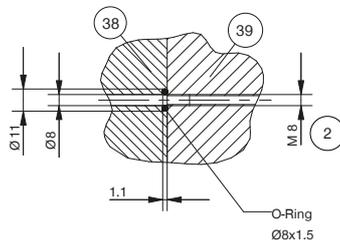


- |  |                                       |
|--|---------------------------------------|
| ① Gripper attachment                               | ⑳ Gripper                             |
| ② Energy supply                                    | ㉑ Clamp for sensor                    |
| ③ Fixing for gripper finger                        | ㉒ Switch cam adjustment               |
| ⑥ Integrated slot for magnetic field sensor        | Ⓐ Air connection (close)              |
| ⑦ Mounting block                                   | Ⓑ Air connection (open)               |
| ⑲ Air purge connection option (max. 0,5 bar)       | Ⓐ Air connection, alternative (close) |
| ⑳ Attachment option for customer-specific fittings | Ⓑ Air connection, alternative (open)  |
| ㉓ Adapter  |                                       |



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5045

### ▶ ACCESORIES

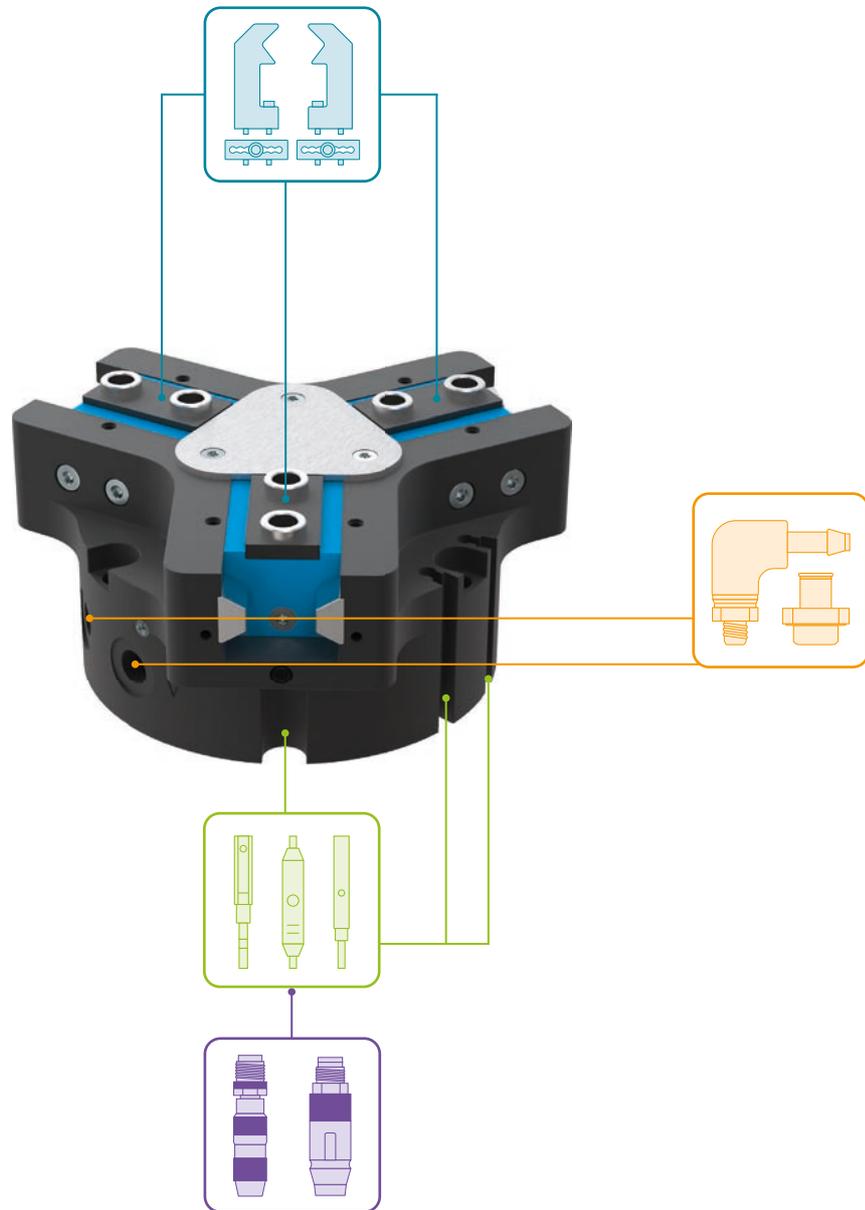

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

036784

## ▶ RECOMMENDED ACCESSORIES



### ENERGY SUPPLY



**GV1-4X8**  
Straight Fittings - Quick Connect Style



**WV1-4X8**  
Angled Fittings - Quick Connect Style



**DSV1-4**  
Pressure safety valve



**DSV1-4E**  
Pressure safety valve with quick exhaust



### SENSORS



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8



**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)



**S8-G-3**  
Plug-in connector customizable Straight - Connector M8

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000IL

### ▶ PRODUCT ADVANTAGES



IO-Link

#### “The hybrid”

- ▶ Pneumatic drive combined with IO-Link technology
- ▶ Up to 50% reduction in cycle times and up to 90% less compressed air usage
- ▶ Connection over just one pneumatic line and IO-Link cable
- ▶ Integrated valve technology, sensor technology, status display, pressure monitoring and temperature monitoring
- ▶ Part detection down to +/- 0.05 mm for a tolerance range that can be taught for any value
- ▶ 32 workpieces data sets can be programmed
- ▶ Protected from corrosion and sealed in accordance with IP64
- ▶ Up to 30 million cycles without maintenance




reddot design award  
winner 2018

### ▶ SERIES CHARACTERISTICS

Installation size	Version						
	GPD50XXIL	N	NC	NO	S	SC	SO
IO-Link	•	•	•	•	•	•	•
Spring closing C		•				•	
Spring opening O				•			•
High-strength S					•	•	•
30 million maintenance-free cycles (max.)	•	•	•	•	•	•	•
Integrated sensing	•	•	•	•	•	•	•
Integrated valve technology	•	•	•	•	•	•	•
Protected against corrosion	•	•	•	•	•	•	•
Purged air	•	•	•	•	•	•	•
IP64	•	•	•	•	•	•	•



## ► BENEFITS IN DETAIL

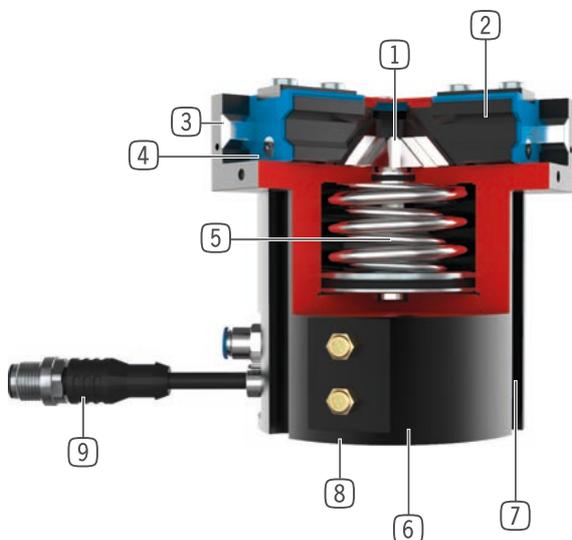

- ① **Wedge hook mechanism**
  - high forces and moments capacity
  - Synchronized gripper jaw movement
- ② **Gripper jaw**
  - Gripper fingers mounted using removable centering sleeves
  - Lubricated for life via incorporated lubrication slots
- ③ **Steel Linear Guide**
  - Steel in steel guide
  - Enables use of extremely long gripper fingers
- ④ **Dual lip seal**
  - IP64
  - Prevents grease from being squeezed out, increasing service life
- ⑤ **Integrated gripping force safety device**
  - Spring built into cylinder chamber as an energy store
- ⑥ **Mounting and positioning**
  - Alternatively, on several sides for customized mounting
- ⑦ **Position sensing**
  - integrated Hallsensor
- ⑧ **Integrated valve technology**
  - Activation of the gripper by means of a compressed air supply
- ⑨ **Integrated control module**
  - Single-cable solution via IO-Link
  - Pressure, temperature, position and other parameters are readable

## ► TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GPD5006IL	3 - 6	740 - 2370	0,75 - 0,85	IP64
GPD5008IL	4 - 8	1260 - 3910	1,25 - 1,45	IP64
GPD5010IL	5 - 10	2290 - 7160	2,1 - 2,5	IP64

## ► FURTHER INFORMATION IS AVAILABLE ONLINE




All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000IL FUNCTIONAL DESCRIPTION




### GRIPPING COMPONENTS

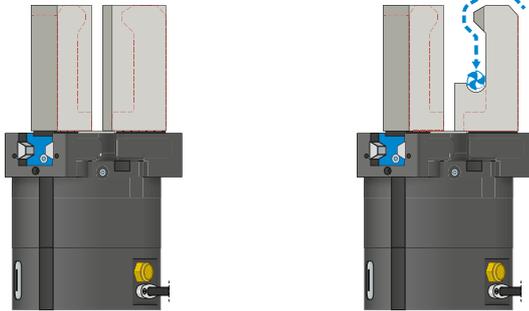

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

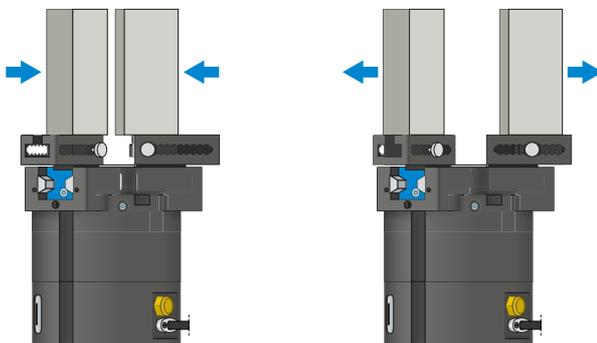

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

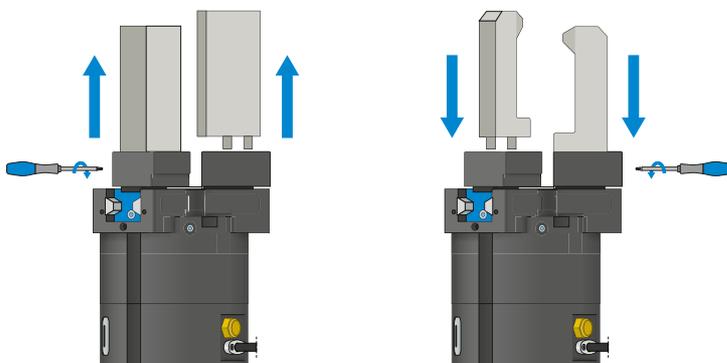

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.




## ENERGY SUPPLY

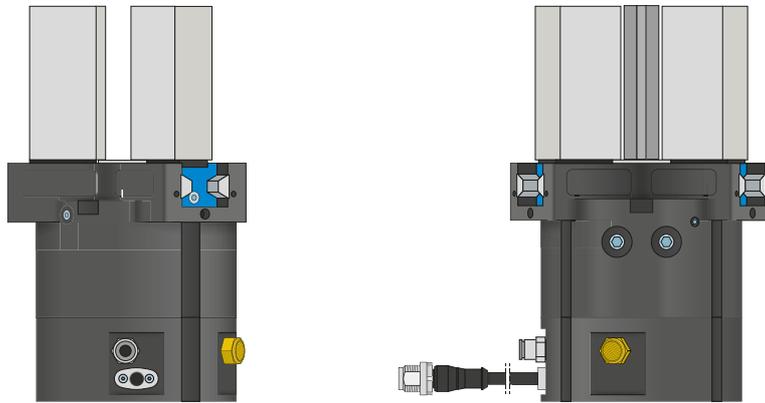

### Pneumatic threaded connections

Available in straight and angled design. Can be chosen freely depending on the space conditions or installation situation.

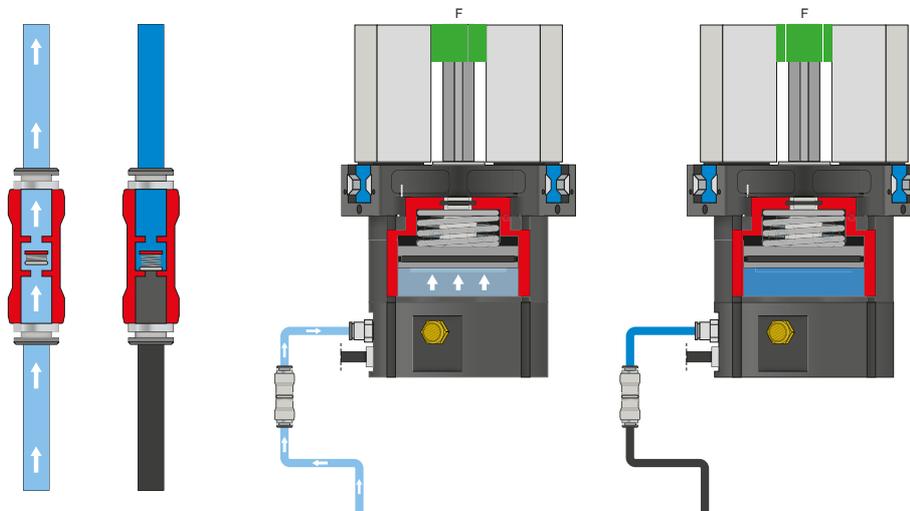

### Pressure safety valve – DSV


The throttle check valve integrated into the supply air line retains the system pressure in case of EMERGENCY STOP. To ensure the function, the valve must be installed as close to the gripper's air connection as possible. Control voltage and actuator voltage must be maintained for this purpose.

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GPD5000IL FUNCTIONAL DESCRIPTION



### CONNECTIONS / OTHER

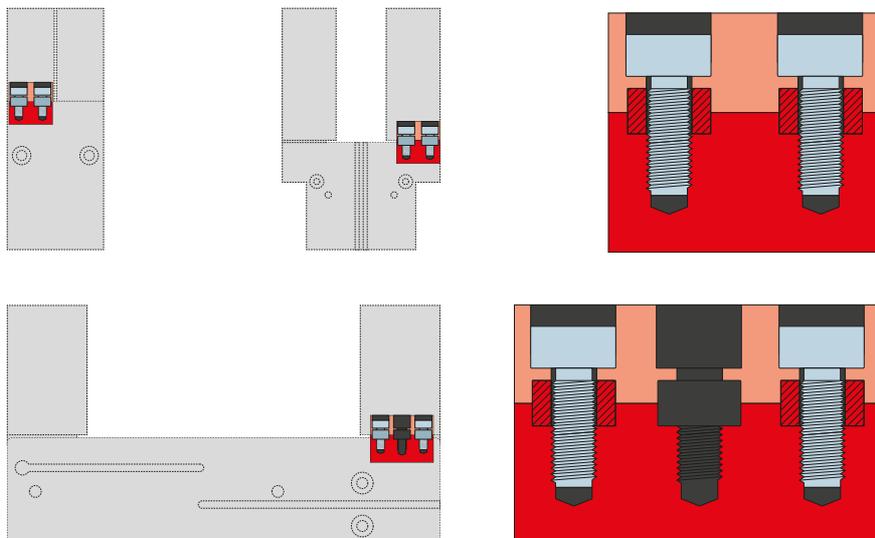

#### Centering sleeves

##### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.




# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5006IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

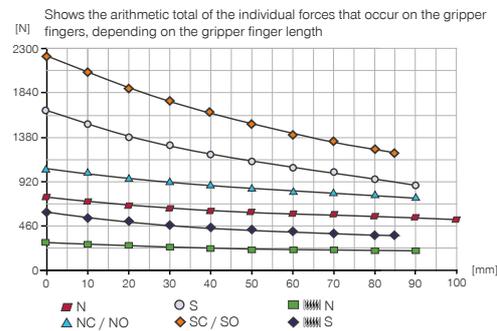

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250


### ▶ TECHNICAL DATA

#### ▶ Technical data


Order no.	GPD5006N-IL-10-A	GPD5006NC-IL-10-A	GPD5006NO-IL-10-A	GPD5006S-IL-10-A	GPD5006SC-IL-10-A	GPD5006SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	6	6	6	3	3	3
Gripping force in closing [N]	740	1020		1620	2240	
Gripping force in opening [N]	800		1080	1750		2370
Gripping force secured by spring min. [N]		280	280		620	620
Cycle count max. [cycle/min]	330	230	230	330	230	230
Permissible weight per jaw max [kg]	0.4	0.4	0.4	0.4	0.4	0.4
Length of the gripper fingers max. [mm]	100	90	90	90	85	85
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	22	43	43	22	43	43
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	0.75	0.85	0.85	0.75	0.85	0.85

## TECHNICAL DRAWINGS

NC / NO / SC / SO

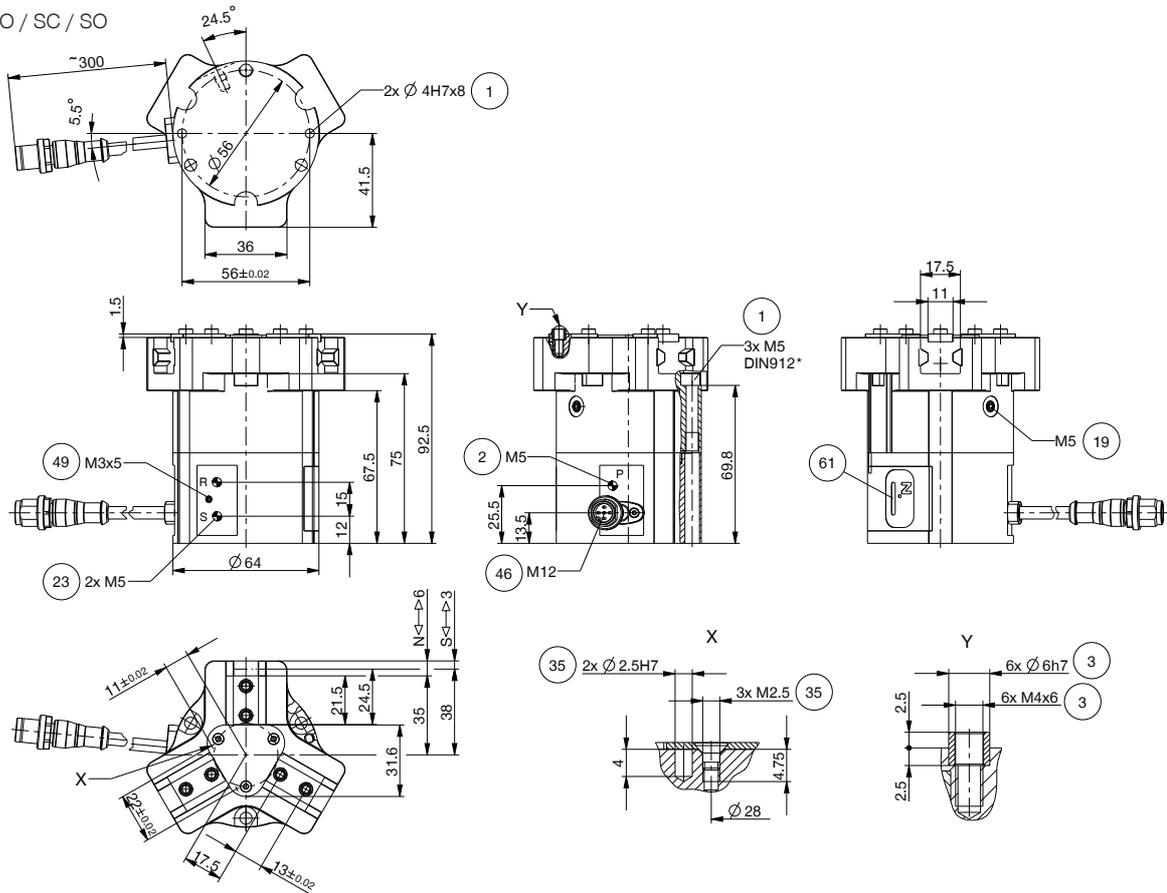

N / S

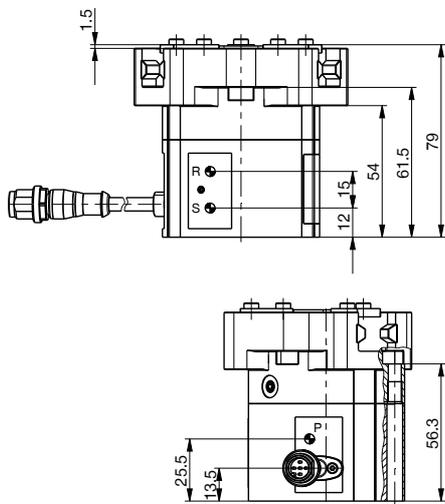


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)
- ㉕ Ground
- ㉖ Status display



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5006IL

### ► ACCESSORIES

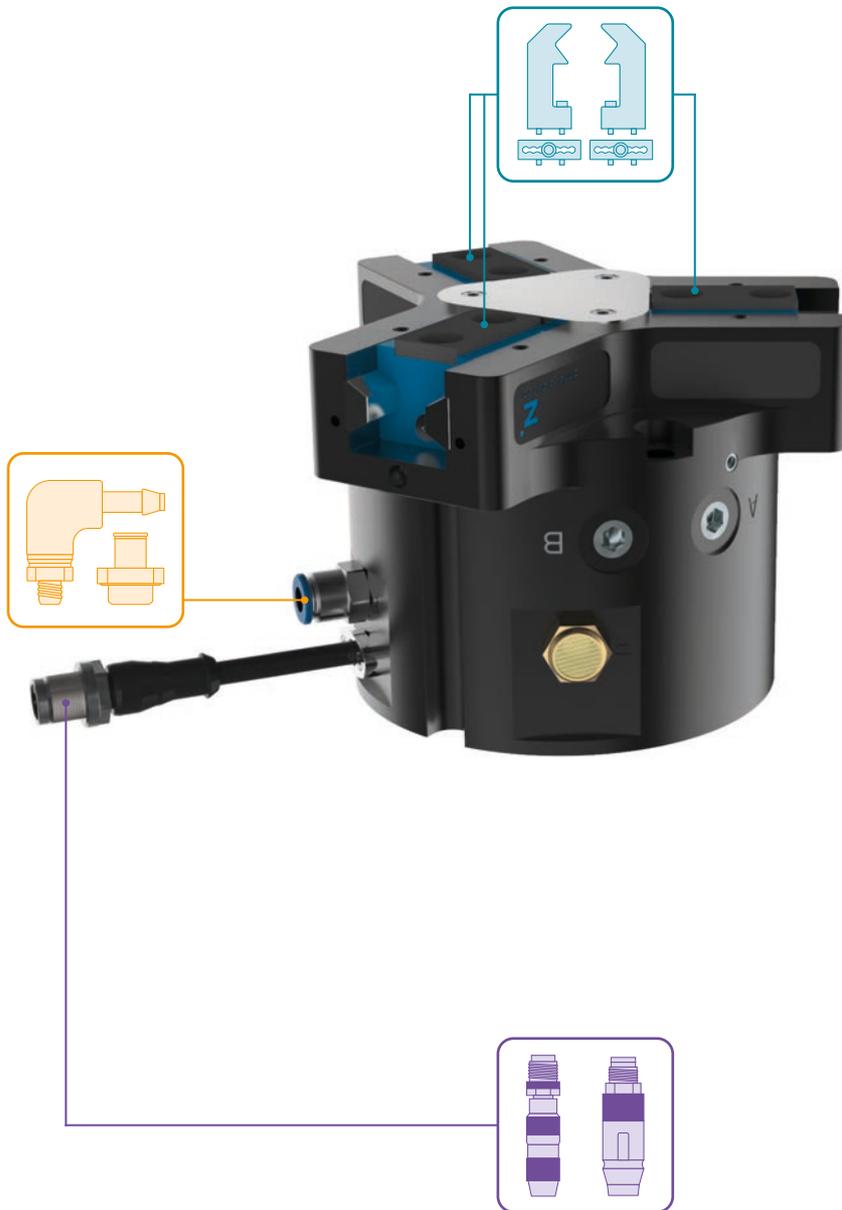

### ► INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024230



2 [piece]  
Filters

CFILT00010

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**DSV06**  
Return valve



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**SCM-C-00-00-A**  
Smart Communication  
Module


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5008IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

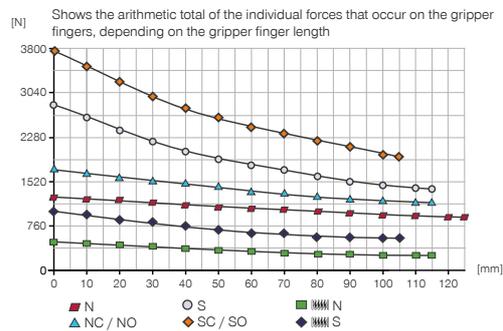

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.





Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

### ▶ TECHNICAL DATA

Order no.	▶ Technical data					
	GPD5008N-IL-10-A	GPD5008NC-IL-10-A	GPD5008NO-IL-10-A	GPD5008S-IL-10-A	GPD5008SC-IL-10-A	GPD5008SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	8	8	8	4	4	4
Gripping force in closing [N]	1260	1690		2780	3730	
Gripping force in opening [N]	1340		1770	2960		3910
Gripping force secured by spring min. [N]		430	430		950	950
Cycle count max. [cycle/min]	210	160	160	210	160	160
Permissible weight per jaw max [kg]	0.7	0.7	0.7	0.7	0.7	0.7
Length of the gripper fingers max. [mm]	125	115	115	115	105	105
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	51	90	90	51	90	90
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	1.25	1.45	1.45	1.25	1.45	1.45

## TECHNICAL DRAWINGS

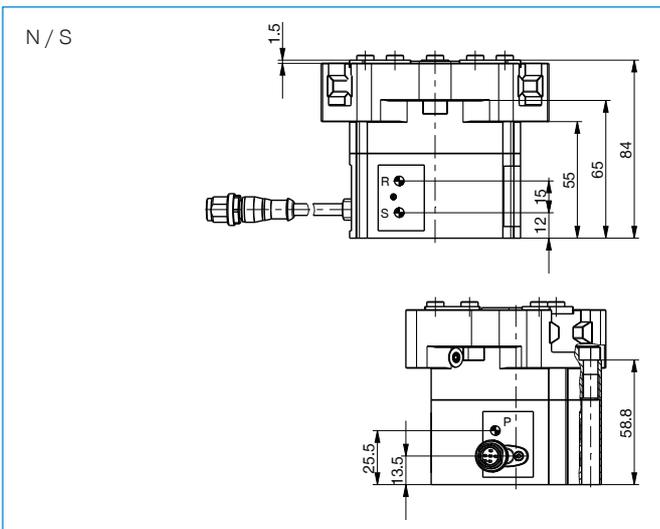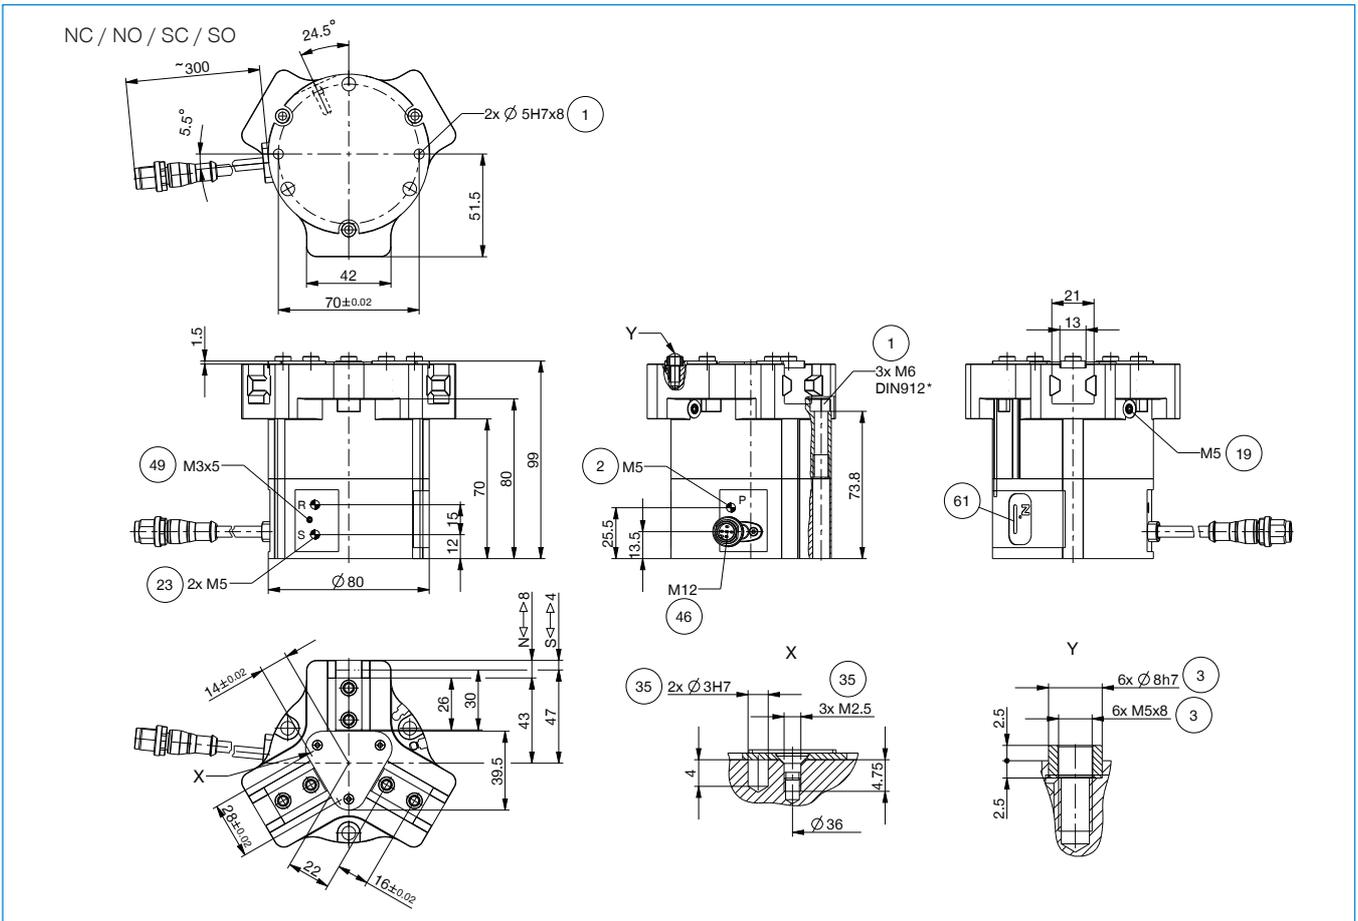


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)
- ㉕ Ground
- ㉖ Status display



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5008IL

### ► ACCESORIES

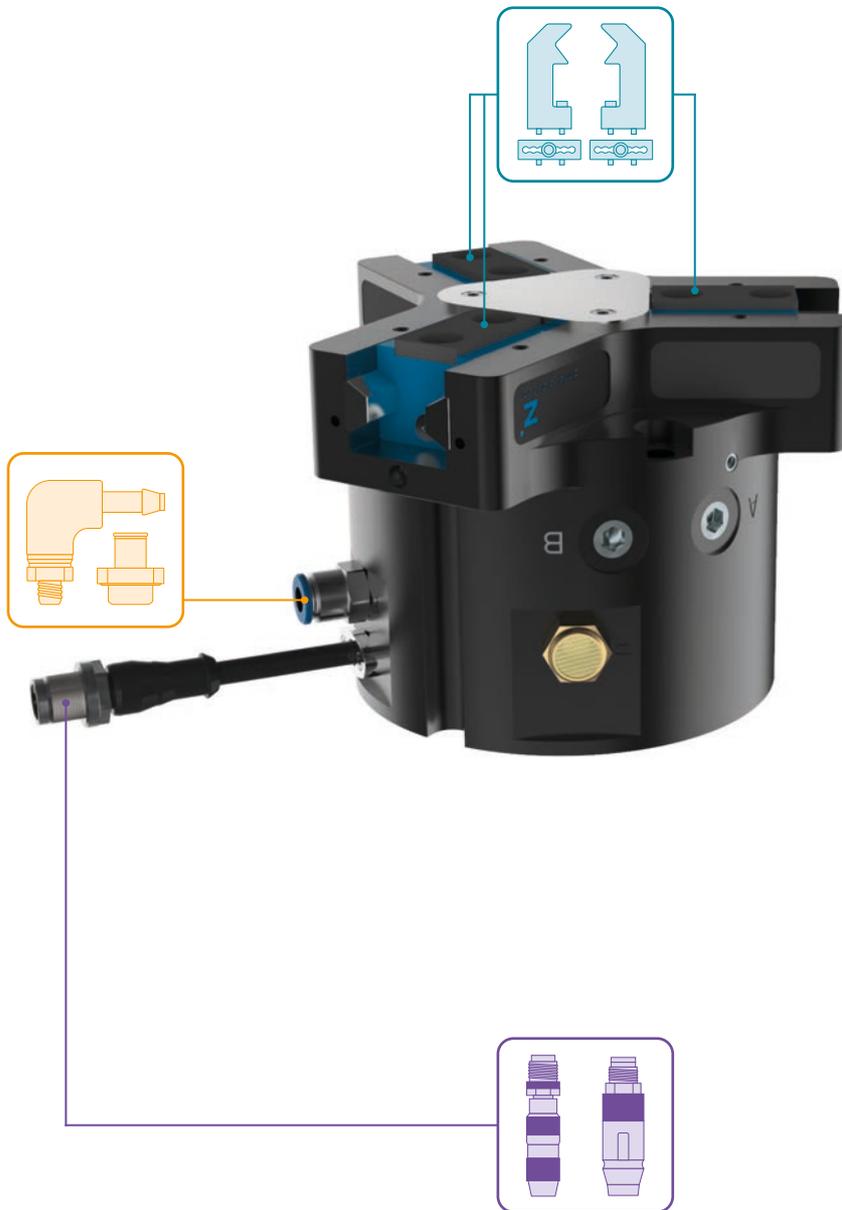

### ► INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231



2 [piece]  
Filters

CFILT00010

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GVM5**  
Straight Fittings - Quick Connect Style



**DSV06**  
Return valve



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**SCM-C-00-00-A**  
Smart Communication  
Module


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5010IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

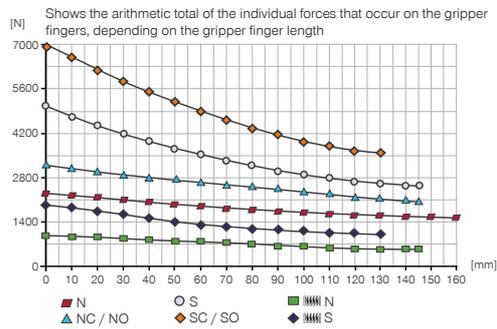

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700


### ▶ TECHNICAL DATA

#### ▶ Technical data


Order no.	GPD5010N-IL-10-A	GPD5010NC-IL-10-A	GPD5010NO-IL-10-A	GPD5010S-IL-10-A	GPD5010SC-IL-10-A	GPD5010SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	10	10	10	5	5	5
Gripping force in closing [N]	2290	3140		5050	6930	
Gripping force in opening [N]	2400		3250	5280		7160
Gripping force secured by spring min. [N]		850	850		1880	1880
Cycle count max. [cycle/min]	130	100	100	130	100	100
Permissible weight per jaw max [kg]	1.3	1.3	1.3	1.3	1.3	1.3
Length of the gripper fingers max. [mm]	160	145	145	145	130	130
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	100	200	200	100	200	200
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.10	0.10	0.10	0.10	0.10	0.10
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	2.1	2.5	2.5	2.1	2.5	2.5

## TECHNICAL DRAWINGS

NC / NO / SC / SO

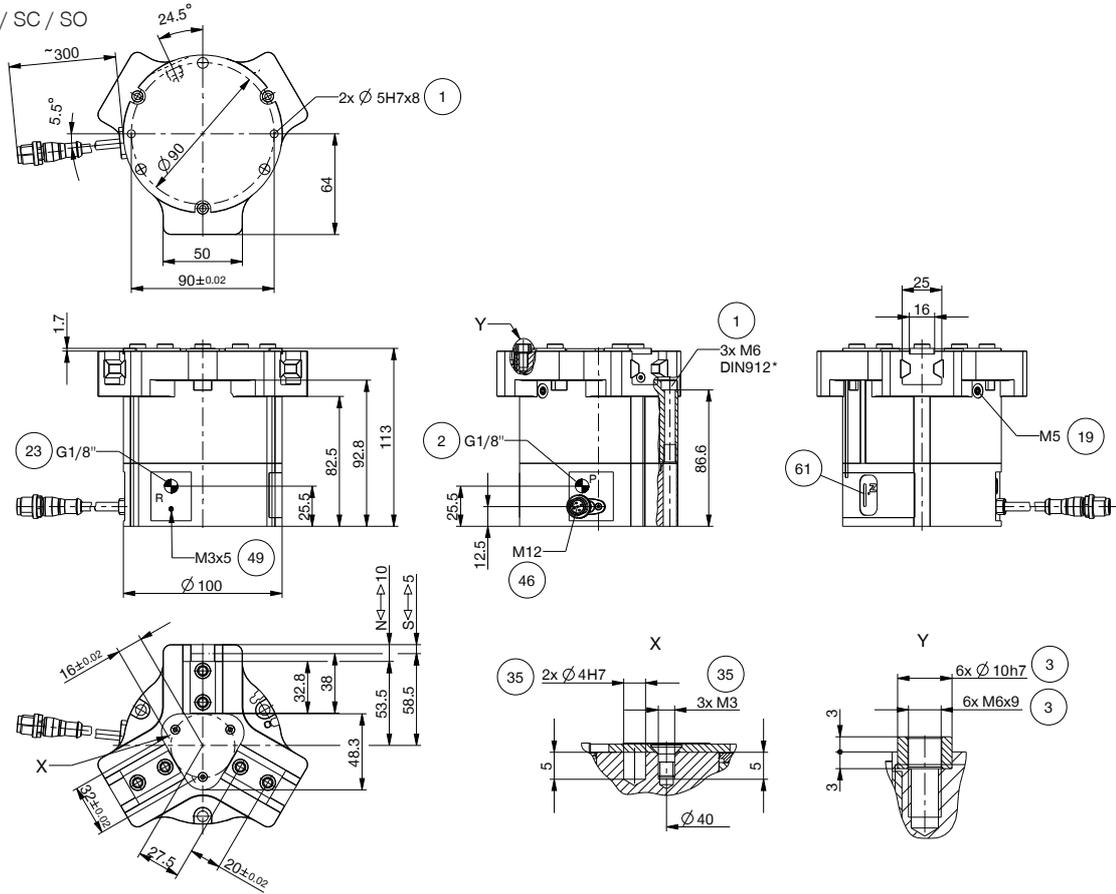

N / S

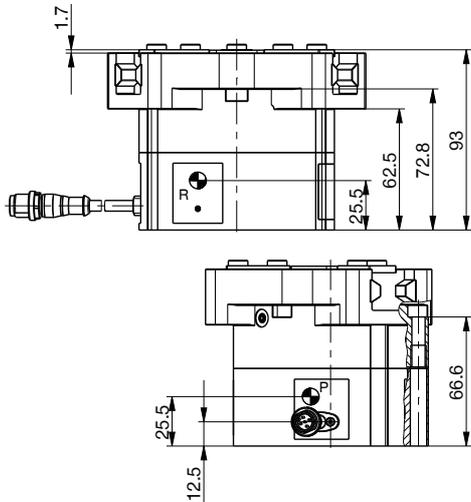

- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑲ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ⑳ Attachment option for customer-specific fittings
- ㉑ Energy supply IO-Link (M12, 5-pole)
- ㉒ Ground
- ㉓ Status display



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5010IL

### ► ACCESSORIES



### ► INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187



1 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**SCM-C-00-00-A**  
Smart Communication  
Module


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5013IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

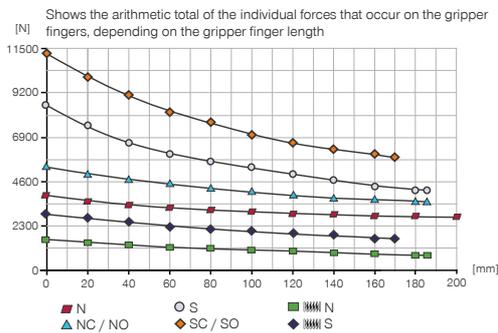

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	110
Mx [Nm]	150
My [Nm]	130
Fa [N]	3300

### ▶ TECHNICAL DATA


Order no.	▶ Technical data					
	GPD5013N-IL-10-A	GPD5013NC-IL-10-A	GPD5013NO-IL-10-A	GPD5013S-IL-10-A	GPD5013SC-IL-10-A	GPD5013SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	13	13	13	6	6	6
Gripping force in closing [N]	3770	5060		8310	11160	
Gripping force in opening [N]	3910		5200	8600		11450
Gripping force secured by spring min. [N]		1290	1290		2850	2850
Permissible weight per jaw max [kg]	2.4	2.4	2.4	2.4	2.4	2.4
Length of the gripper fingers max. [mm]	200	185	185	185	170	170
Repetition accuracy +/- [mm]	0.01	0.01	0.01	0.01	0.01	0.01
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	230	415	415	230	415	415
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	4.4	5.3	5.3	4.6	5.3	5.3



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5013IL

### ► ACCESORIES

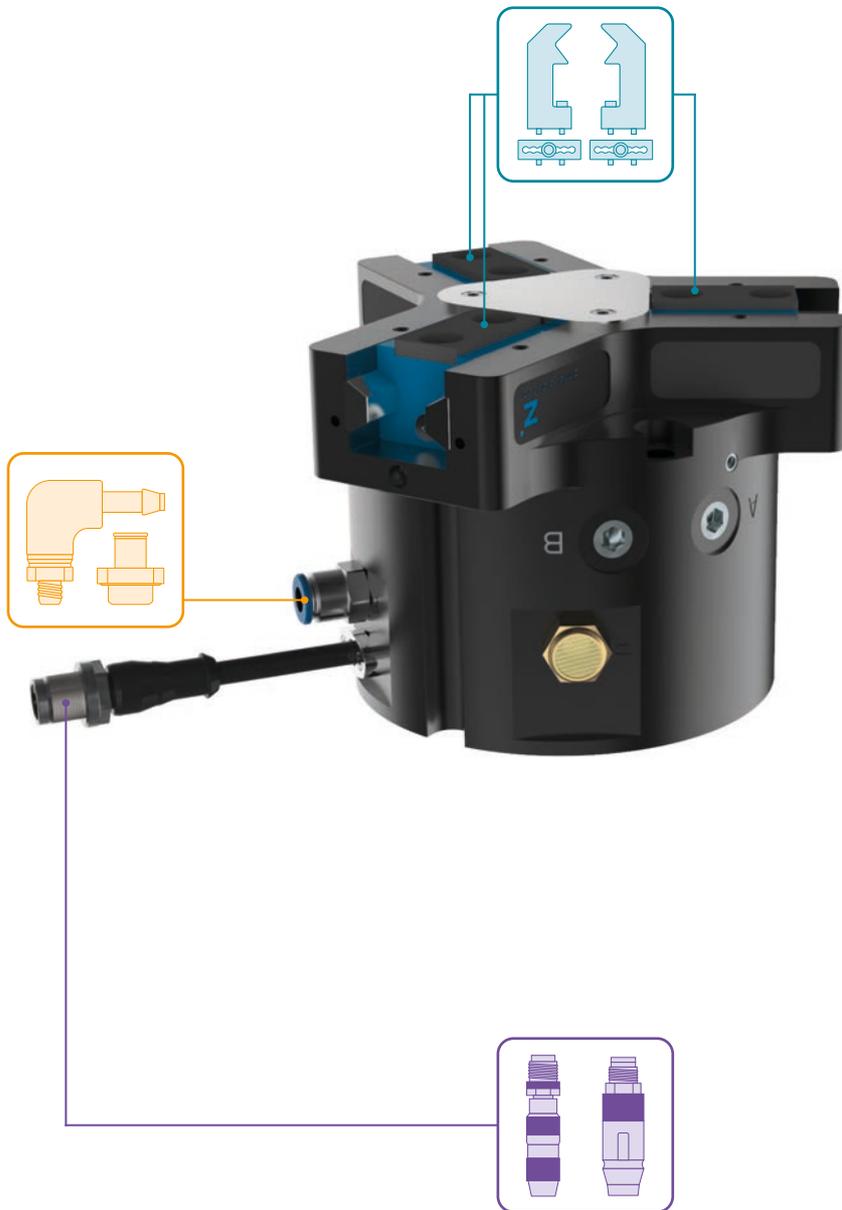

### ► INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5013AL**  
Universal jaw aluminium



**UB5013ST**  
Universal jaw steel



**EB5013AL**  
Aluminum adjustment jaw



**EB5013ST**  
Steel adjustment jaw



**WB5013L**  
Changeable jaw, loose-part-set



**WB5013F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**SCM-C-00-00-A**  
Smart Communication  
Module


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5016IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

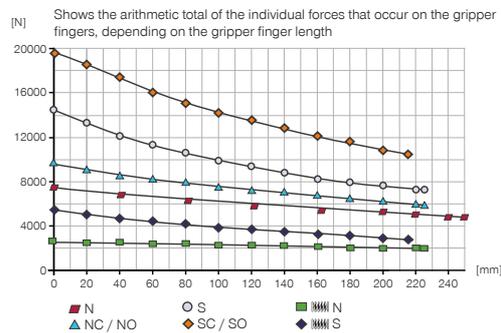

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	145
Mx [Nm]	195
My [Nm]	185
Fa [N]	5200


### ▶ TECHNICAL DATA

#### ▶ Technical data


Order no.	GPD5016N-IL-10-A	GPD5016NC-IL-10-A	GPD5016NO-IL-10-A	GPD5016S-IL-10-A	GPD5016SC-IL-10-A	GPD5016SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	16	16	16	8	8	8
Gripping force in closing [N]	6870	9240		14700	19780	
Gripping force in opening [N]	7120		9490	15250		20330
Gripping force secured by spring min. [N]		2370	2370		5080	5080
Permissible weight per jaw max [kg]	3.8	3.8	3.8	3.8	3.8	3.8
Length of the gripper fingers max. [mm]	245	225	225	225	215	215
Repetition accuracy +/- [mm]	0.02	0.02	0.02	0.02	0.02	0.02
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	525	925	925	525	925	925
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	8.3	9.8	9.8	8.3	9.8	9.8

## TECHNICAL DRAWINGS

NC / NO / SC / SO

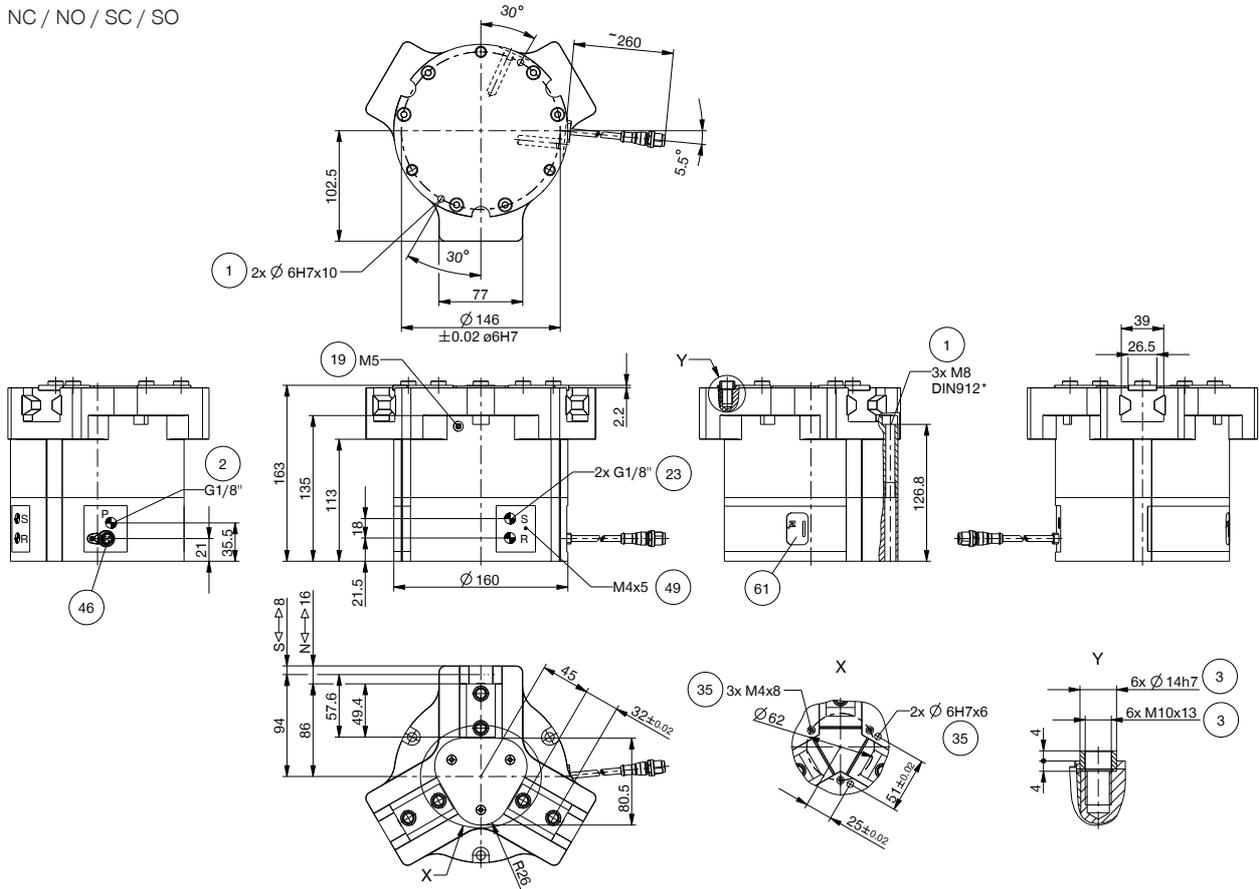

N / S

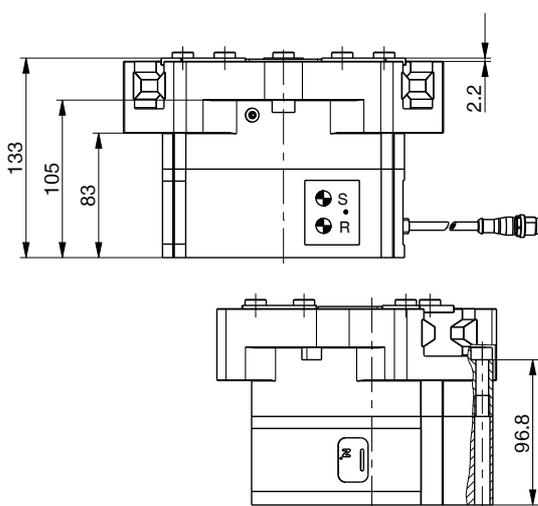


- ① Gripper attachment
- ② Energy supply
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Ventilation (R+S: In dirty environments, replace filters with actual exhaust hoses and move the exhaust air outlet to a clean environment)
- ㉓ Attachment option for customer-specific fittings
- ④⑥ Energy supply IO-Link (M12, 5-pole)
- ④⑨ Ground
- ⑥① Status display



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5016IL

### ► ACCESORIES

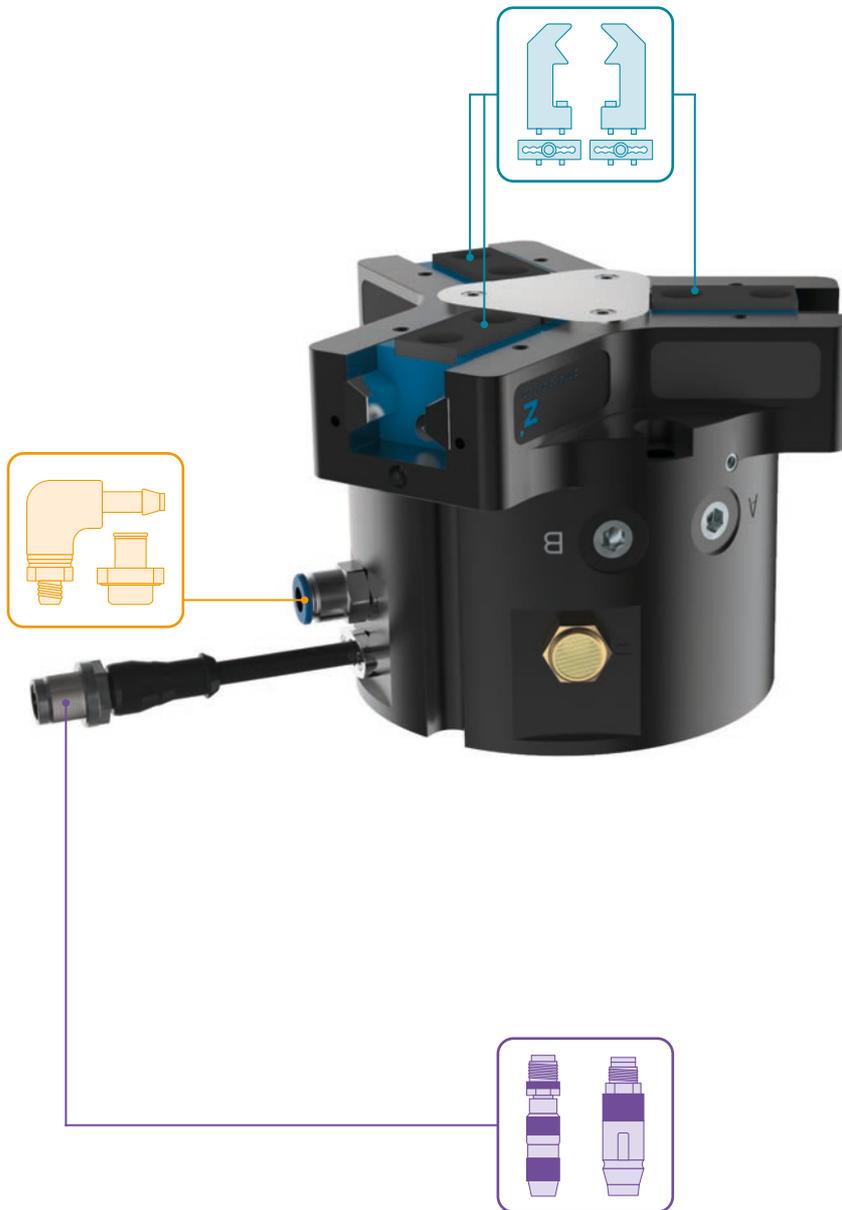

### ► INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

019387



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5016AL**  
Universal jaw aluminium



**UB5016ST**  
Universal jaw steel



**EB5016AL**  
Aluminum adjustment jaw



**EB5016ST**  
Steel adjustment jaw



**WB5016L**  
Changeable jaw, loose-part-set



**WB5016F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**SCM-C-00-00-A**  
Smart Communication  
Module


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5025IL

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

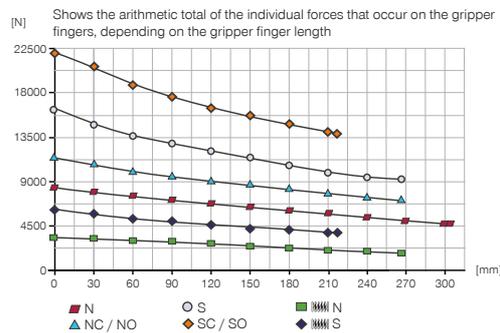

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	180
Mx [Nm]	205
My [Nm]	225
Fa [N]	7500

### ▶ TECHNICAL DATA

#### ▶ Technical data


Order no.	GPD5025N-IL-10-A	GPD5025NC-IL-10-A	GPD5025NO-IL-10-A	GPD5025S-IL-10-A	GPD5025SC-IL-10-A	GPD5025SO-IL-10-A
Control	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link	IO-Link
Stroke per jaw [mm]	25	25	25	14	14	14
Gripping force in closing [N]	8430	11560		16240	22270	
Gripping force in opening [N]	8730		11860	16820		22850
Gripping force secured by spring min. [N]		3130	3130		6030	6030
Permissible weight per jaw max [kg]	7	7	7	7	7	7
Length of the gripper fingers max. [mm]	310	265	265	265	220	220
Repetition accuracy +/- [mm]	0.05	0.05	0.05	0.05	0.05	0.05
Operating pressure min. [bar]	3	4	4	3	4	4
Operating pressure max. [bar]	8	7	7	8	7	7
Nominal operating pressure [bar]	6	6	6	6	6	6
Operating temperature [°C]	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50	+5 ... +50
Air volume per cycle [cm³]	1025	1750	1750	1025	1750	1750
Integrated valve technology	Yes	Yes	Yes	Yes	Yes	Yes
Integrated position sensing	Yes	Yes	Yes	Yes	Yes	Yes
Voltage [V]	24	24	24	24	24	24
Current consumption max. [A]	0.12	0.12	0.12	0.12	0.12	0.12
Protection to IEC 60529	IP64	IP64	IP64	IP64	IP64	IP64
Weight [kg]	14.9	18.6	18.6	14.9	18.6	18.6



# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GPD5025IL

### ▶ ACCESORIES

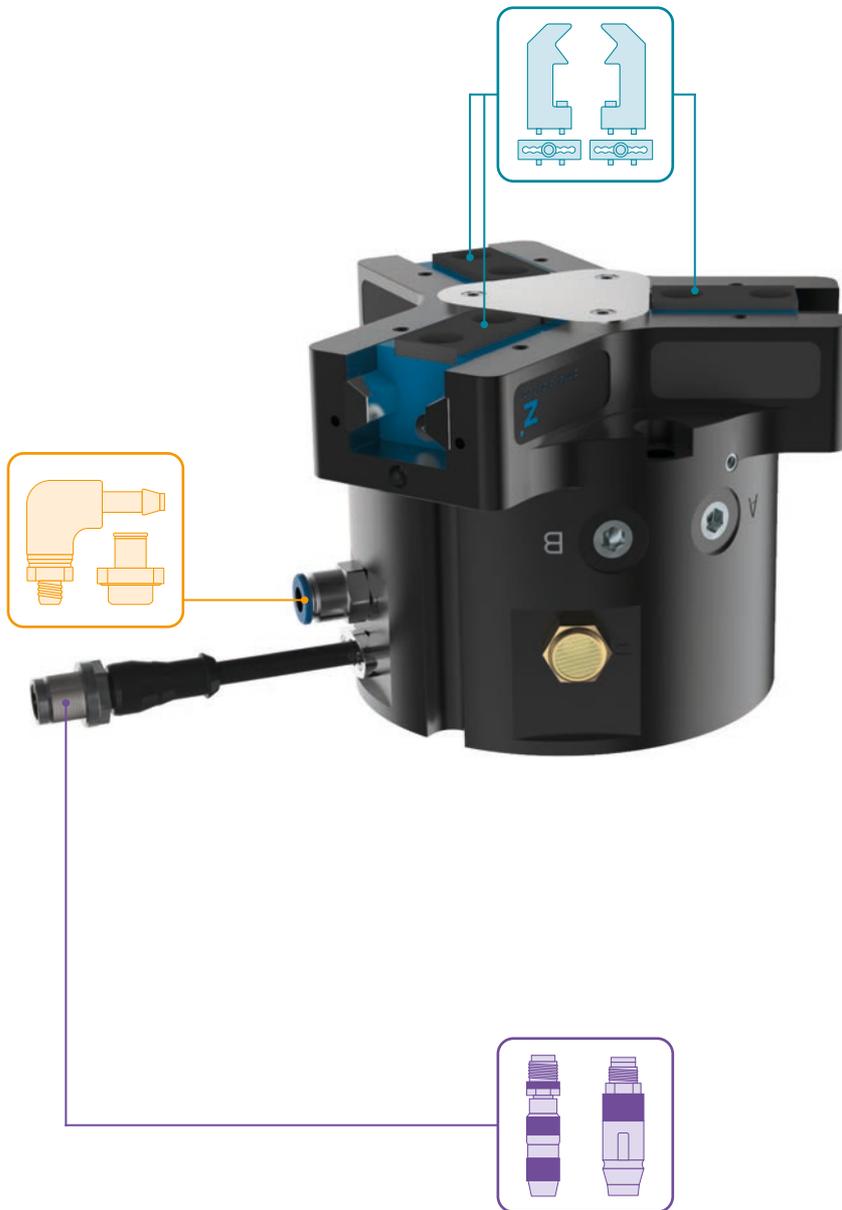

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

030529



2 [piece]  
Filters

CFILT00011

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5025AL**  
Universal jaw aluminium



**UB5025ST**  
Universal jaw steel



**EB5025AL**  
Aluminum adjustment jaw



**EB5025ST**  
Steel adjustment jaw



**WB5025L**  
Changeable jaw, loose-part-set



**WB5025F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**GV1-8X8**  
Straight Fittings - Quick Connect Style



### CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12




**SCM-C-00-00-A**  
Smart Communication  
Module


# SECURED CONFIGURATION EXAMPLES

## GPP5000IL / GPD5000IL SERIES


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (BECKHOFF)

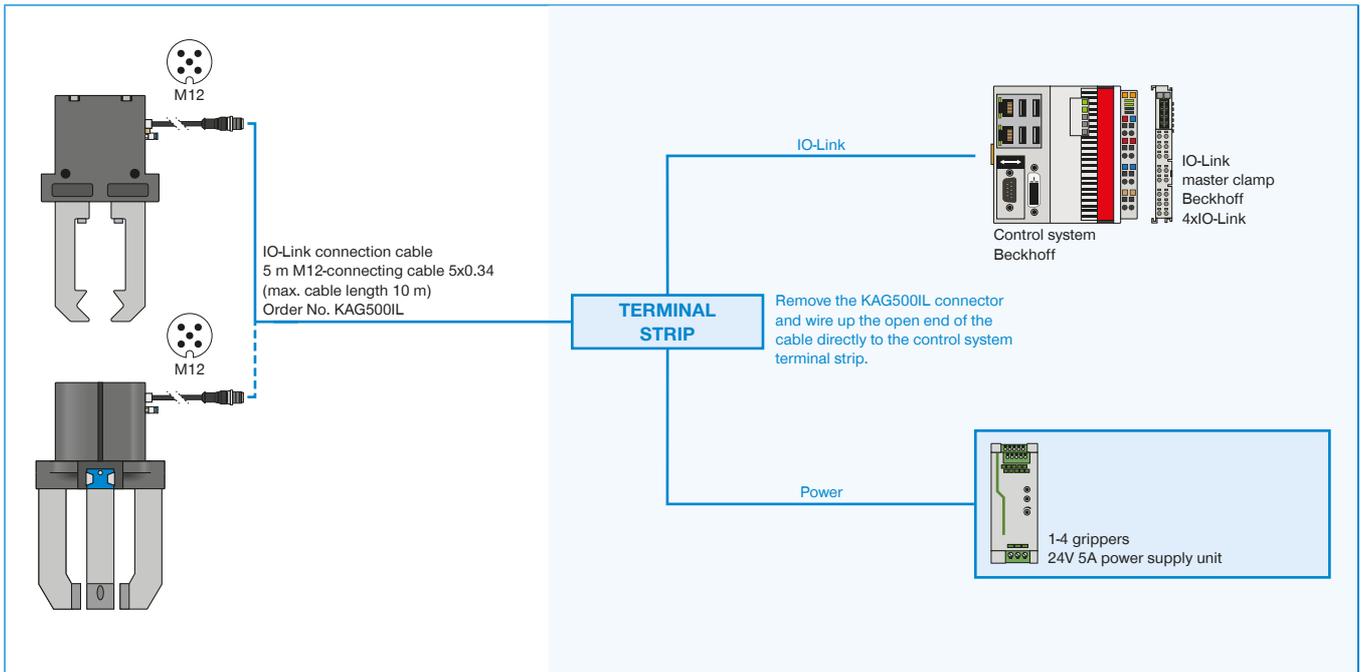


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (SIEMENS)

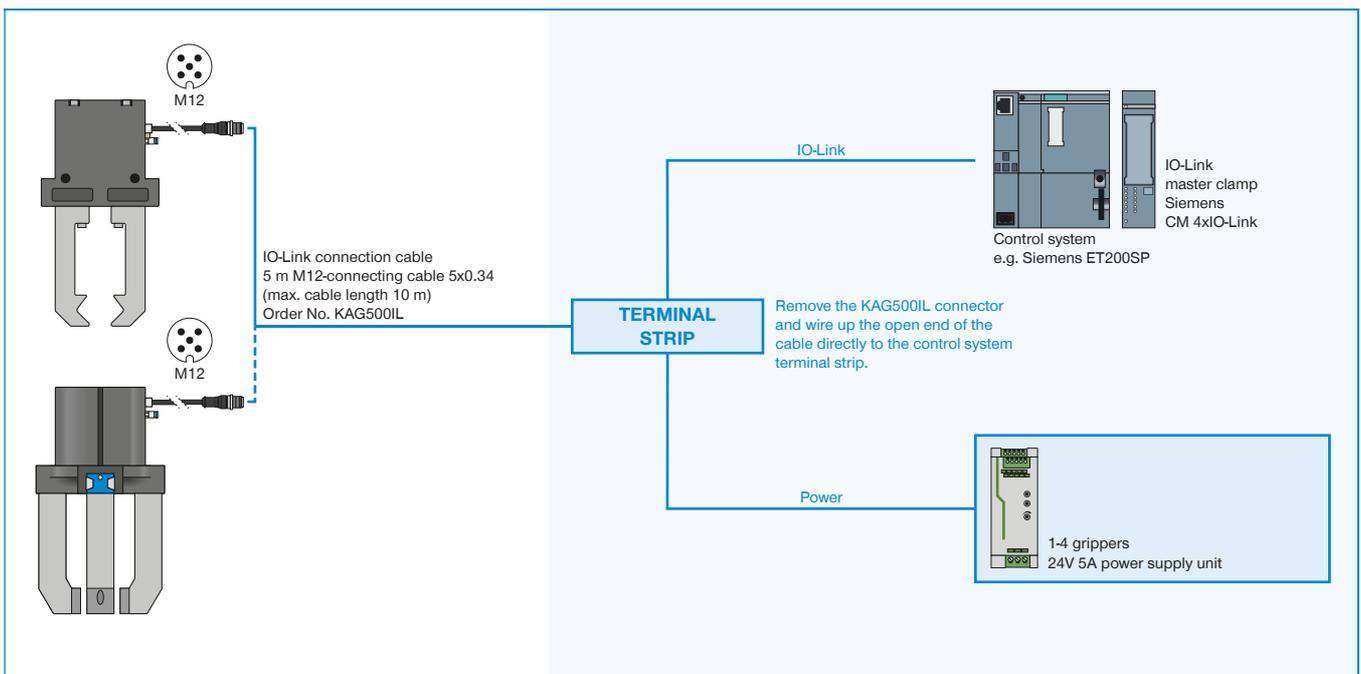

▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

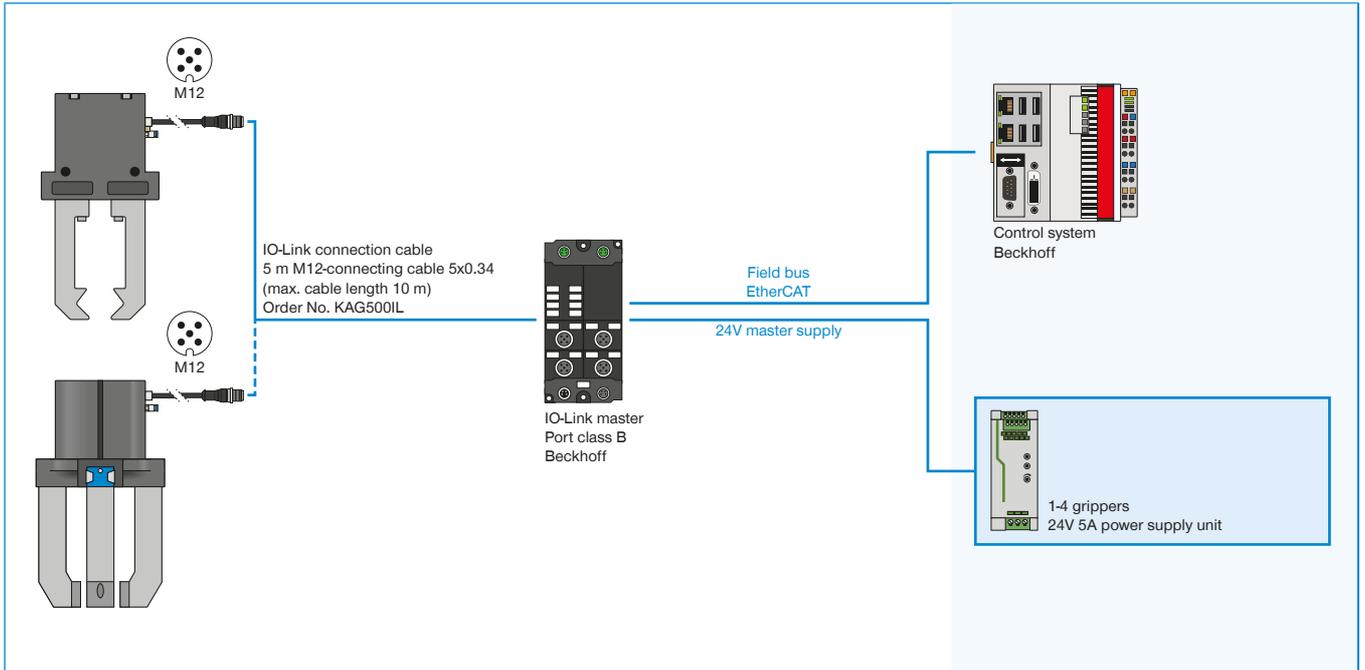

▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (SIEMENS)

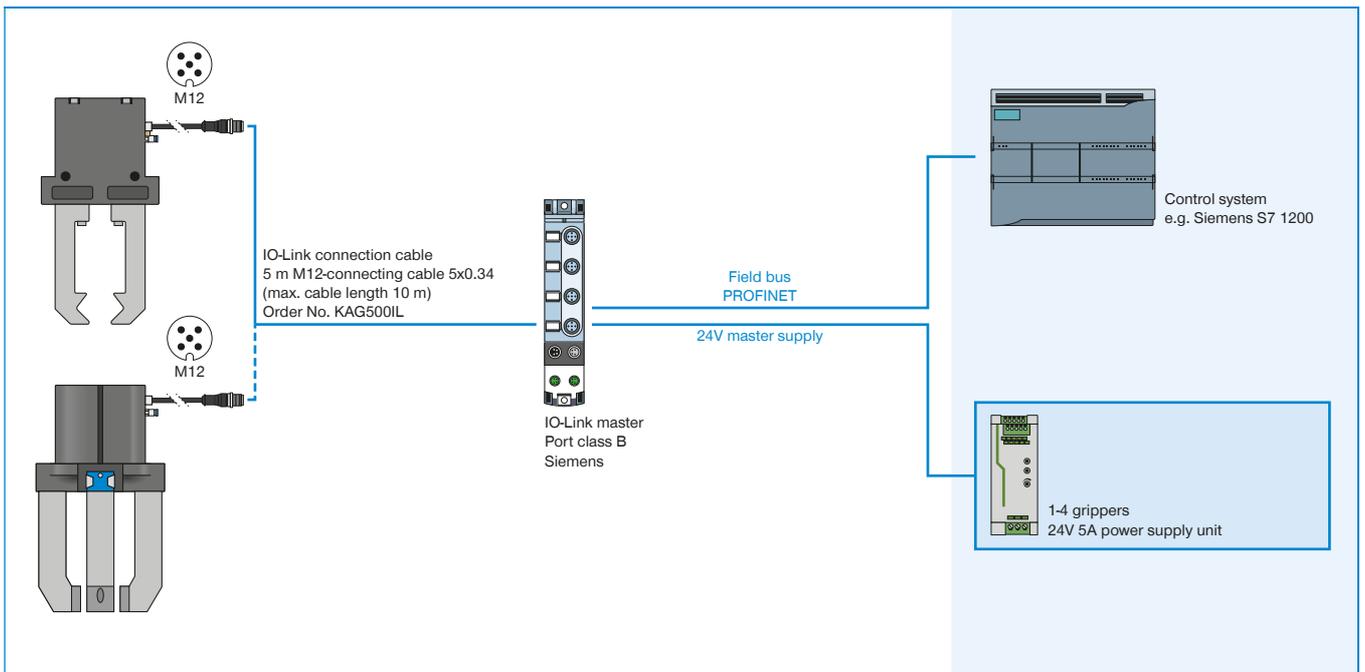

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GED5000

### ▶ PRODUCT ADVANTAGES



#### “ALL in ONE”


- ▶ Approximately the same gripping force as a comparable pneumatic gripper
- ▶ Self locking mechanism in case of power drop
- ▶ Same connection hole patterns as a comparable pneumatic gripper
- ▶ Plug and play – single-cable solution, supports incredibly easy control using I/O signals or IO-Link
- ▶ Integrated ACM control module - option of configuring gripping force, travel time and switching points
- ▶ Protected from corrosion and sealed in accordance with IP64
- ▶ Brushless DC motor – up to 30 million cycles without maintenance

### ▶ SERIES CHARACTERISTICS

Installation size	Variants	
GED50XX	IL-00	IO-00
 IO-Link	●	
 Digital I/O		●
 30 million maintenance-free cycles (max.)	●	●
 Integrated sensing	●	●
 Gripping force adjustable	●	●
 Self locking mechanism	●	●
 Protected against corrosion	●	●
 Purged air	●	●
 IP64	●	●



## BENEFITS IN DETAIL

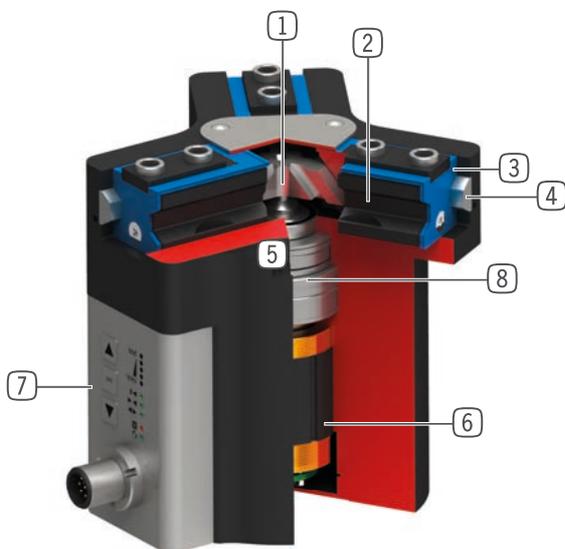

- 1 Wedge hook mechanism**
  - high forces and moments capacity
  - Synchronized gripper jaw movement
- 2 Gripper jaw**
  - Gripper fingers mounted using removable centering sleeves
  - Lubricated for life via incorporated lubrication slots
- 3 Dual lip seal**
  - Enables IP64
  - Prevents grease from being squeezed out, increasing service life
- 4 Steel Linear Guide**
  - Steel in steel guide
  - Enables use of extremely long gripper fingers
- 5 Mounting and positioning**
  - Alternatively, on several sides for customized mounting
  - Pneumatic and electrical versions identical apart from height
- 6 BLDC motor**
  - wear-resistant brushless DC motor
- 7 Advanced control module**
  - Integrated control module with single-cable solution
  - Gripping force, travel time and query programmable via the control panel on the housing
- 8 Drive train**
  - Combination of trapezoidal spindle and gear
  - Durable and robust

## TECHNICAL DATA

Installation size	Stroke per jaw [mm]	Gripping force [N]	Weight [kg]	IP class
GED5006	6	540 - 960	1.09	IP64 *
GED5008	8	650 - 1150	1.66	IP64 *
GED5010	10	980 - 1520	2.33	IP64 *

\*with purged air (max. 0,5 bar)

## FURTHER INFORMATION IS AVAILABLE ONLINE




All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

# 3-JAW CONCENTRIC GRIPPERS

## SERIES GED5000 FUNCTIONAL DESCRIPTION




### GRIPPING COMPONENTS

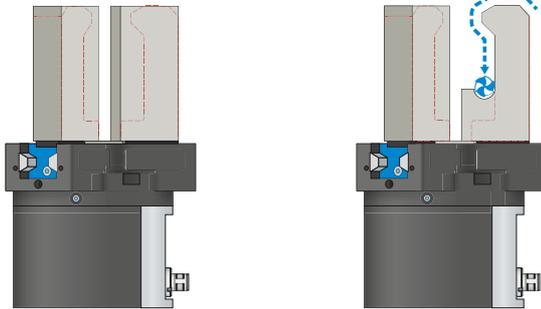

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

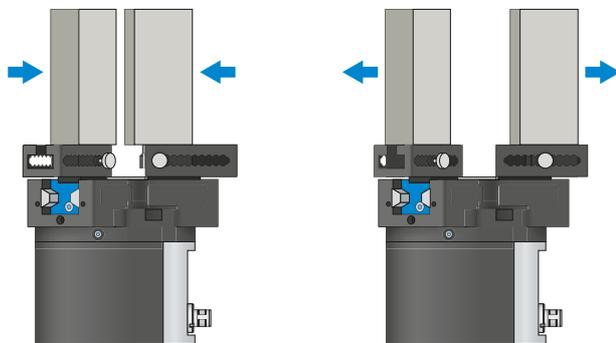

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

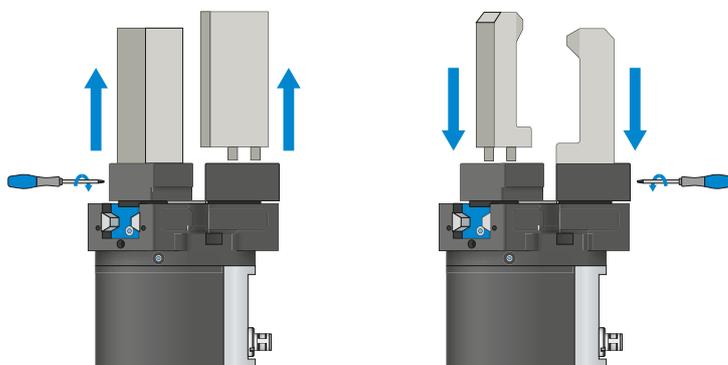

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers

For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.




### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.



## GRIPPING COMPONENTS

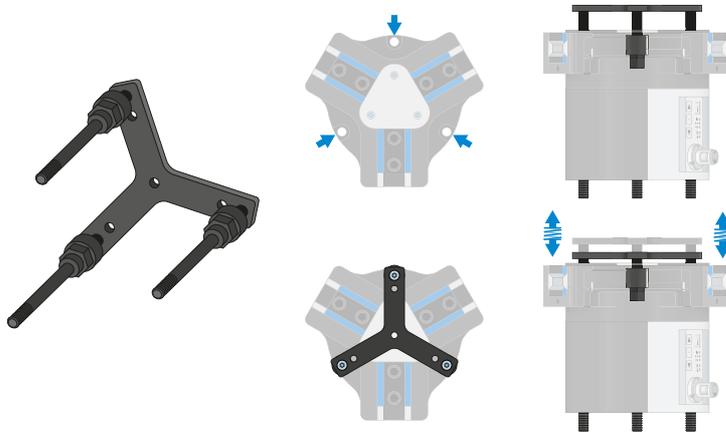


### Pressure piece – ADS5000

When the gripper fingers are open, the pressure piece is used for spring-supported positioning of the workpiece against a limit stop. This greatly reduces the loads on the gripper that arise during joining.



## CONNECTIONS / OTHER

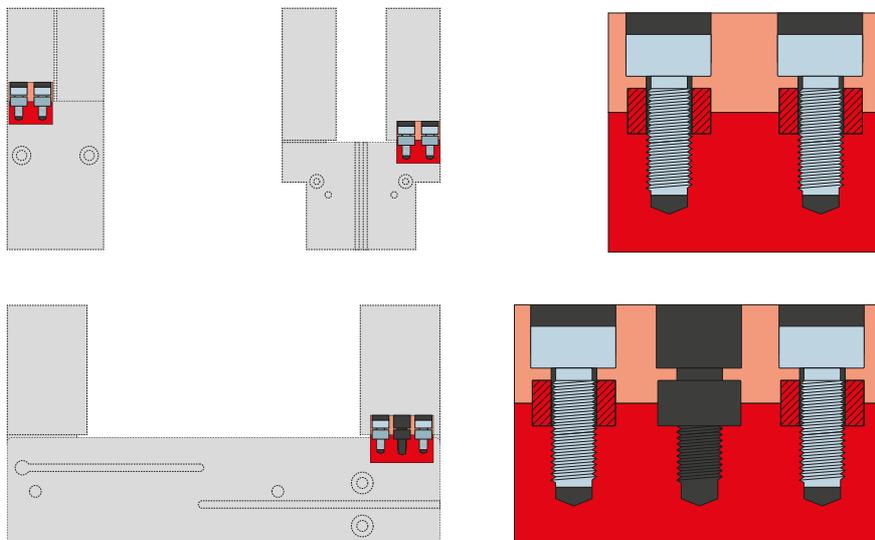

### Centering sleeves

#### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5006

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

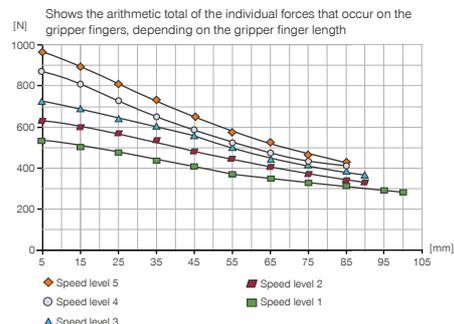

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	43
Mx [Nm]	70
My [Nm]	46
Fa [N]	1250

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GED5006IL-00-A	GED5006IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	6	6
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	0.4	0.4
Length of the gripper fingers max. [mm]	100	100
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	1.09	1.09

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES

Order no.	▶ Technical data - N mode	
	GED5006IL-00-A	GED5006IO-00-A
Gripping force → ← min. / max. [N]	540 / 960	540 / 960
Gripping force  ←→  min. / max. [N]	540 / 960	540 / 960
Travel time → ← min. / max. [s]	0,15 / 0,22	0,15 / 0,22
Travel time  ←→  min. / max. [s]	0,15 / 0,22	0,15 / 0,22








Order no.	▶ Technical data - NC mode	
	GED5006IL-00-A	GED5006IO-00-A
Gripping force → ← min. / max. [N]	540 / 960	540 / 960
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,15 / 0,22	0,15 / 0,22
Travel time  ←→  min. / max. [s]	0,13	0,13

Order no.	▶ Technical data - NO mode	
	GED5006IL-00-A	GED5006IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	540 / 960	540 / 960
Travel time → ← min. / max. [s]	0,13	0,13
Travel time  ←→  min. / max. [s]	0,15 / 0,22	0,15 / 0,22

## TECHNICAL DRAWINGS

- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

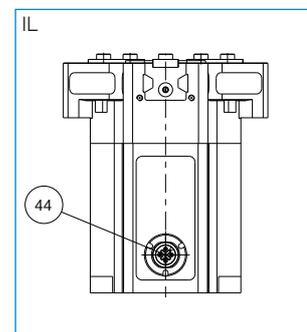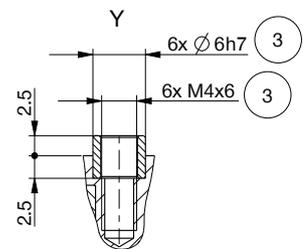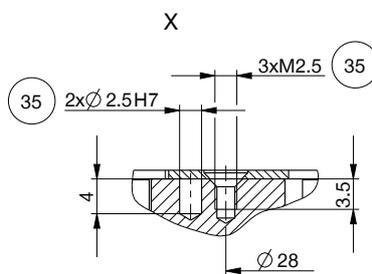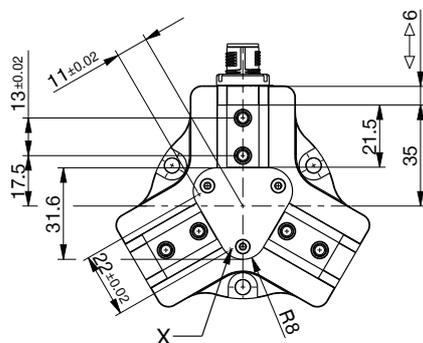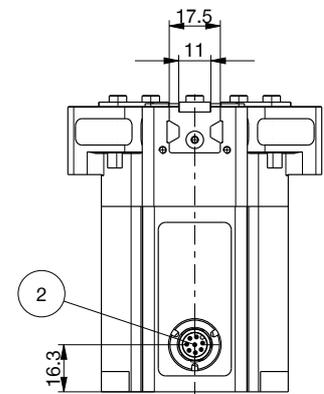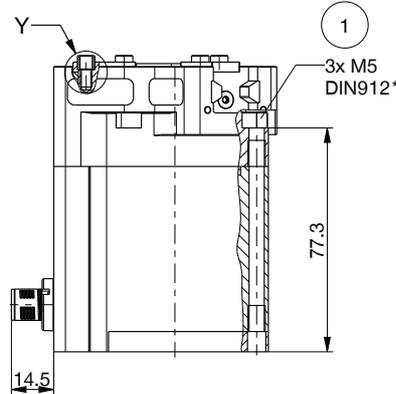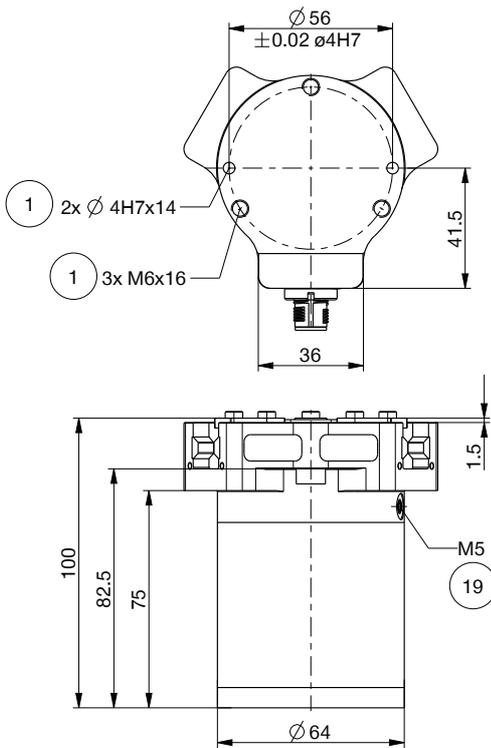

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5006

### ▶ ACCESORIES




### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024230

### ▶ INFRASTRUCTURE IO-LINK

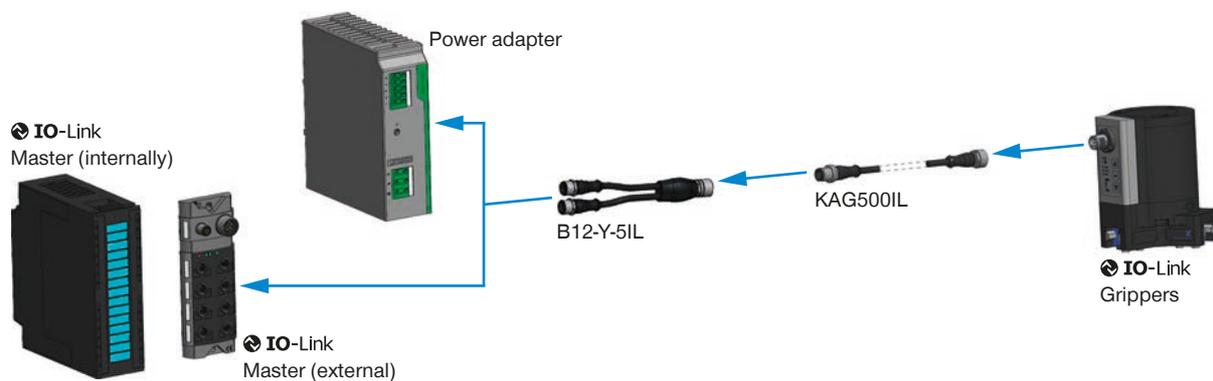

▶ **RECOMMENDED ACCESSORIES**



**GRIPPING COMPONENTS**



**UB5006AL**  
Universal jaw aluminium



**UB5006ST**  
Universal jaw steel



**EB5006AL**  
Aluminum adjustment jaw



**EB5006ST**  
Steel adjustment jaw



**WB5006L**  
Changeable jaw, loose-part-set



**WB5006F**  
Changeable jaw, fix-part



**ADS5006-05**  
Pressure piece

▶ **RECOMMENDED ACCESSORY GED5006IL-00-A**



**CONNECTIONS / OTHER**



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

▶ **RECOMMENDED ACCESSORY GED5006IO-00-A**



**CONNECTIONS / OTHER**



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12



**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5008

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

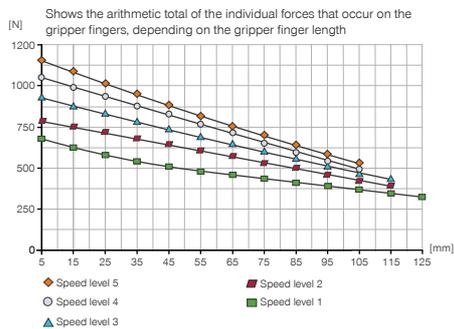

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	60
Mx [Nm]	105
My [Nm]	65
Fa [N]	1900

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GED5008IL-00-A	GED5008IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	8	8
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	0.7	0.7
Length of the gripper fingers max. [mm]	125	125
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	1.66	1.66

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES









Order no.	▶ Technical data - N mode	
	GED5008IL-00-A	GED5008IO-00-A
Gripping force → ← min. / max. [N]	650 / 1150	650 / 1150
Gripping force  ←→  min. / max. [N]	650 / 1150	650 / 1150
Travel time → ← min. / max. [s]	0,18 / 0,29	0,18 / 0,29
Travel time  ←→  min. / max. [s]	0,18 / 0,29	0,18 / 0,29

Order no.	▶ Technical data - NC mode	
	GED5008IL-00-A	GED5008IO-00-A
Gripping force → ← min. / max. [N]	650 / 1150	650 / 1150
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,18 / 0,29	0,18 / 0,29
Travel time  ←→  min. / max. [s]	0,15	0,15

Order no.	▶ Technical data - NO mode	
	GED5008IL-00-A	GED5008IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	650 / 1150	650 / 1150
Travel time → ← min. / max. [s]	0,15	0,15
Travel time  ←→  min. / max. [s]	0,18 / 0,29	0,18 / 0,29

## TECHNICAL DRAWINGS

- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

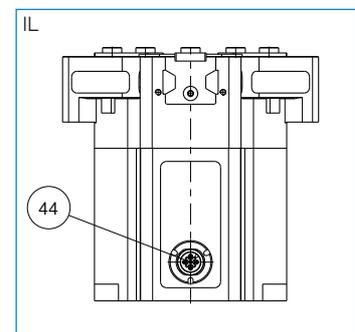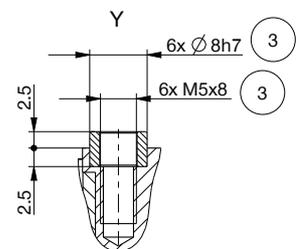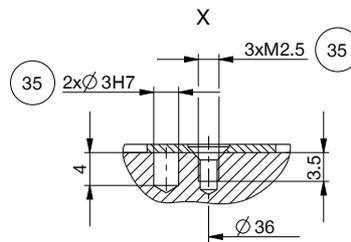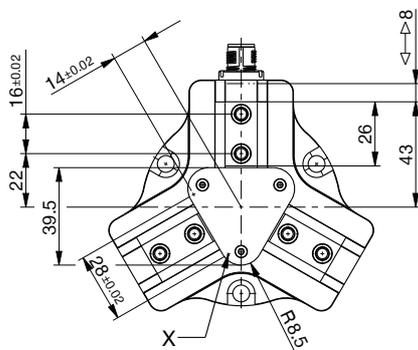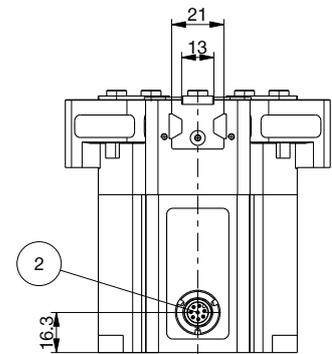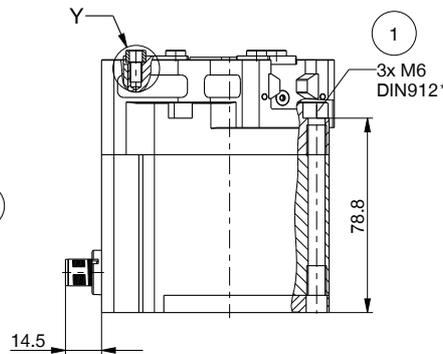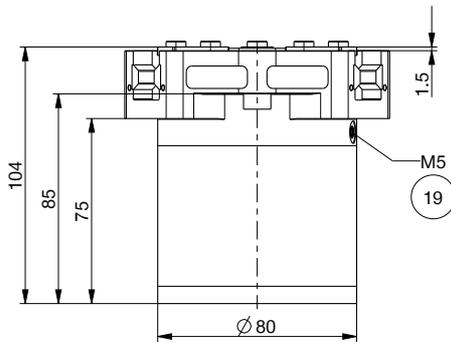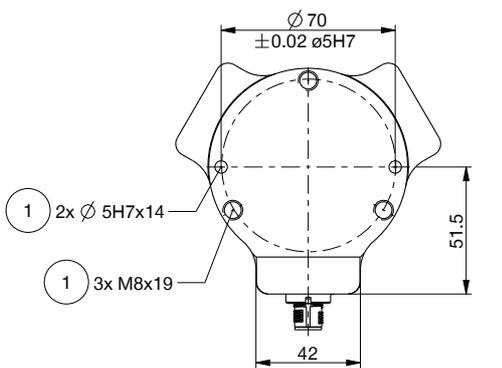

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5008

### ▶ ACCESORIES




### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231

### ▶ INFRASTRUCTURE IO-LINK

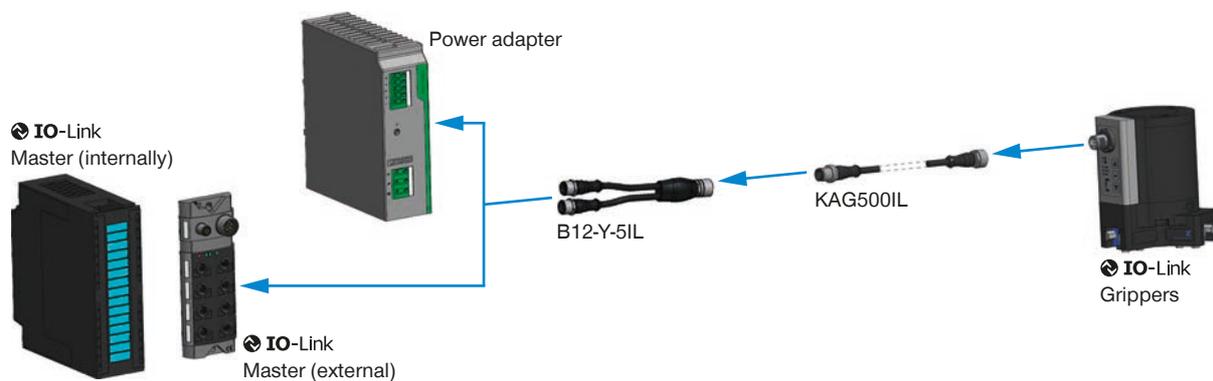

▶ RECOMMENDED ACCESSORIES



GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



**ADS5008-05**  
Pressure piece

▶ RECOMMENDED ACCESSORY GED5008IL-00-A



CONNECTIONS / OTHER



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

▶ RECOMMENDED ACCESSORY GED5008IO-00-A



CONNECTIONS / OTHER



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12



**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5010

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

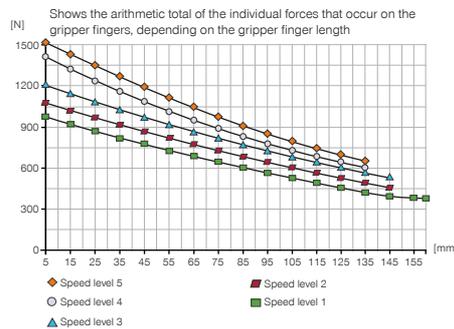

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	75
Mx [Nm]	125
My [Nm]	95
Fa [N]	2700

### ▶ TECHNICAL DATA - BASIC VERSION

Order no.	▶ Technical data	
	GED5010IL-00-A	GED5010IO-00-A
Control	IO-Link	Digital I/O
Drive	BLDC motor	BLDC motor
Stroke per jaw [mm]	10	10
Self locking mechanism	mechanical	mechanical
Control time [s]	0.035	0.035
Permissible weight per jaw max [kg]	1.3	1.3
Length of the gripper fingers max. [mm]	160	160
Repetition accuracy +/- [mm]	0.01	0.01
Operating temperature [°C]	5 ... 50	5 ... 50
Voltage [V]	24	24
Current consumption max. [A]	5	5
Protection to IEC 60529	IP64*	IP64*
Weight [kg]	2.33	2.33

\*with purged air (max. 0,5 bar)

### ▶ TECHNICAL DATA - MODES

Order no.	▶ Technical data - N mode	
	GED5010IL-00-A	GED5010IO-00-A
Gripping force → ← min. / max. [N]	980 / 1520	980 / 1520
Gripping force  ←→  min. / max. [N]	980 / 1520	980 / 1520
Travel time → ← min. / max. [s]	0,21 / 0,32	0,21 / 0,32
Travel time  ←→  min. / max. [s]	0,21 / 0,32	0,21 / 0,32









Order no.	▶ Technical data - NC mode	
	GED5010IL-00-A	GED5010IO-00-A
Gripping force → ← min. / max. [N]	980 / 1520	980 / 1520
Gripping force  ←→  min. / max. [N]	-	-
Travel time → ← min. / max. [s]	0,21 / 0,32	0,21 / 0,32
Travel time  ←→  min. / max. [s]	0,16	0,16

Order no.	▶ Technical data - NO mode	
	GED5010IL-00-A	GED5010IO-00-A
Gripping force → ← min. / max. [N]	-	-
Gripping force  ←→  min. / max. [N]	980 / 1520	980 / 1520
Travel time → ← min. / max. [s]	0,16	0,16
Travel time  ←→  min. / max. [s]	0,21 / 0,32	0,21 / 0,32

## TECHNICAL DRAWINGS


- ① Gripper attachment
- ② Energy supply (M12, 8-pole)
- ③ Fixing for gripper finger
- ⑱ Air purge connection option
- ⑳ Attachment option for customer-specific fittings
- ㉔ Energy supply IO-Link (M12, 5-pole)

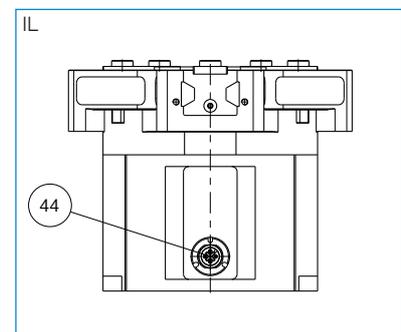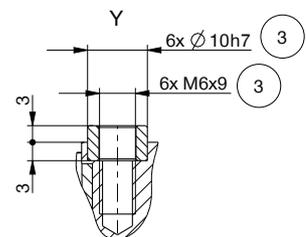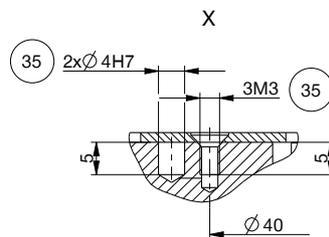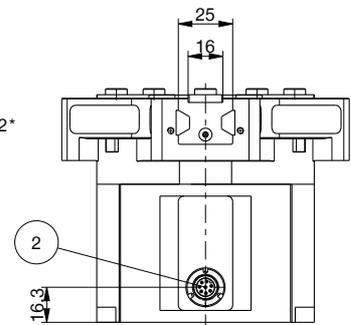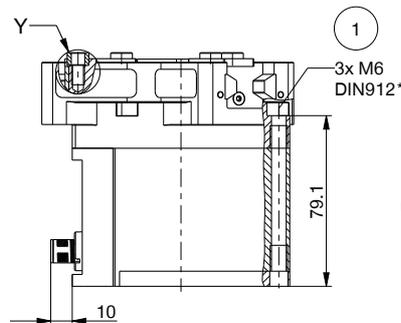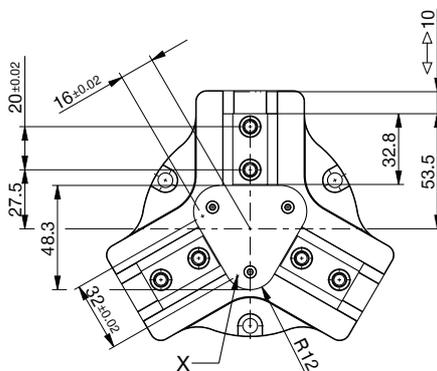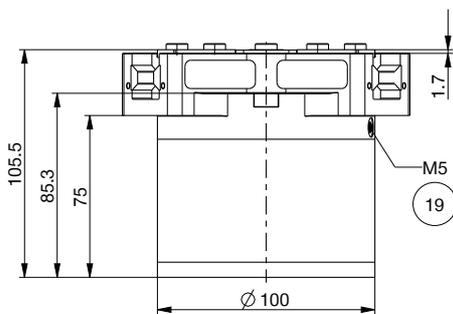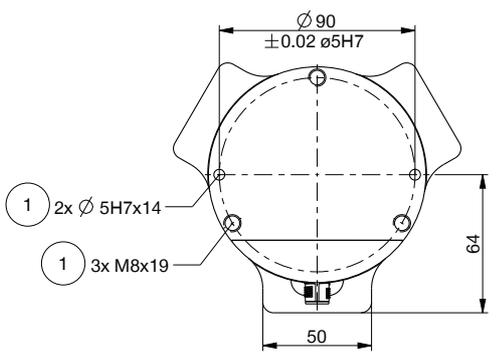

# 3-JAW CONCENTRIC GRIPPERS

## INSTALLATION SIZE GED5010

### ▶ ACCESORIES

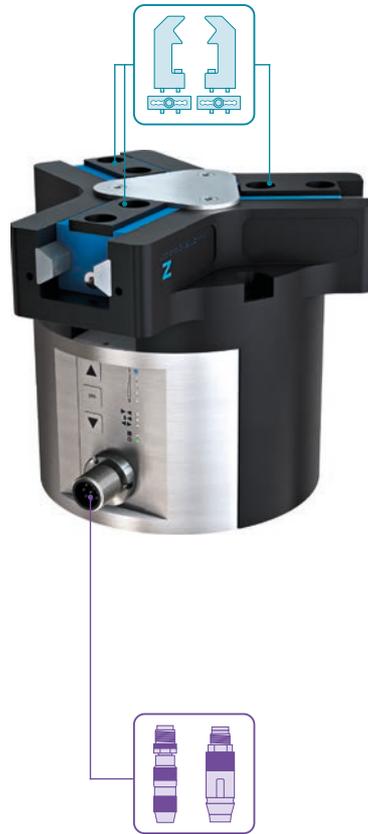


### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

018187

### ▶ INFRASTRUCTURE IO-LINK

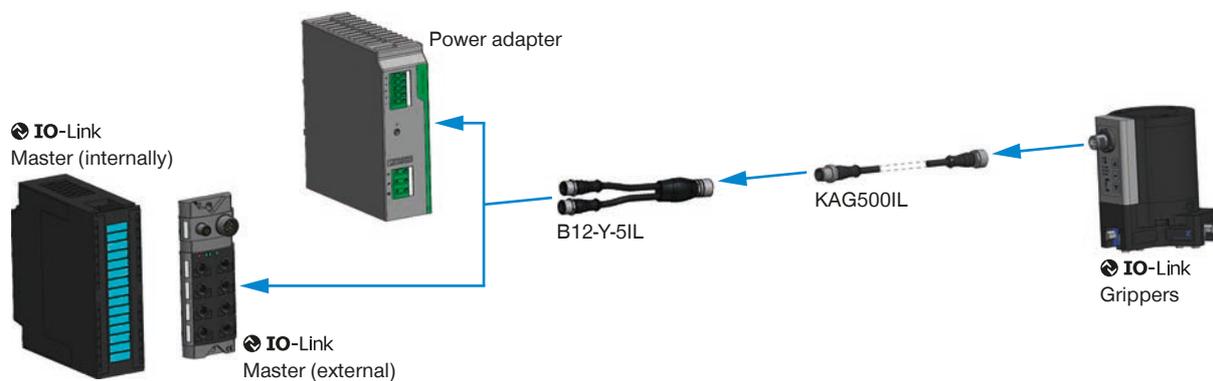

▶ **RECOMMENDED ACCESSORIES**



**GRIPPING COMPONENTS**



**UB5010AL**  
Universal jaw aluminium



**UB5010ST**  
Universal jaw steel



**EB5010AL**  
Aluminum adjustment jaw



**EB5010ST**  
Steel adjustment jaw



**WB5010L**  
Changeable jaw, loose-part-set



**WB5010F**  
Changeable jaw, fix-part



**ADS5010-05**  
Pressure piece

▶ **RECOMMENDED ACCESSORY GED5010IL-00-A**



**CONNECTIONS / OTHER**



**KAG500IL**  
Plug-in connector straight  
5 m - plug, socket M12



**B12-Y-5IL**  
Y-Plug-in Connector



**SCM-C-00-00-A**  
Smart Communication  
Module

▶ **RECOMMENDED ACCESSORY GED5010IO-00-A**



**CONNECTIONS / OTHER**



**KAG1000B8**  
Plug-in Connector Straight  
Cable 10 m - Female M12




**KAW1000B8**  
Plug-in Connector Angled  
Cable 10 m - Female M12


# SECURED CONFIGURATION EXAMPLES

## GEP5000 / GED5000 SERIES


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (BECKHOFF)

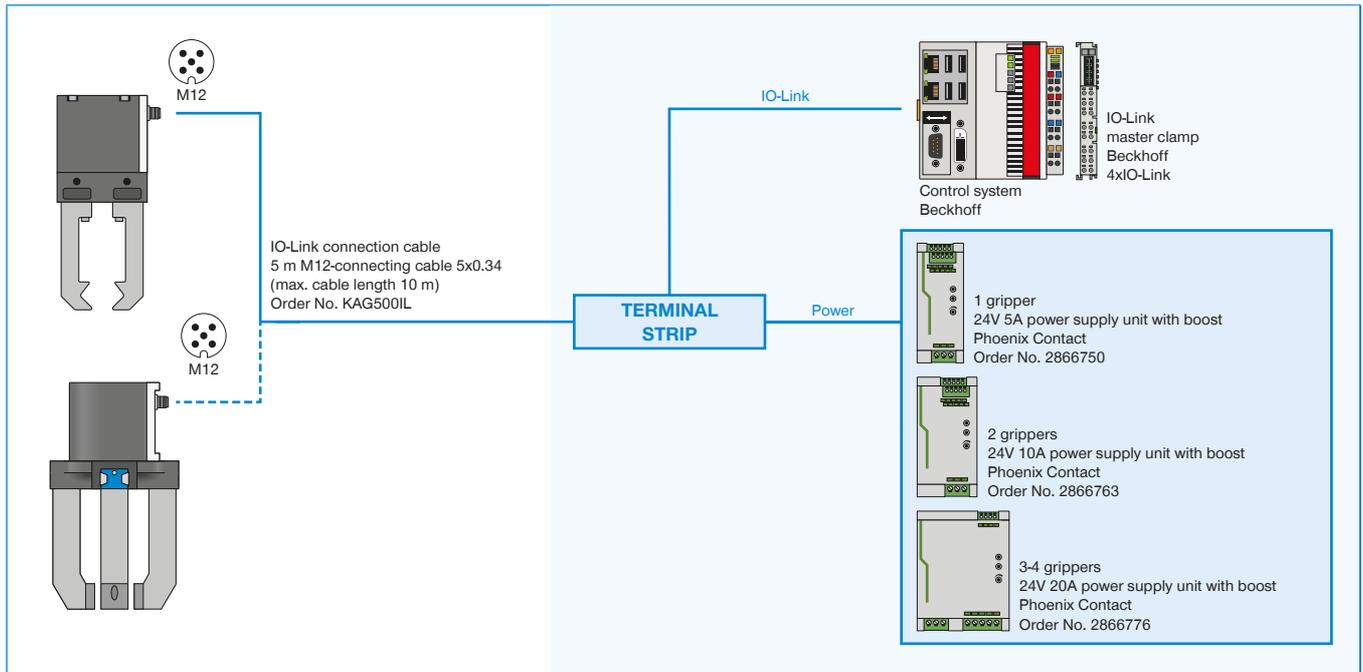


### ▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO CONTROL CABINET (SIEMENS)

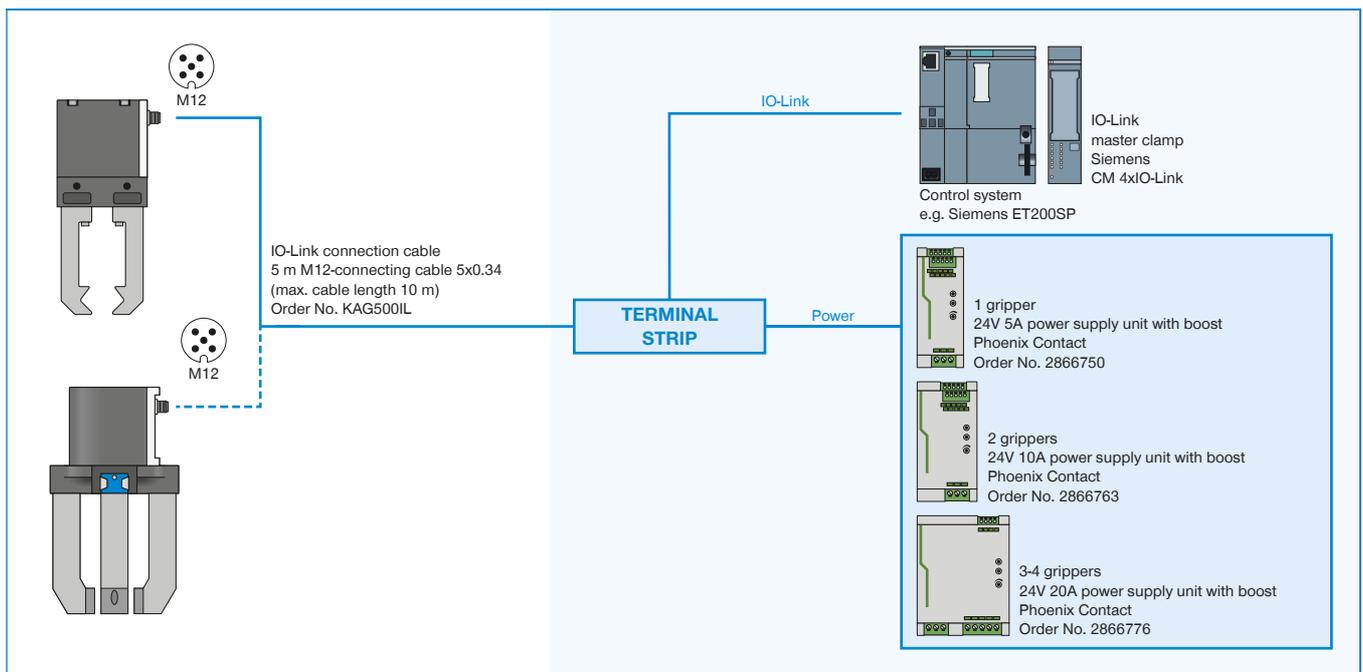

▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

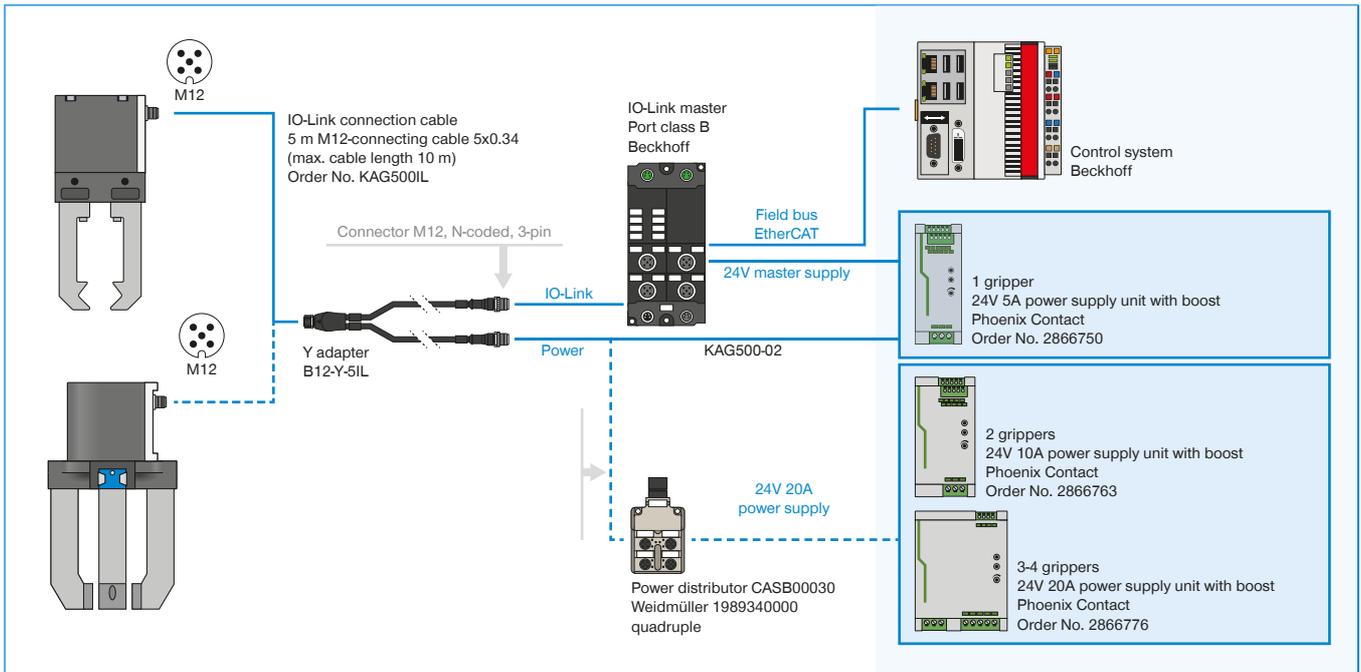


▶ GPP5000IL / GPD5000IL (IO-LINK) WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

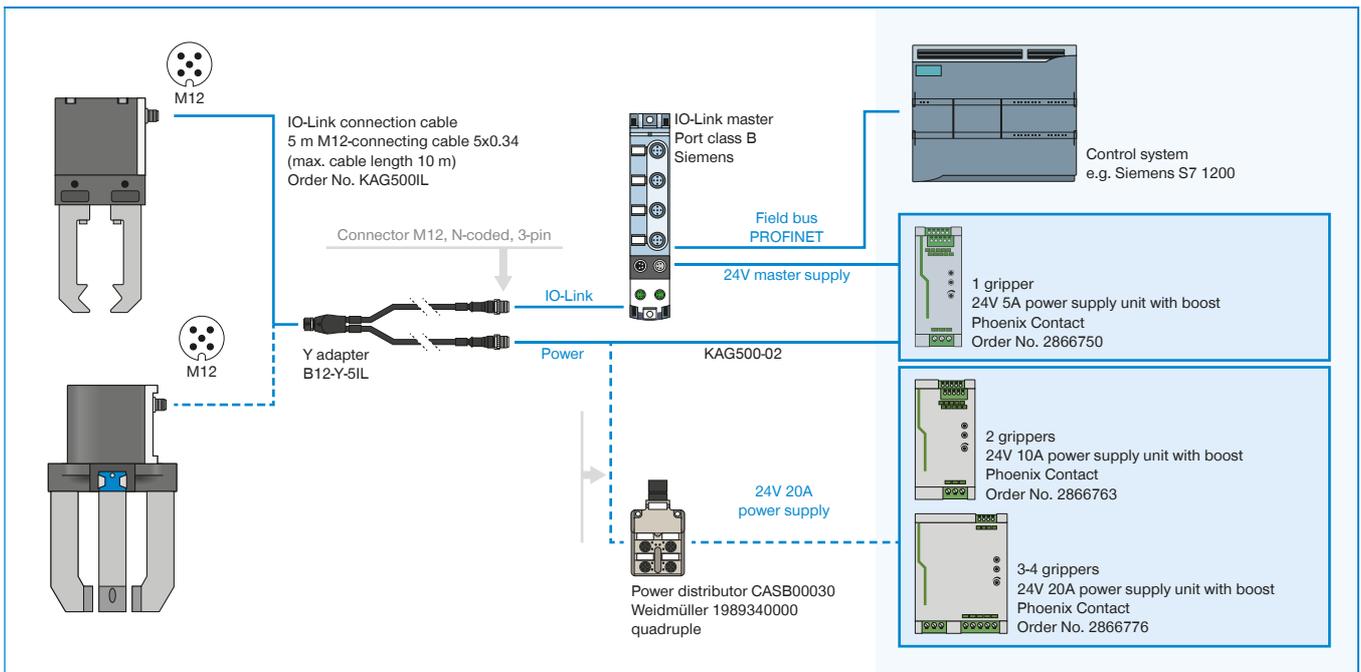

# SECURED CONFIGURATION EXAMPLES

## GEP5000 / GED5000 SERIES

### ▶ GEP5000 / GED5000 (DIGITAL IO) WIRING TO CONTROL CABINET

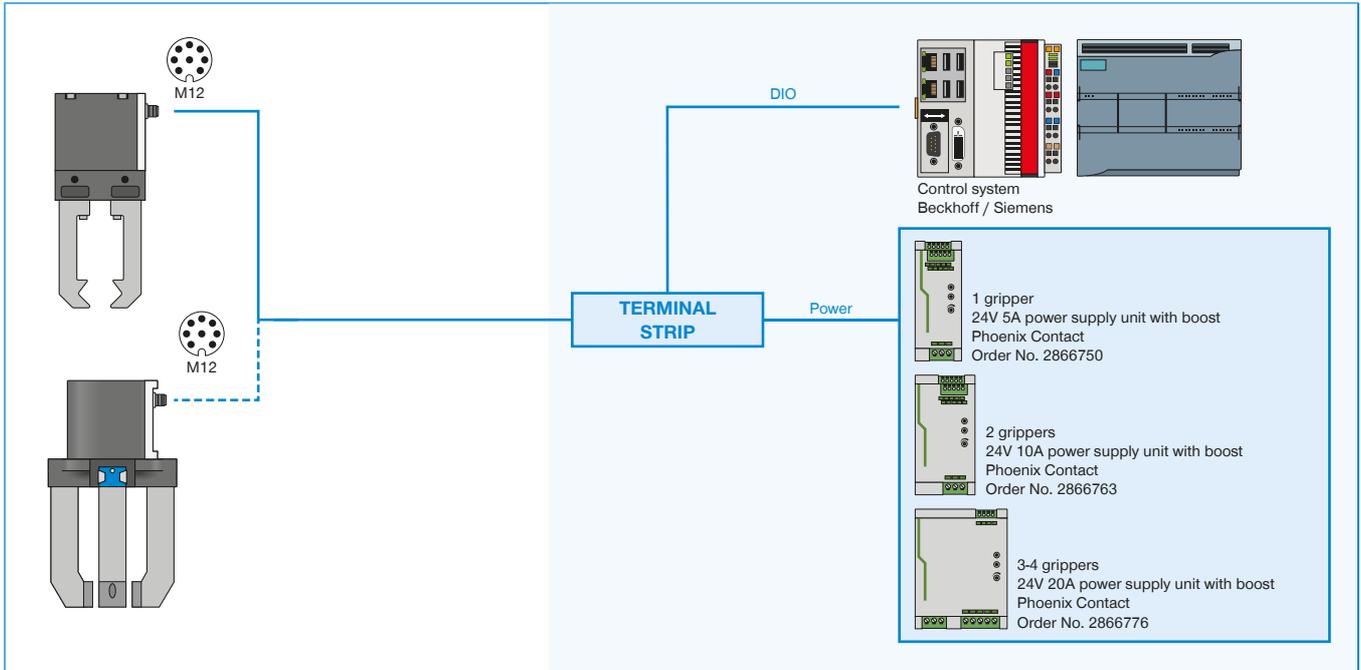




# 2-JAW ANGULAR GRIPPERS

## SERIES GPW5000

### ▶ PRODUCT ADVANTAGES

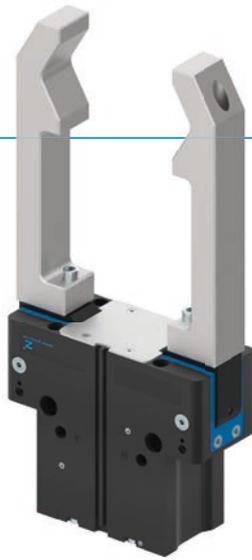

#### “The Universal One”


- ▶ **Highest performance with the smallest dimensions**  
Features a one-of-a-kind ratio of net mass to gripper finger length and gripping moment. The performance of your machine is increased as a result.
- ▶ **Versatile applicability**  
Thanks to standard functionality such as IP64 and corrosion protection, you are able to use these grippers in almost any of your applications. Even the toughest environments are no problem.
- ▶ **Robust and process-reliable**  
Thanks to a maintenance-free design up to 30 million cycles and the most solid force transmission possible, process assurance is maximized.

### ▶ SERIES CHARACTERISTICS

Installation size	Base version	Variants	
GPW50XX	NC	-00	-20
 Spring closing C	●	Basic equipment	High Temperature Version
 30 million maintenance-free cycles (max.)	●		
 Inductive sensor	●		
 Magnetic field sensor	●		
 Protected against corrosion	●		
 Purged air	●		
 IP 64	●		
 Temperature-resistant	●		



## ► BENEFITS IN DETAIL

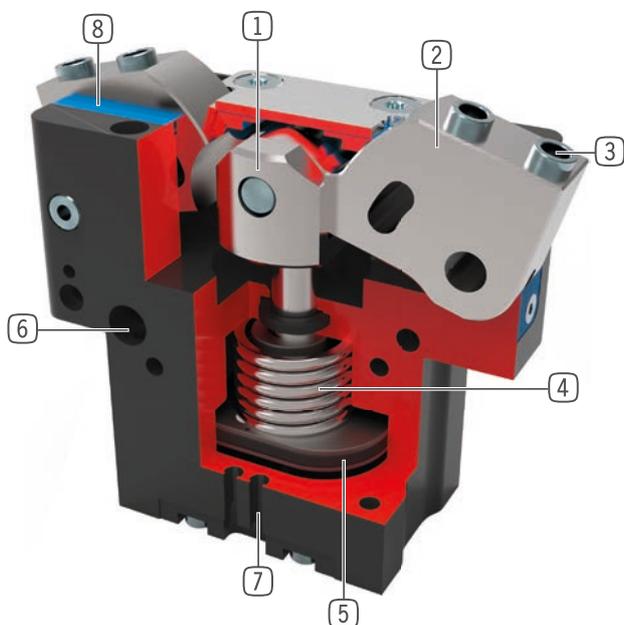

- ① **Positively driven lever mechanism**
  - synchronized the movement of the gripper jaws
- ② **Gripper jaw**
  - Gripper fingers mounted using removable centering sleeves
- ③ **Removable centering sleeves**
  - quick and economical positioning of the gripper fingers
- ④ **Integrated gripping force safety device**
  - Spring built into cylinder chamber as an energy store
- ⑤ **Drive**
  - Double-acting pneumatic rotor cylinder
- ⑥ **Mounting and positioning**
  - Alternatively, on several sides for customized mounting
- ⑦ **Sensing slot**
  - mounting and positioning of magnetic field sensors
- ⑧ **Dual lip seal**
  - IP64
  - Prevents grease from being squeezed out, increasing service life

## ► TECHNICAL DATA

Installation size	Stroke per jaw	Gripping force	Weight	IP class
	[°]	[N]	[kg]	
GPW5008	+15/-2	1450	0.9	IP64
GPW5013	+15/-2	4200	3	IP64
GPW5025	+15/-2	14500	12.1	IP64

## ► FURTHER INFORMATION IS AVAILABLE ONLINE




All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

# 2-JAW ANGULAR GRIPPERS

## SERIES GPW5000 FUNCTIONAL DESCRIPTION




### GRIPPING COMPONENTS

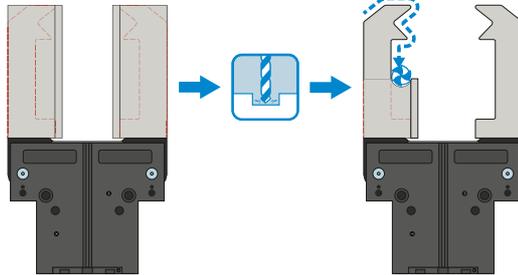

#### Universal jaws – UB5000

Can be used immediately or for individual reprocessing


The gripper blanks are available in aluminum (AL) and steel (ST) versions and are installed directly on the gripper using the screws in the scope of delivery. The fits for the centering sleeves are already in place for this purpose. One universal jaw is required for each gripper jaw.

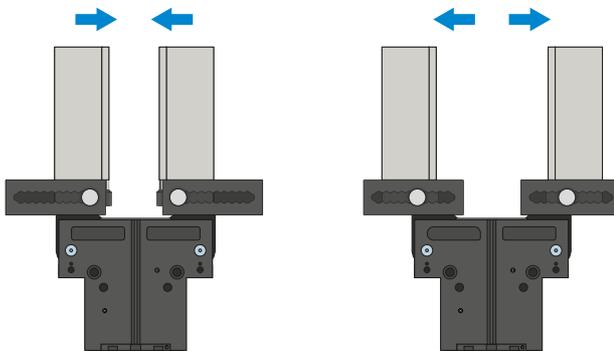

#### Adjustment jaws – EB5000

For tool-free adaptation of the gripper range

By manually activating the locking mechanism, which is pre-tensioned by a spring, the adjustment jaw can be moved within a grid of detent notches that has a number scale. Depending on the forces and torques that apply, the adjustment jaws are available in aluminum (AL) and steel (ST) versions. One adjustment jaw is required for each gripper jaw.

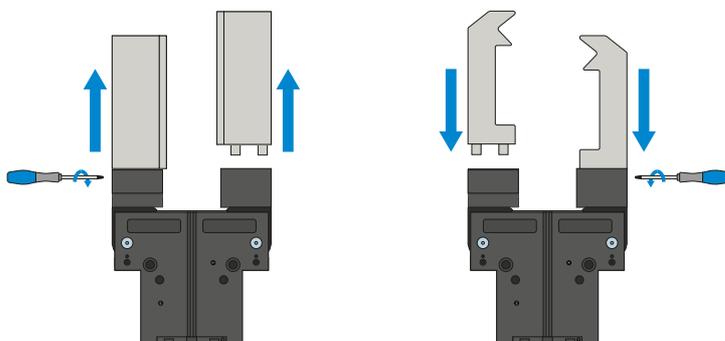

#### Interchangeable jaws – WB5000

Enable fast change of individual gripper fingers


For each gripper jaw, a fixed part and at least one loose part set is needed, depending on the number of gripper fingers to be changed. Manual locking via the Torx wrench included in the scope of delivery of the fixed part can take place from two sides.



## GRIPPING COMPONENTS

### L-gripper jaw – LB5000

Fast and easy method for adapting and installing the gripper fingers on the sides.

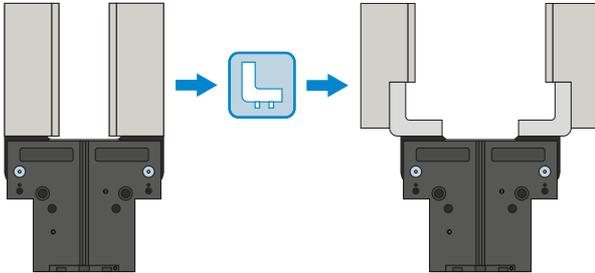


### THE GRIPPING COMPONENTS CAN BE COMBINED!

The gripper components listed above can be combined with each other and are compatible with the various series of the 5000 gripper family.



## ENERGY SUPPLY

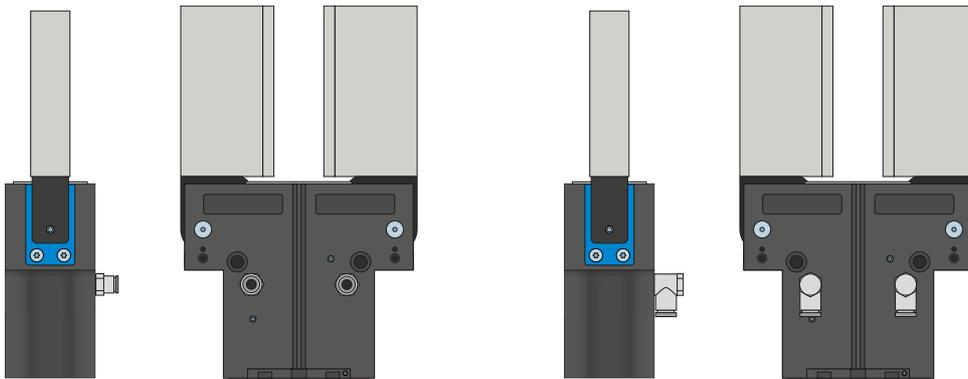

### Pneumatic threaded connections


Available in straight and angled design. Can be chosen freely depending on the space conditions or installation situation.

# 2-JAW ANGULAR GRIPPERS

## SERIES GPW5000 FUNCTIONAL DESCRIPTION



### ENERGY SUPPLY

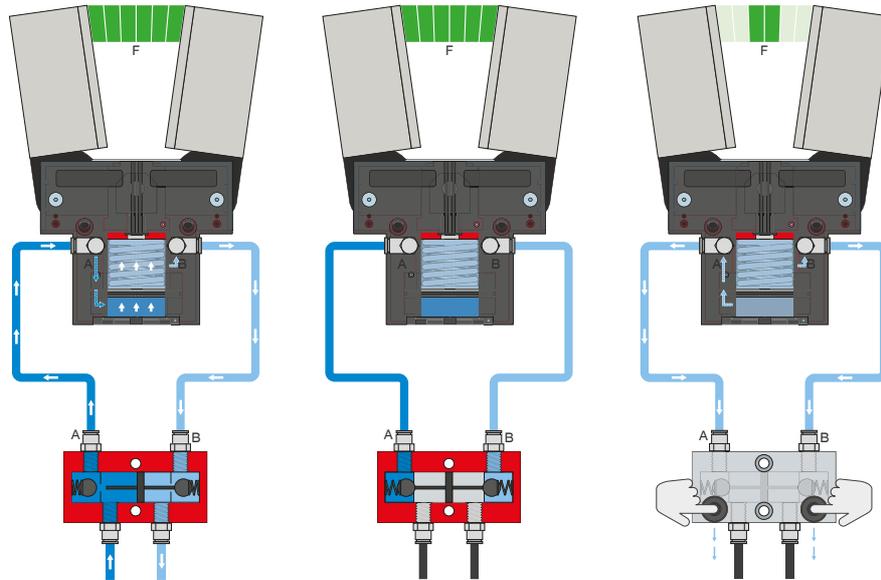


### Pressure safety valve – DSV

Ensures safe retention of force and position if the system pressure drops

The integrated double check valve, which can be unlocked, retains the system pressure of the gripper in case of EMERGENCY STOP. To ensure the function, the valve must be installed as close to the gripper's air connection as possible. In variant E, two pushbuttons are installed that allow for controlled bleeding of the gripper.



### SENSORS

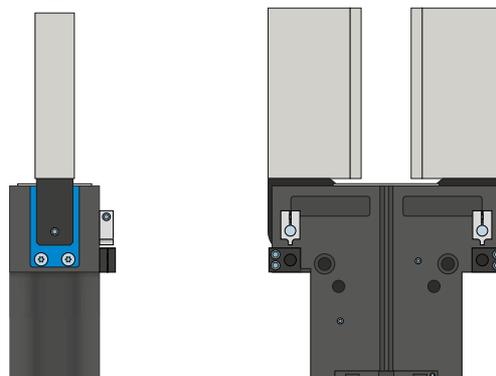


### Attachment kit

The attachment kit is installed on the gripper using the fastening material included in the scope of delivery. The attachment kit enables sensing of the gripper positions via inductive proximity switches.




## SENSORS

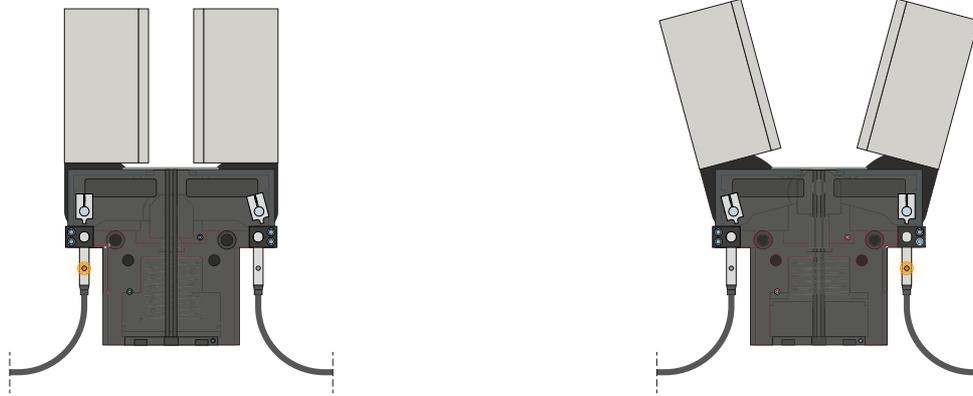

### Inductive sensors – NJ

#### For direct position sensing of the gripper jaws

The sensor is guided into the intake as far as it will go and fixed in place using the lateral clamping screw. Tuning to the desired position then takes place by adjusting the cam switch. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector, as well as with direct plug orientation.

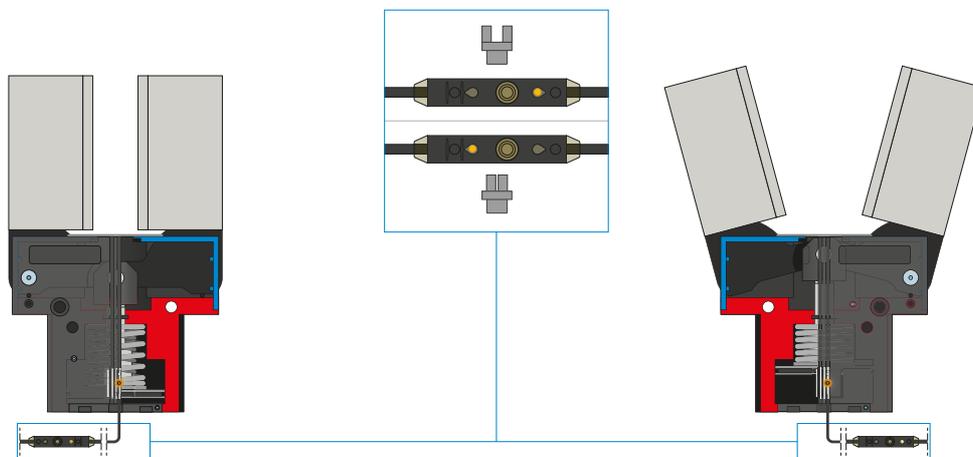

### 2-point magnetic field sensors – MFS

#### With two freely programmable switching points

Using the programming unit integrated in the cable, two switch points can be freely defined for this sensor. To do so, the sensor is clamped in the C-groove, the gripper approaches position one and the position is taught in using the teach button. Afterwards, the second position is approached with the gripper and programmed. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The sensors are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.


# 2-JAW ANGULAR GRIPPERS

## SERIES GPW5000 FUNCTIONAL DESCRIPTION




### SENSORS

MFS02

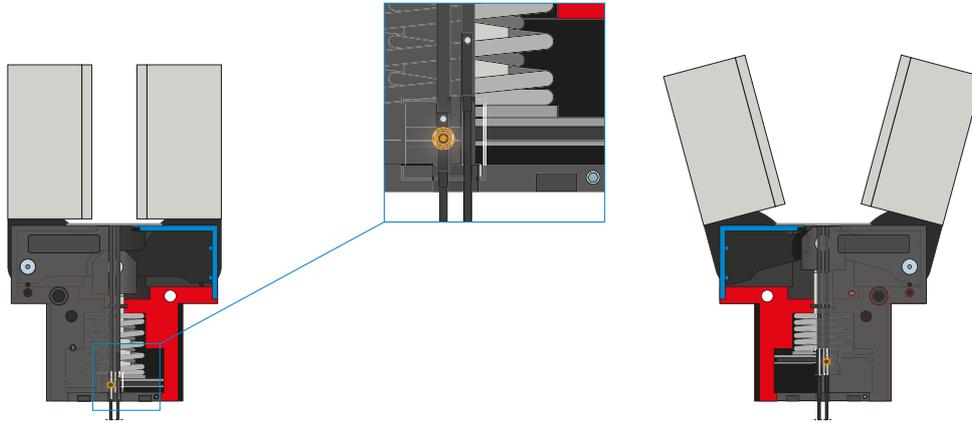

MFS01

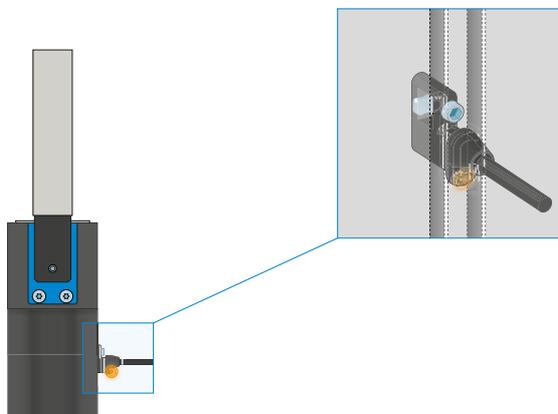


### 1-point magnetic field sensors – MFS

#### For non-contact sensing of the piston position

These sensors are installed in the C-groove of the gripper and detect the magnet attached to the piston of the gripper. To ensure use in a wide variety of space conditions, the sensors are available in two variants. While the horizontal MFS02, with straight cable outlet, disappears into the C-groove of the gripper almost completely, the vertical MFS01 is taller, but has a cable outlet that is offset at an angle of 90°. The variants are available in versions with 5 m cables with exposed leads and 0,3 m cable with connector.




## CONNECTIONS / OTHER

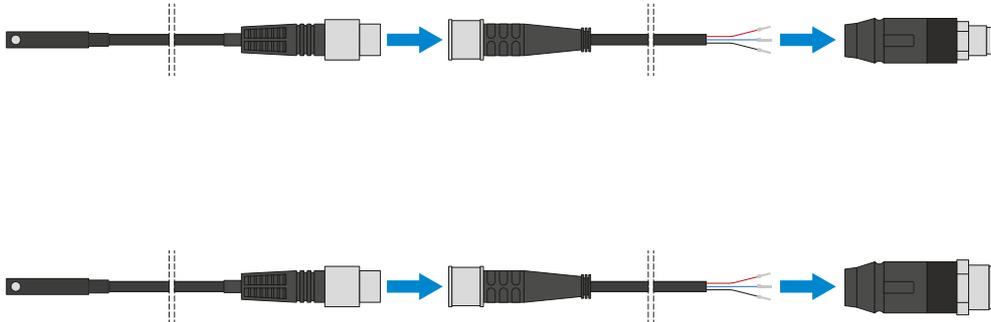

### Plug-in connectors

#### For extending and fabricating the connection lines for the sensors

Cables with a length of 5 m with exposed leads are available. Depending on the specific needs, the cables can be shortened or fabricated with connectors in sizes M8 and M12.

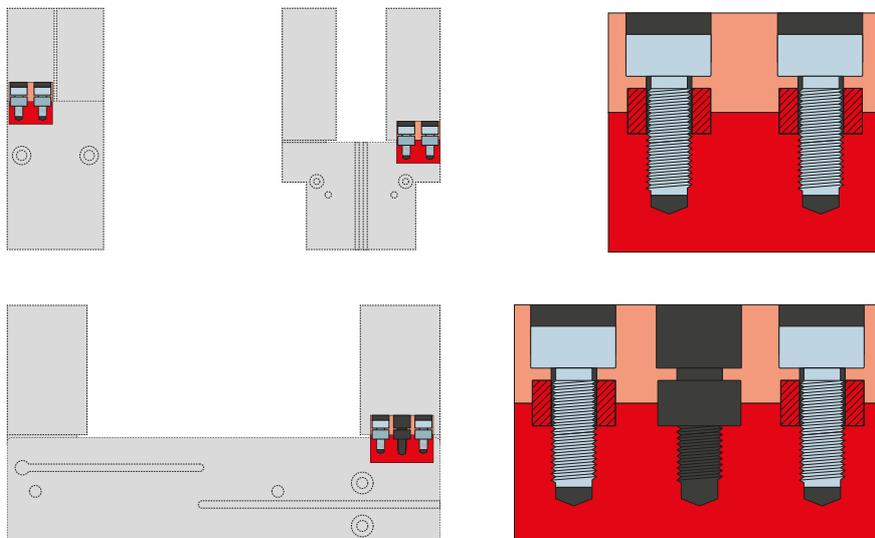

### Centering sleeves

#### For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.


# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5008

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

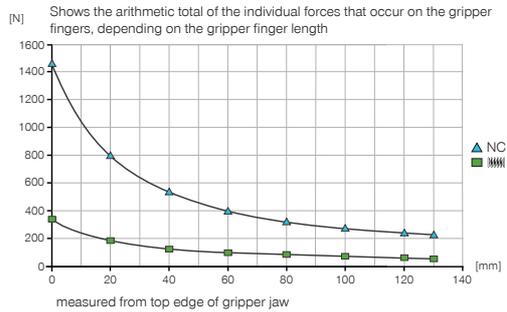

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	65
My [Nm]	60
Fa [N]	1900

### ▶ TECHNICAL DATA


Order no.	Technical data
	<b>GPW5008NC-00-A</b>
Stroke per jaw [°]	+15/-2
Gripping moment in closing max. [Nm]	33
Gripping moment secured by spring min. [Nm]	7.5
Gripping force in closing max. (at 0°) [N]*	1450
Closing time [s]	0.1
Opening time [s]	0.17
Permissible weight per jaw max [kg]	0.7
Length of the gripper fingers max. [mm]	115
Repetition accuracy +/- [mm]	0.01
Operating pressure min. [bar]	4
Operating pressure max. [bar]	8
Nominal operating pressure [bar]	6
Operating temperature [°C]	-10 ... +90
Air volume per cycle [cm³]	35
Protection to IEC 60529	IP64
Weight [kg]	0.9

\*measured from top edge of gripper jaw


#### ▶ Technical Data - High Temperature Version

Order no.	Technical data
	<b>GPW5008NC-20-A</b>
Operating temperature [°C]	-10 ... +130

## TECHNICAL DRAWINGS

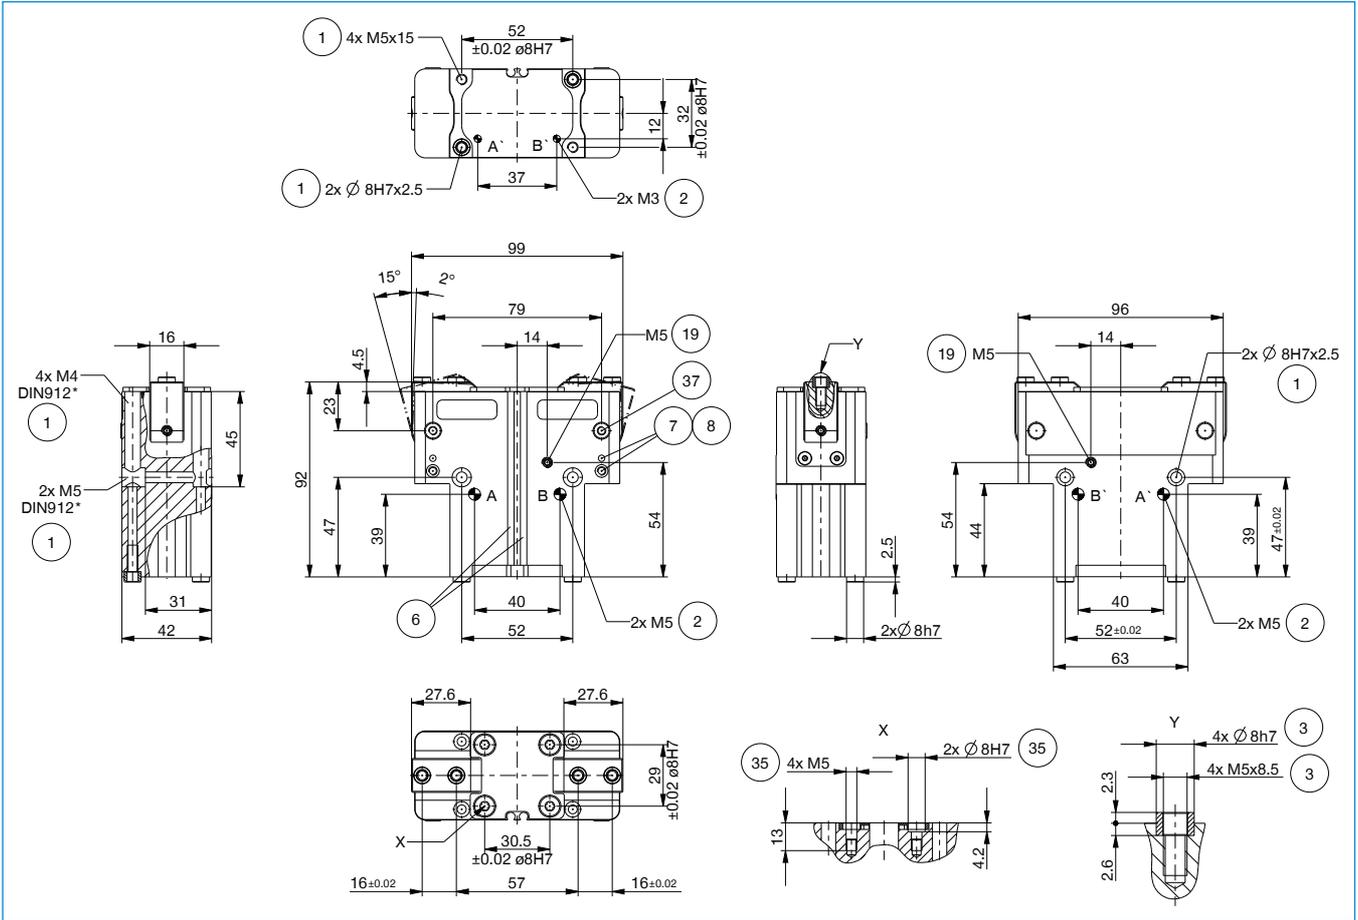


- |  |  |
|--|--|
| ① Gripper attachment                         | screwe                                 |
| ② Energy supply                              | ③⑦ Mounting possibility for cam switch |
| ③ Fixing for gripper finger                  | ③⑧ Adapter                             |
| ⑥ Integrated slot for magnetic field sensor  | ③⑨ Gripper                             |
| ⑦ Fixing for mounting block                  | Ⓐ Air connection (close)               |
| ⑧ Fixing clamping bracket (KHA)              | Ⓑ Air connection (open)                |
| ⑱ Air purge connection option                | Ⓐ Air connection, alternative (close)  |
| ⑳ Mounting possibility for stroke adjustment | Ⓑ Air connection, alternative (open)   |

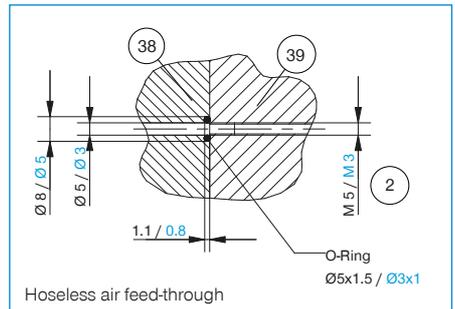

# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5008

### ▶ ACCESORIES

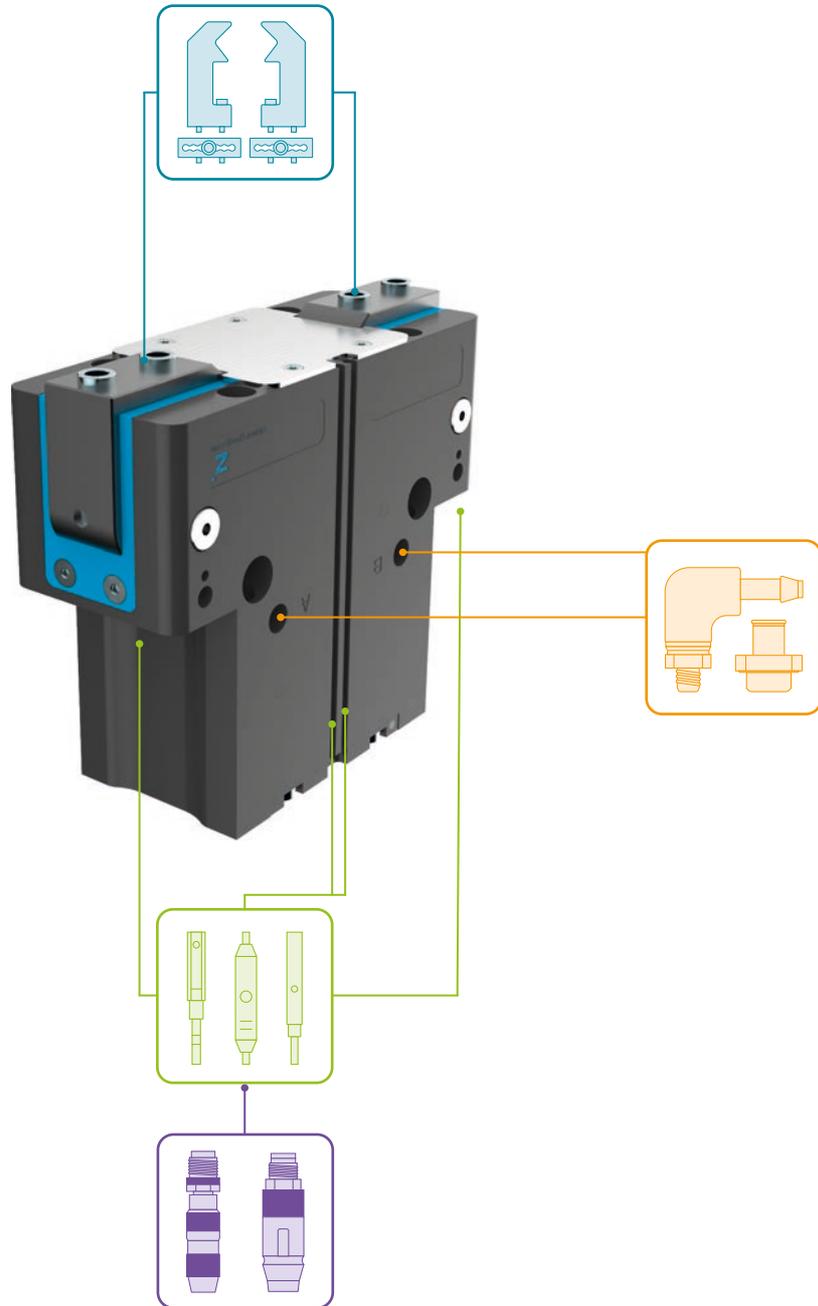

### ▶ INCLUDED IN DELIVERY



6 [piece]  
Centering Disc

024231

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5008AL**  
Universal jaw aluminium



**UB5008ST**  
Universal jaw steel



**EB5008AL**  
Aluminum adjustment jaw



**EB5008ST**  
Steel adjustment jaw



**LB5008**  
L-jaw



**WB5008L**  
Changeable jaw, loose-part-set



**WB5008F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**WVM5**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**ANS0084**  
Attachment Kit for Inductive Proximity Switch



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)


# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5013

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

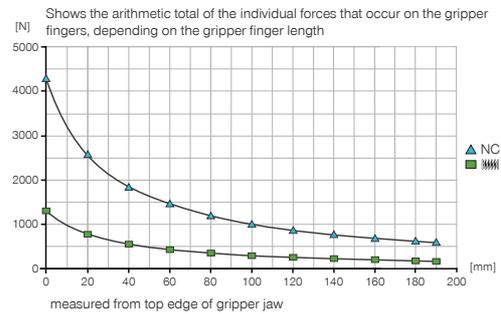

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	110
My [Nm]	130
Fa [N]	3300


### ▶ TECHNICAL DATA

Order no.	Technical data
	<b>GPW5013NC-00-A</b>
Stroke per jaw [°]	+15/-2
Gripping moment in closing max. [Nm]	130
Gripping moment secured by spring min. [Nm]	39.5
Gripping force in closing max. (at 0°) [N]*	4200
Closing time [s]	0.08
Opening time [s]	0.12
Permissible weight per jaw max [kg]	2.4
Length of the gripper fingers max. [mm]	185
Repetition accuracy +/- [mm]	0.01
Operating pressure min. [bar]	4
Operating pressure max. [bar]	8
Nominal operating pressure [bar]	6
Operating temperature [°C]	-10 ... +90
Air volume per cycle [cm³]	160
Protection to IEC 60529	IP64
Weight [kg]	3


\*measured from top edge of gripper jaw

Order no.	Technical Data - High Temperature Version
	<b>GPW5013NC-20-A</b>
Operating temperature [°C]	-10 ... +130

## TECHNICAL DRAWINGS

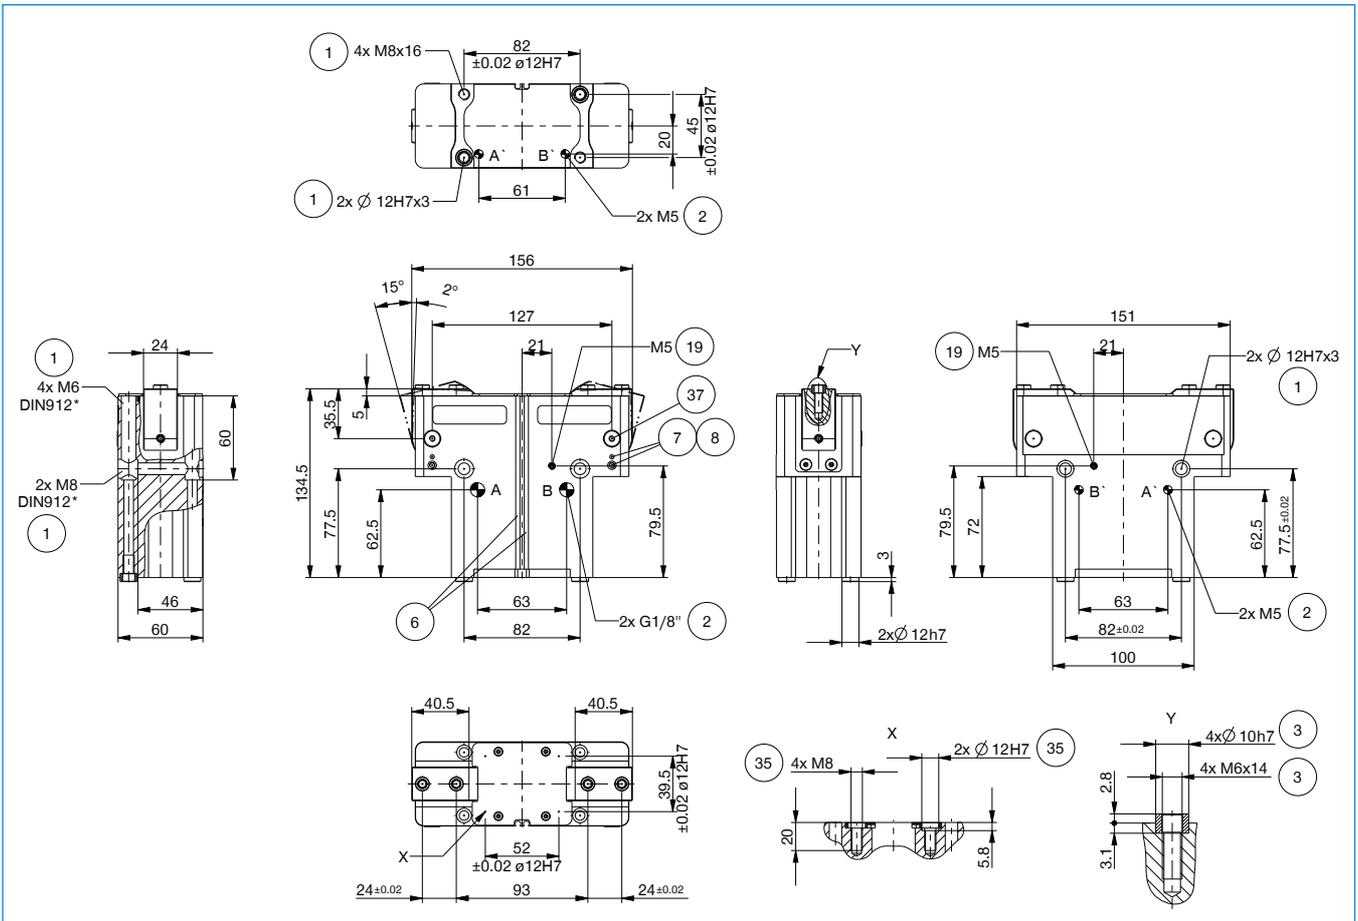


- |  |  |
|--|--|
| ① Gripper attachment                         | screwe                                 |
| ② Energy supply                              | ③⑦ Mounting possibility for cam switch |
| ③ Fixing for gripper finger                  | ③⑧ Adapter                             |
| ⑥ Integrated slot for magnetic field sensor  | ③⑨ Gripper                             |
| ⑦ Fixing for mounting block                  | Ⓐ Air connection (close)               |
| ⑧ Fixing clamping bracket (KHA)              | Ⓑ Air connection (open)                |
| ⑱ Air purge connection option                | Ⓐ Air connection, alternative (close)  |
| ⑳ Mounting possibility for stroke adjustment | Ⓑ Air connection, alternative (open)   |

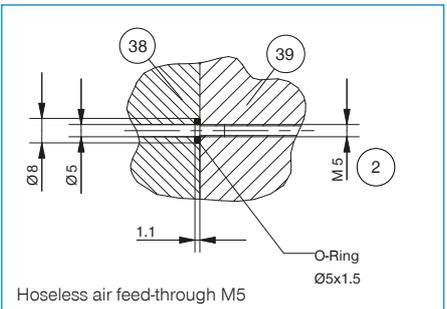

# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5013

### ▶ ACCESSORIES

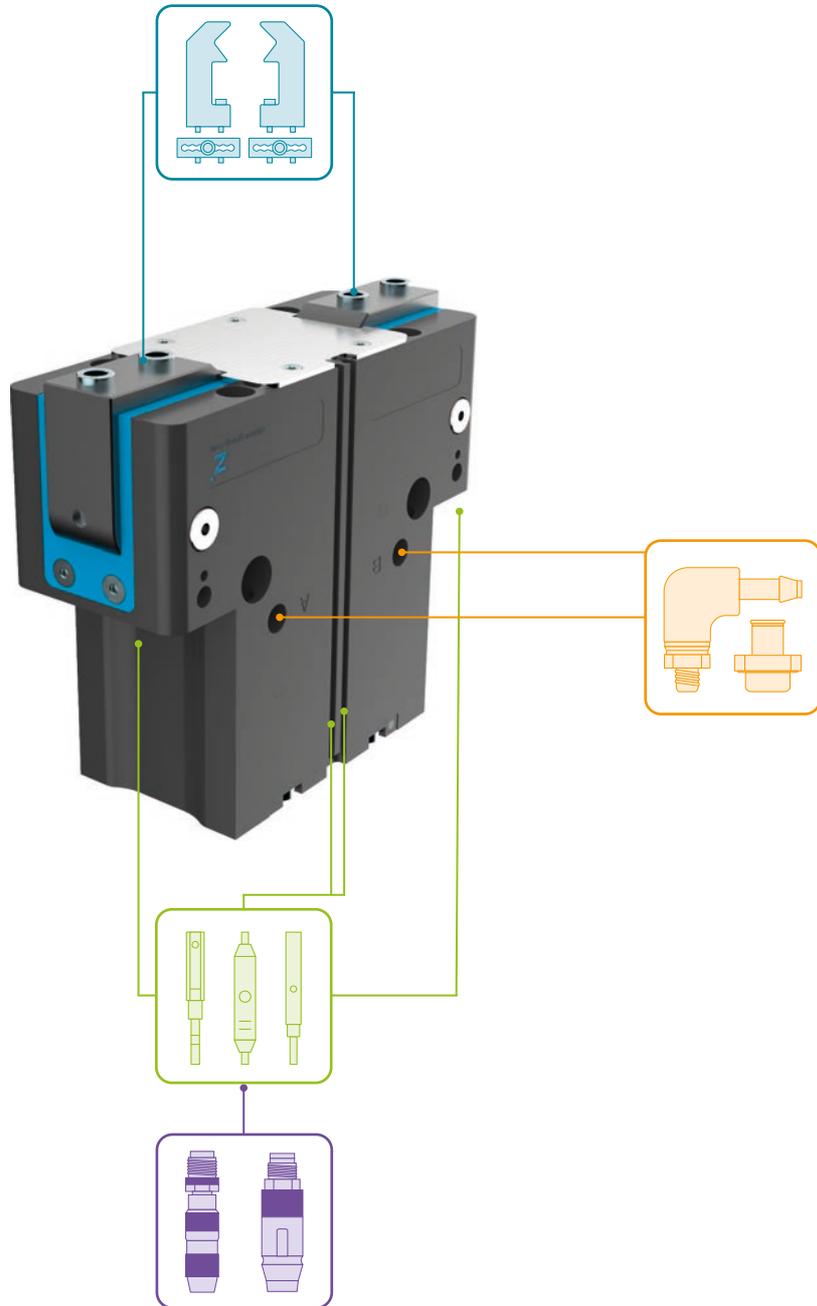

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

018187



2 [piece]  
Centering Disc

019280

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5013AL**  
Universal jaw aluminium



**UB5013ST**  
Universal jaw steel



**EB5013AL**  
Aluminum adjustment jaw



**EB5013ST**  
Steel adjustment jaw



**LB5013**  
L-jaw



**WB5013L**  
Changeable jaw, loose-part-set



**WB5013F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**ANS0084**  
Attachment Kit for Inductive Proximity Switch



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)


# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5025

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

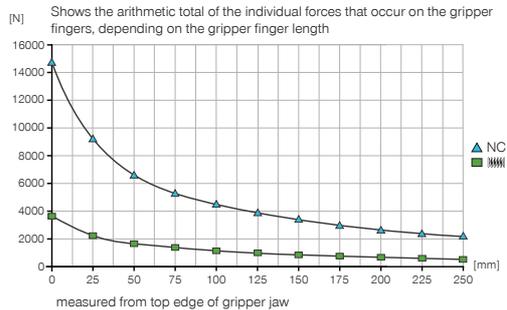

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	180
My [Nm]	225
Fa [N]	7500

### ▶ TECHNICAL DATA


Order no.	Technical data
	<b>GPW5025NC-00-A</b>
Stroke per jaw [°]	+15/-2
Gripping moment in closing max. [Nm]	620
Gripping moment secured by spring min. [Nm]	150
Gripping force in closing max. (at 0°) [N]*	14500
Closing time [s]	0.155
Opening time [s]	0.30
Permissible weight per jaw max [kg]	7
Length of the gripper fingers max. [mm]	265
Repetition accuracy +/- [mm]	0.01
Operating pressure min. [bar]	4
Operating pressure max. [bar]	8
Nominal operating pressure [bar]	6
Operating temperature [°C]	-10 ... +90
Air volume per cycle [cm³]	780
Protection to IEC 60529	IP64
Weight [kg]	12.1

\*measured from top edge of gripper jaw


#### ▶ Technical Data - High Temperature Version

Order no.	Technical data
	<b>GPW5025NC-20-A</b>
Operating temperature [°C]	-10 ... +130

## TECHNICAL DRAWINGS

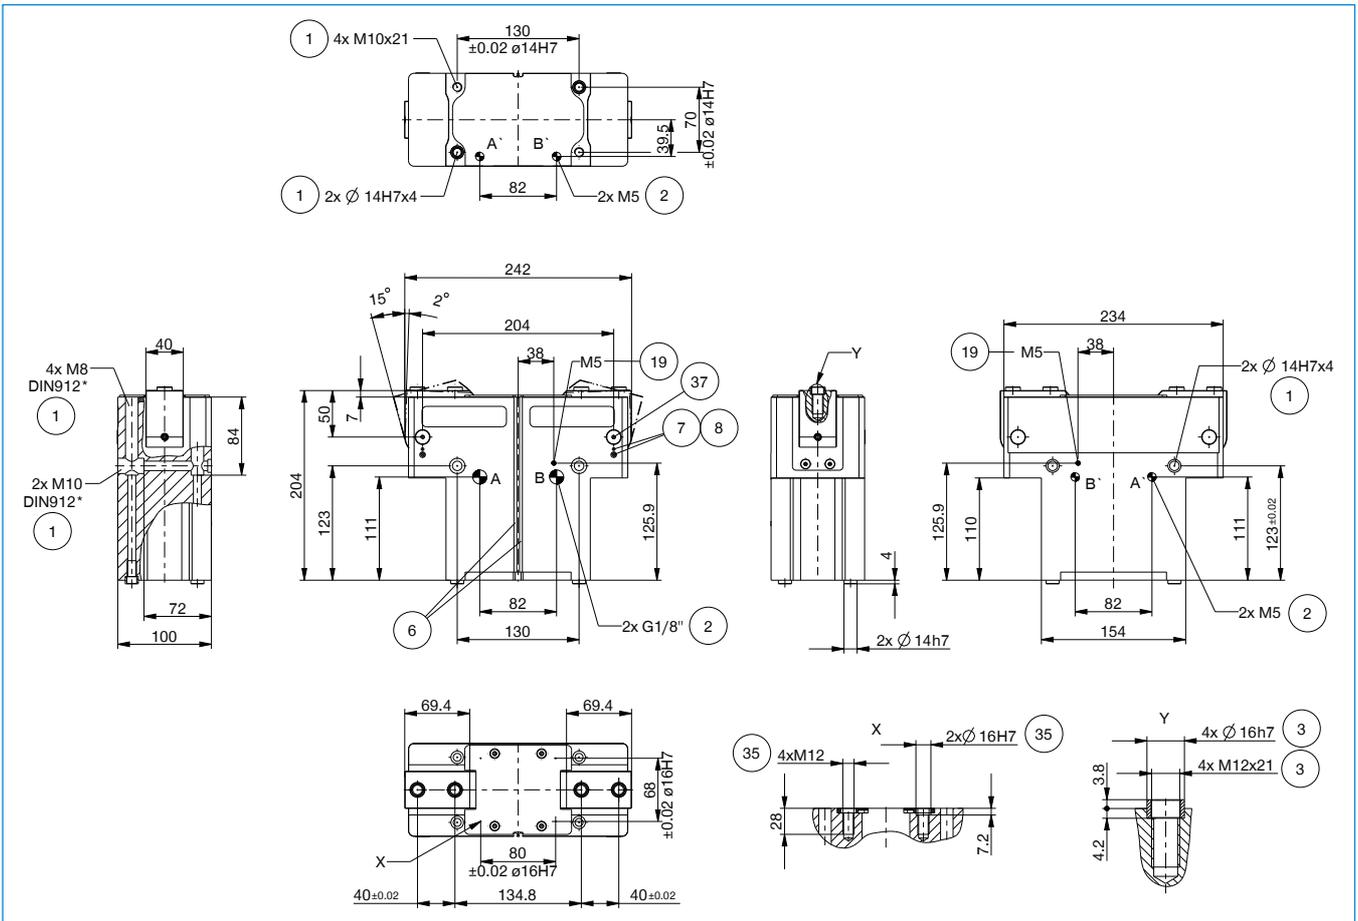


- |   |  |
|---|--|
| ① Gripper attachment                          | screwe                                 |
| ② Energy supply                               | ③⑦ Mounting possibility for cam switch |
| ③ Fixing for gripper finger                   | ③⑧ Adapter                             |
| ⑥ Integrated slot for magnetic field sensor   | ③⑨ Gripper                             |
| ⑦ Fixing for mounting block                   | Ⓐ Air connection (close)               |
| ⑧ Fixing clamping bracket (KHA)               | Ⓑ Air connection (open)                |
| ⑱ Air purge connection option                 | Ⓐ Air connection, alternative (close)  |
| ③⑤ Mounting possibility for stroke adjustment | Ⓑ Air connection, alternative (open)   |

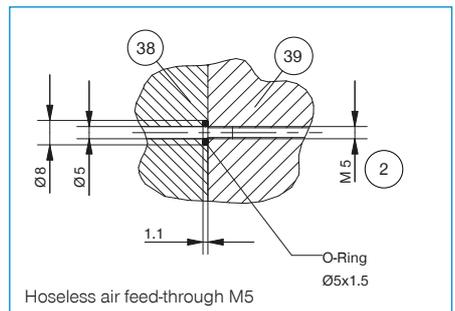

# 2-JAW ANGULAR GRIPPERS

## INSTALLATION SIZE GPW5025

### ▶ ACCESSORIES

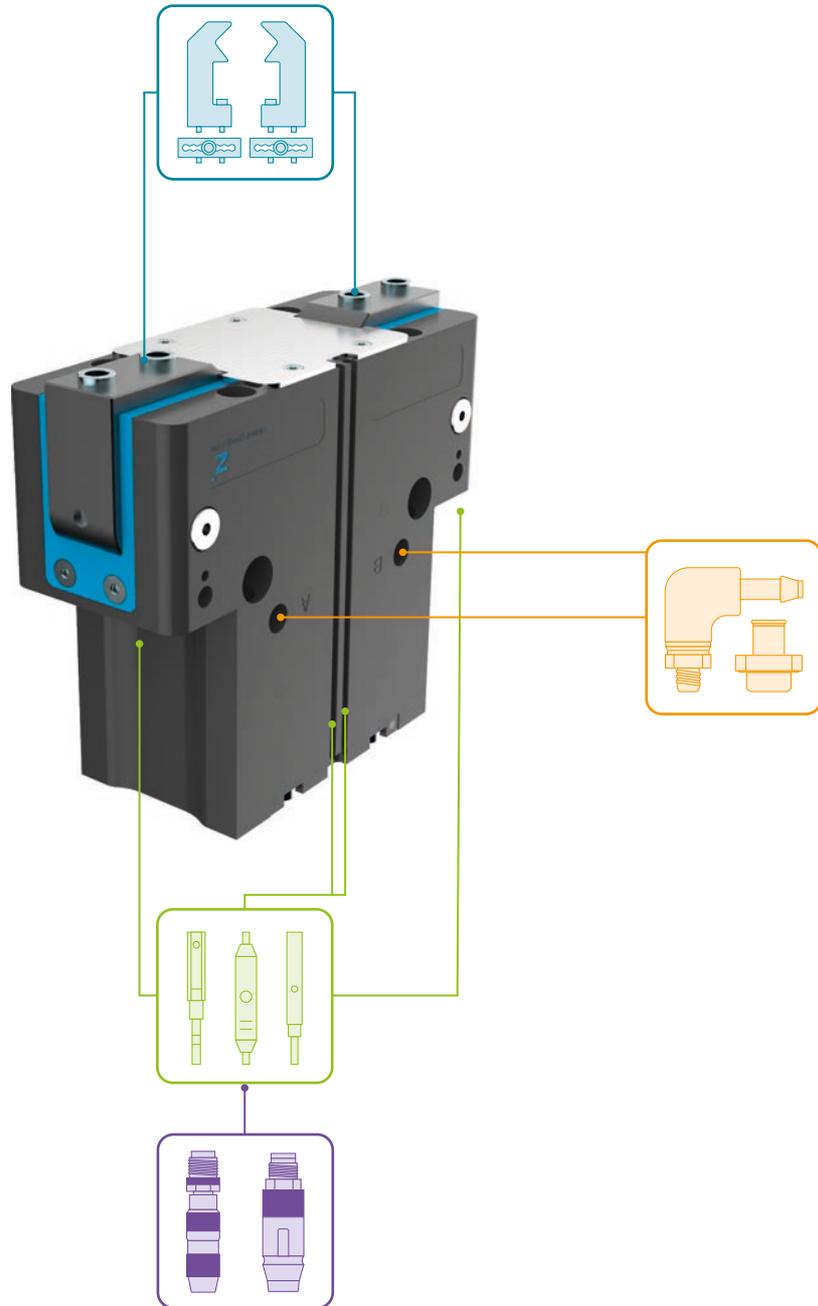

### ▶ INCLUDED IN DELIVERY



4 [piece]  
Centering Disc

030529



2 [piece]  
Centering Disc

019387

## ▶ RECOMMENDED ACCESSORIES



### GRIPPING COMPONENTS



**UB5025AL**  
Universal jaw aluminium



**UB5025ST**  
Universal jaw steel



**EB5025AL**  
Aluminum adjustment jaw



**EB5025ST**  
Steel adjustment jaw



**LB5025**  
L-jaw



**WB5025L**  
Changeable jaw, loose-part-set



**WB5025F**  
Changeable jaw, fix-part



### ENERGY SUPPLY



**WV1-8X8**  
Angled Fittings - Quick Connect Style



**DSV1-8**  
Pressure safety valve



**DSV1-8E**  
Pressure safety valve with quick exhaust



### SENSORS



**ANS0084**  
Attachment Kit for Inductive Proximity Switch



**NJ8-E2S**  
Inductive proximity switch - Connector M8



**MFS01-S-KHC-P1-PNP**  
Magnetic field sensor Angled Cable 0,3 m - Connector M8



**MFS02-S-KHC-P1-PNP**  
Magnetic field sensor Straight Cable 0,3 m - Connector M8




**MFS01-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



**MFS02-S-KHC-P2-PNP**  
2-Position-Sensor Cable 0,3 m - Connector M8



### CONNECTIONS / OTHER



**KAG500**  
Plug-in connector Straight Cable 5m - Socket M8 (female)

# ADJUSTMENT JAWS

## SERIES EB5000

### ▶ PRODUCT ADVANTAGES



#### ▶ Easy and fast

Easy gripper finger adjustment to fit various workpieces saves time and money

#### ▶ Reproducible and durable

The numbering of the detent notches allows you to easily configure the gripper finger length and FEM-calculated adjustment jaws guarantee maximum process reliability

- #### ▶ You can install one and the same adjustment jaw within the same 5000 gripper range on various gripper types of identical size and combine it with the respective accessory parts. This increases flexibility and reduces the diversity of parts in equal measure, which in turn reduces the storage costs

### ▶ THE BEST PRODUCT FOR YOUR APPLICATION




#### ▶ Our products welcome the challenge!

Extreme conditions, all over the world—our tried and tested components and systems give you endless possibilities.

Find the best product for your specific use:

[www.zimmer-group.com](http://www.zimmer-group.com)

## ▶ SETTING THE GRIPPER FINGER POSITION IN UNDER 10 SECONDS

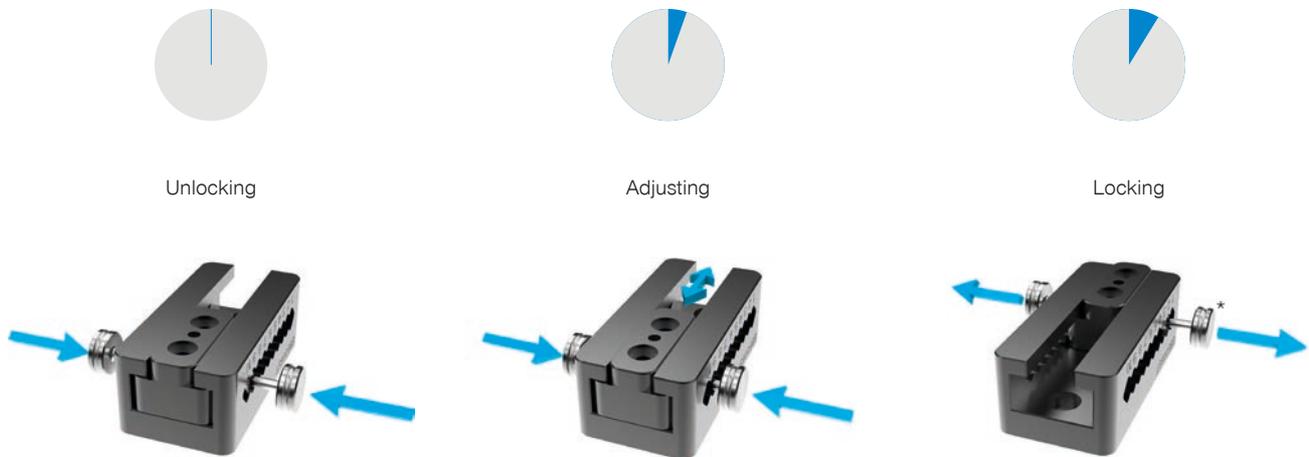

\* Pressure pieces are screwed on and can be removed to minimize interference contours

## ▶ FURTHER INFORMATION IS AVAILABLE ONLINE



All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5003

### ▶ PRODUCT SPECIFICATIONS










#### ▶ Gripping force diagram

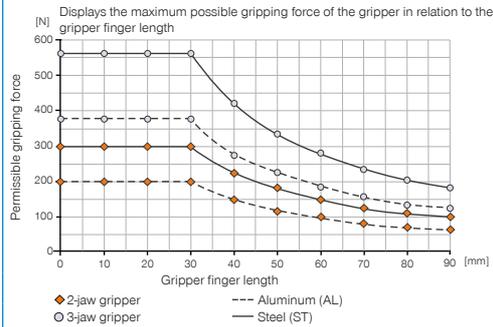

#### ▶ Technical data

Order no.	EB5003AL	EB5003ST
compatible with installation size	GPP5003 / GPD5003	GPP5003 / GPD5003
Max. adjustment range [mm]	21	24
Spacing [mm]	7x3	8x3
Weight per adjustment jaw [kg]	0.04	0.09

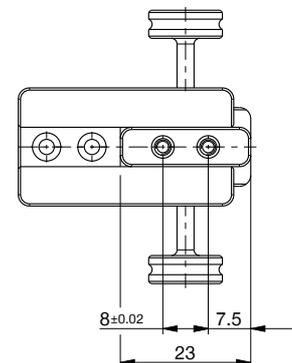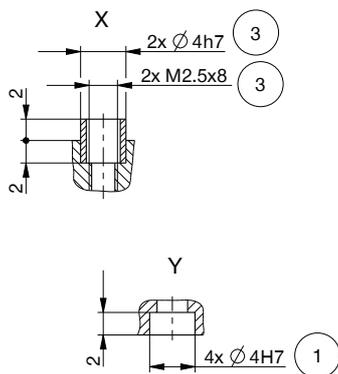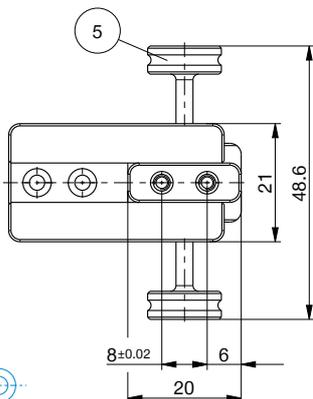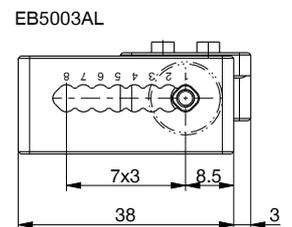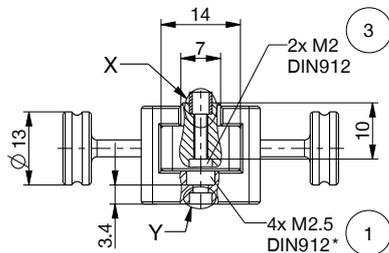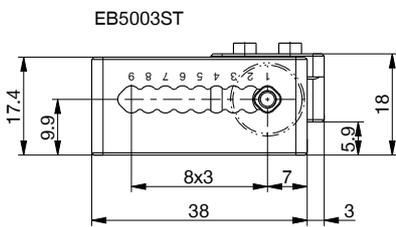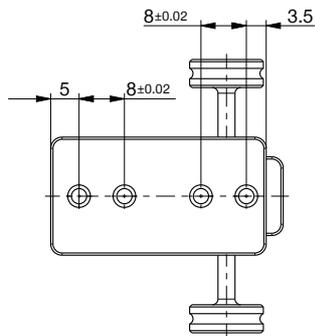

- ① Fastening the adjustment jaw
- ③ Fixing for gripper finger
- ⑤ Adjustment mechanism (removable)


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5004

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

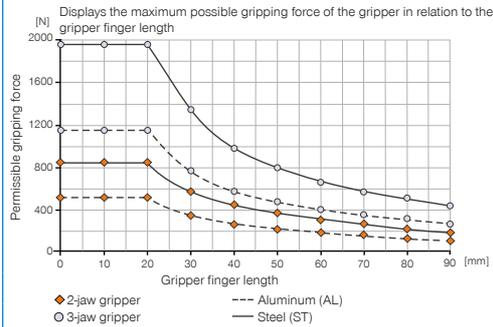

#### ▶ Technical data

Order no.	EB5004AL	EB5004ST
compatible with installation size	GPP5004 / GPD5004	GPP5004 / GPD5004
Max. adjustment range [mm]	28	32
Spacing [mm]	7x4	8x4
Weight per adjustment jaw [kg]	0.06	0.13

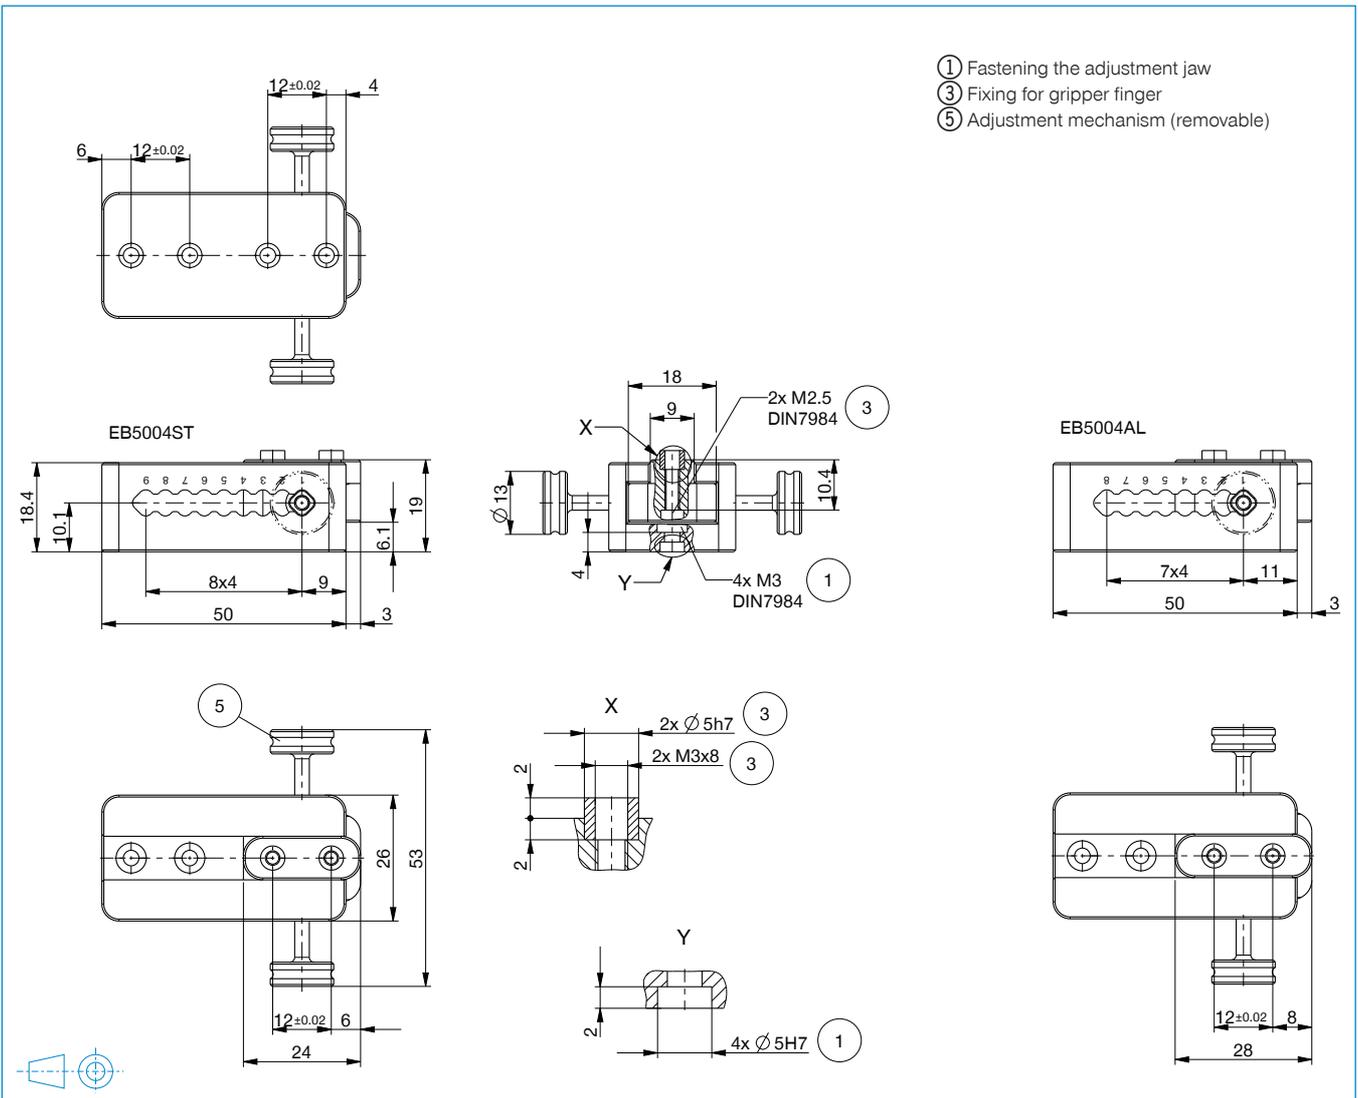


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5006

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

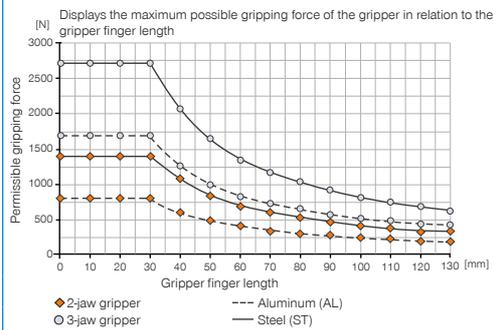

#### ▶ Technical data

Order no.	EB5006AL	EB5006ST
compatible with installation size	GPP5006 / GEP5006 / GPD5006 / GED5006	GPP5006 / GEP5006 / GPD5006 / GED5006
Max. adjustment range [mm]	35	40
Spacing [mm]	7x5	8x5
Weight per adjustment jaw [kg]	0.10	0.20

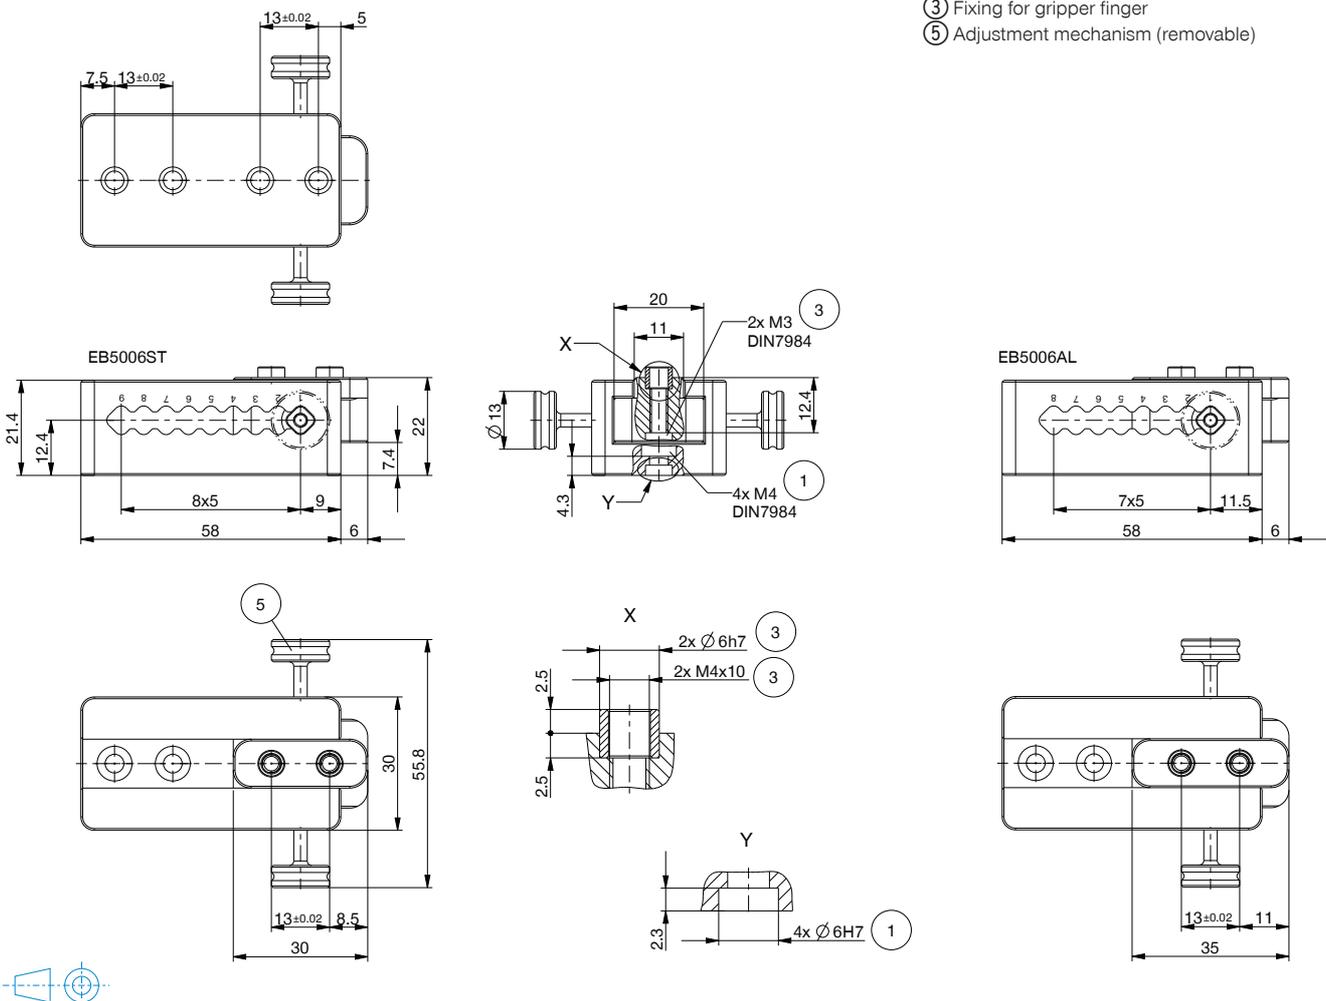


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5008

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

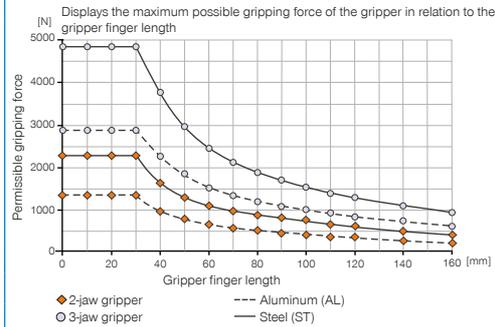

#### ▶ Technical data

Order no.	EB5008AL	EB5008ST
compatible with installation size	GPP5008 / GEP5008 / GPD5008 / GED5008 / GPW5008	GPP5008 / GEP5008 / GPD5008 / GED5008 / GPW5008
Max. adjustment range [mm]	40	45
Spacing [mm]	8x5	9x5
Weight per adjustment jaw [kg]	0.14	0.34

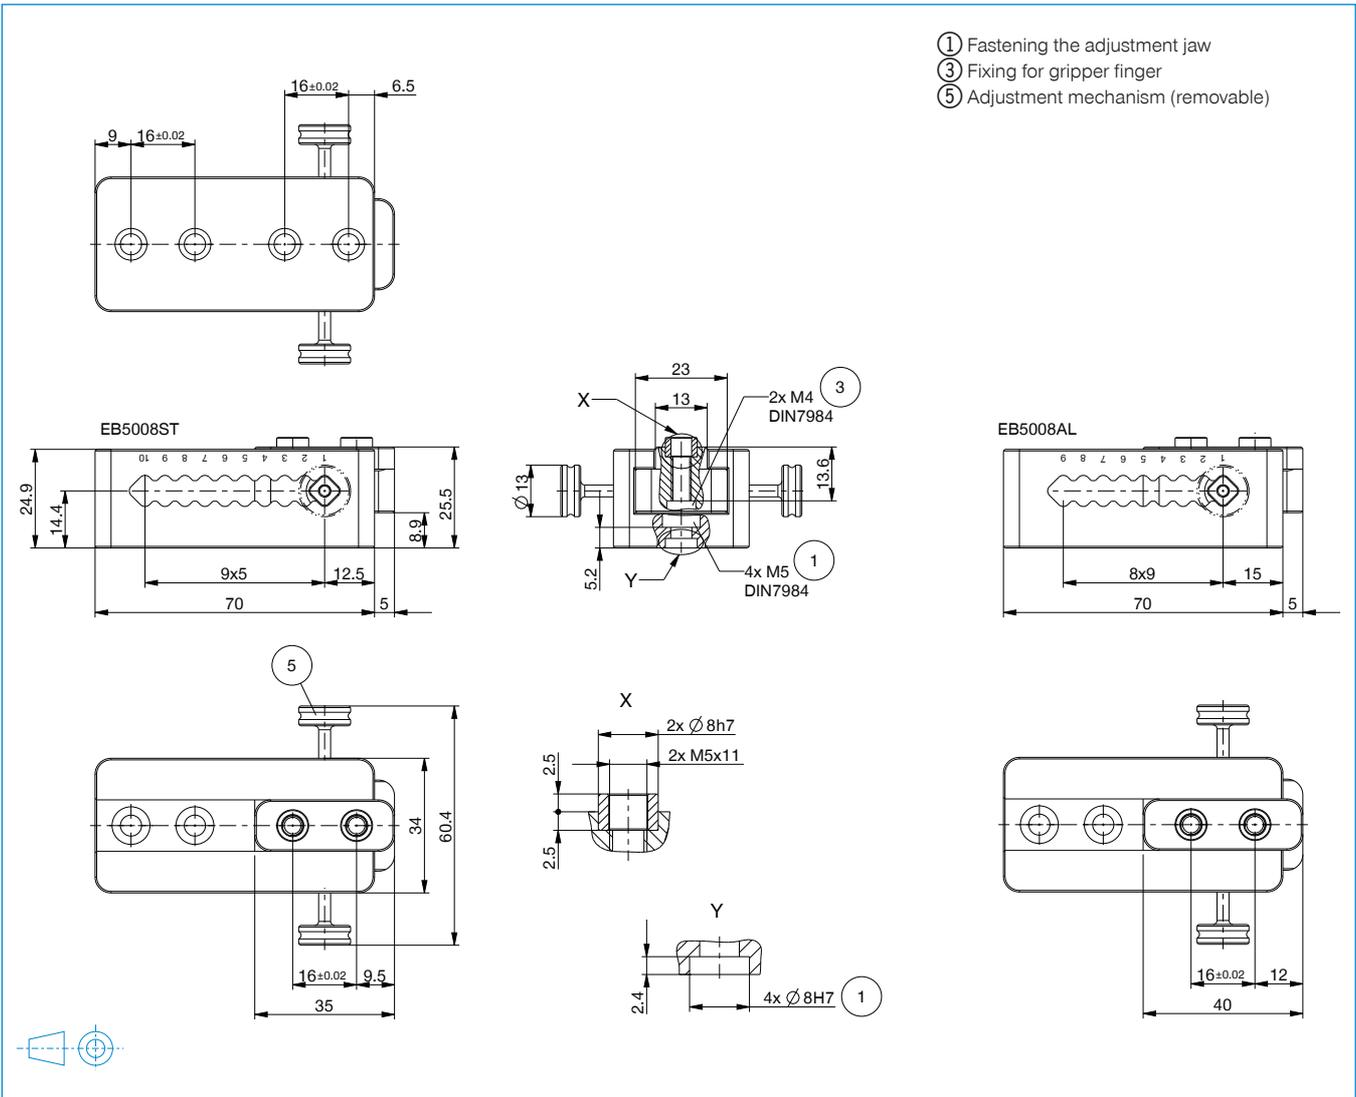


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5010

### ▶ PRODUCT SPECIFICATIONS






#### ▶ Gripping force diagram




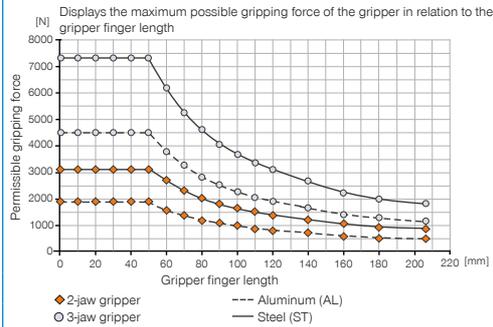


#### ▶ Technical data

Order no.	EB5010AL	EB5010ST
compatible with installation size	GPP5010 / GEP5010 / GPD5010 / GED5010	GPP5010 / GEP5010 / GPD5010 / GED5010
Max. adjustment range [mm]	54	60
Spacing [mm]	9x6	10x6
Weight per adjustment jaw [kg]	0.19	0.45

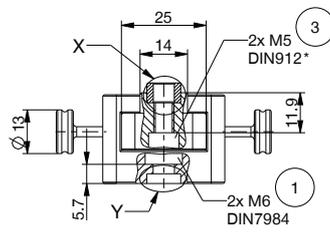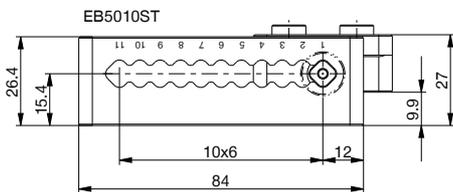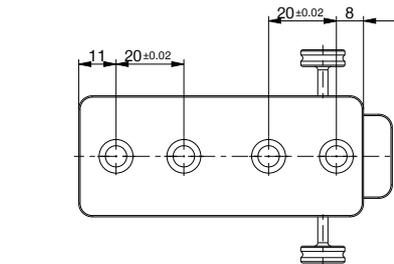

- ① Fastening the adjustment jaw
- ③ Fixing for gripper finger
- ⑤ Adjustment mechanism (removable)

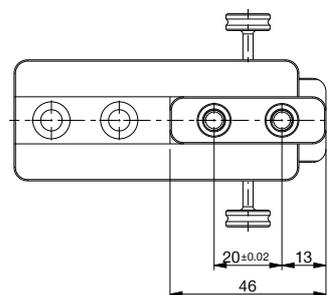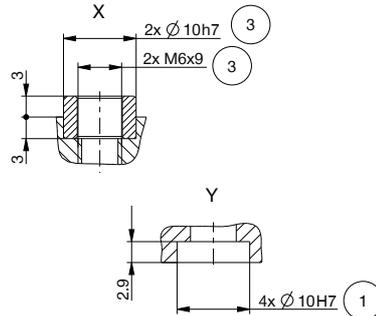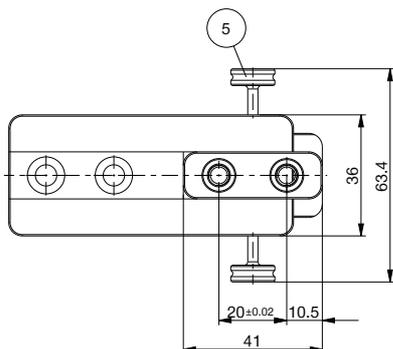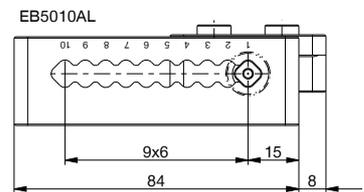


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5013

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

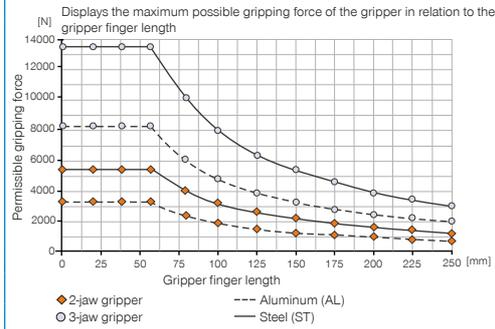

#### ▶ Technical data

Order no.	EB5013AL	EB5013ST
compatible with installation size	GPP5013 / GPD5013 / GPW5013	GPP5013 / GPD5013 / GPW5013
Max. adjustment range [mm]	63	70
Spacing [mm]	9x7	10x7
Weight per adjustment jaw [kg]	0.30	0.75

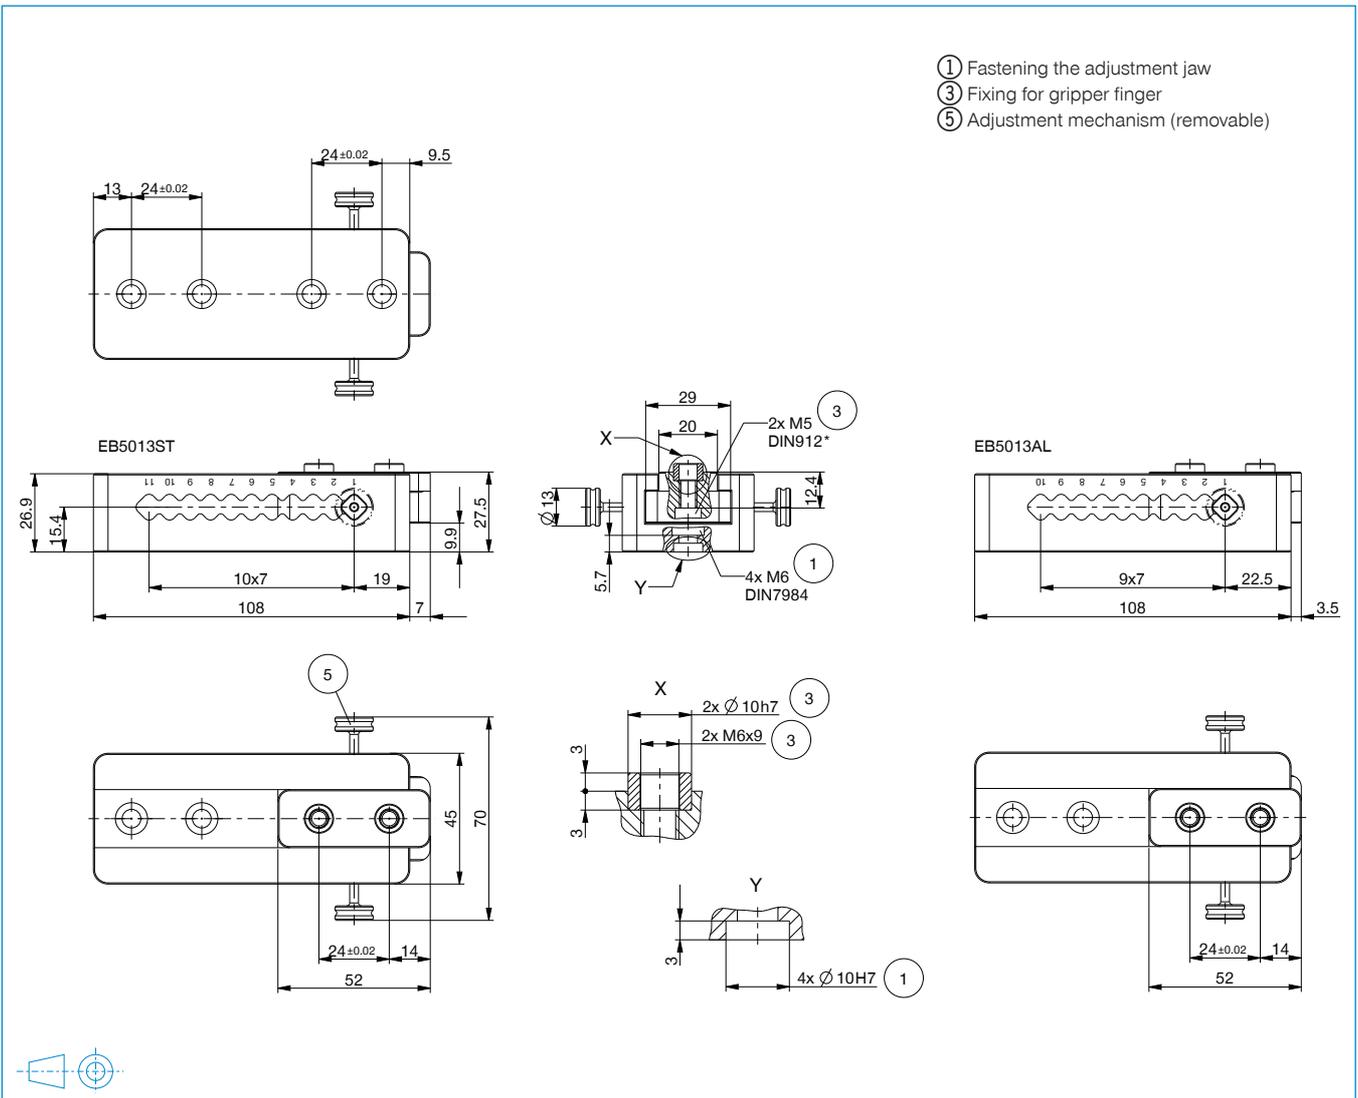


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5016

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

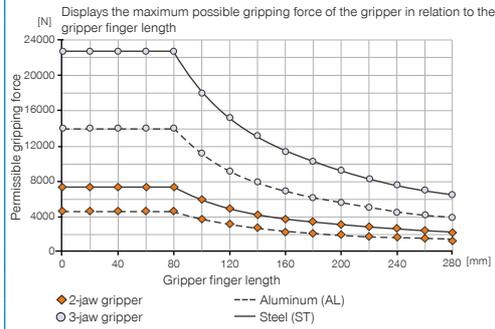

#### ▶ Technical data

Order no.	EB5016AL	EB5016ST
compatible with installation size	GPP5016 / GPD5016	GPP5016 / GPD5016
Max. adjustment range [mm]	72	80
Spacing [mm]	9x8	10x8
Weight per adjustment jaw [kg]	0.56	1.35

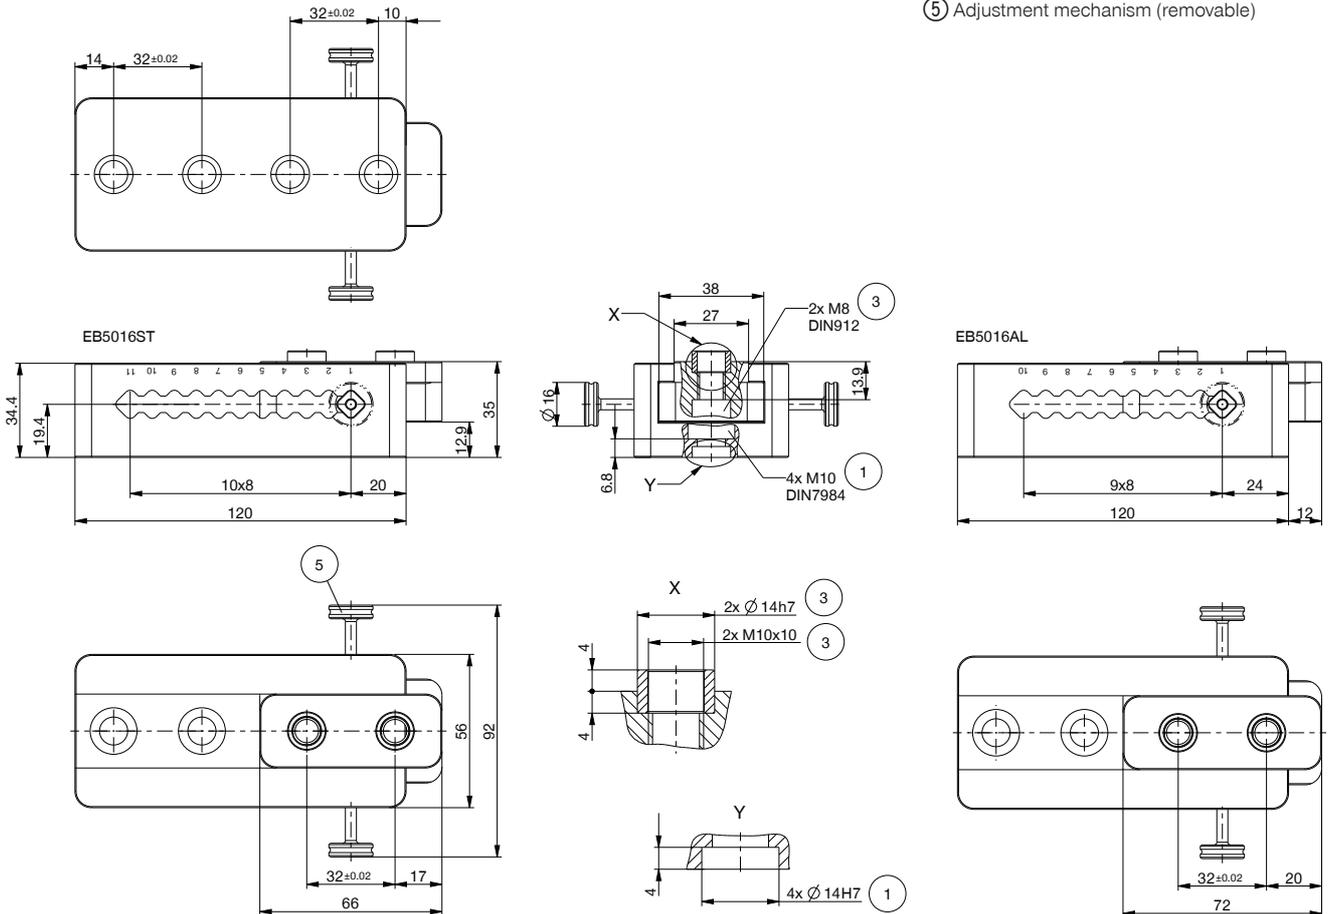


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5025

### ▶ PRODUCT SPECIFICATIONS




#### ▶ Gripping force diagram

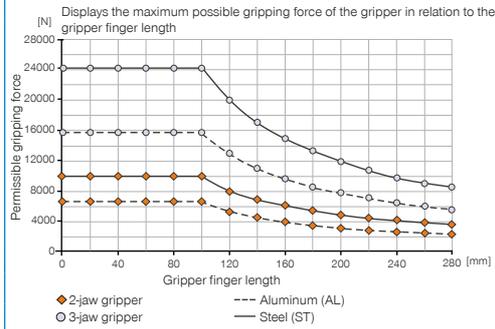

#### ▶ Technical data

Order no.	EB5025AL	EB5025ST
compatible with installation size	GPP5025 / GPD5025 / GPW5025	GPP5025 / GPD5025 / GPW5025
Max. adjustment range [mm]	90	100
Spacing [mm]	9x10	10x10
Weight per adjustment jaw [kg]	0.81	1.95

- ① Fastening the adjustment jaw
- ③ Fixing for gripper finger
- ⑤ Adjustment mechanism (removable)

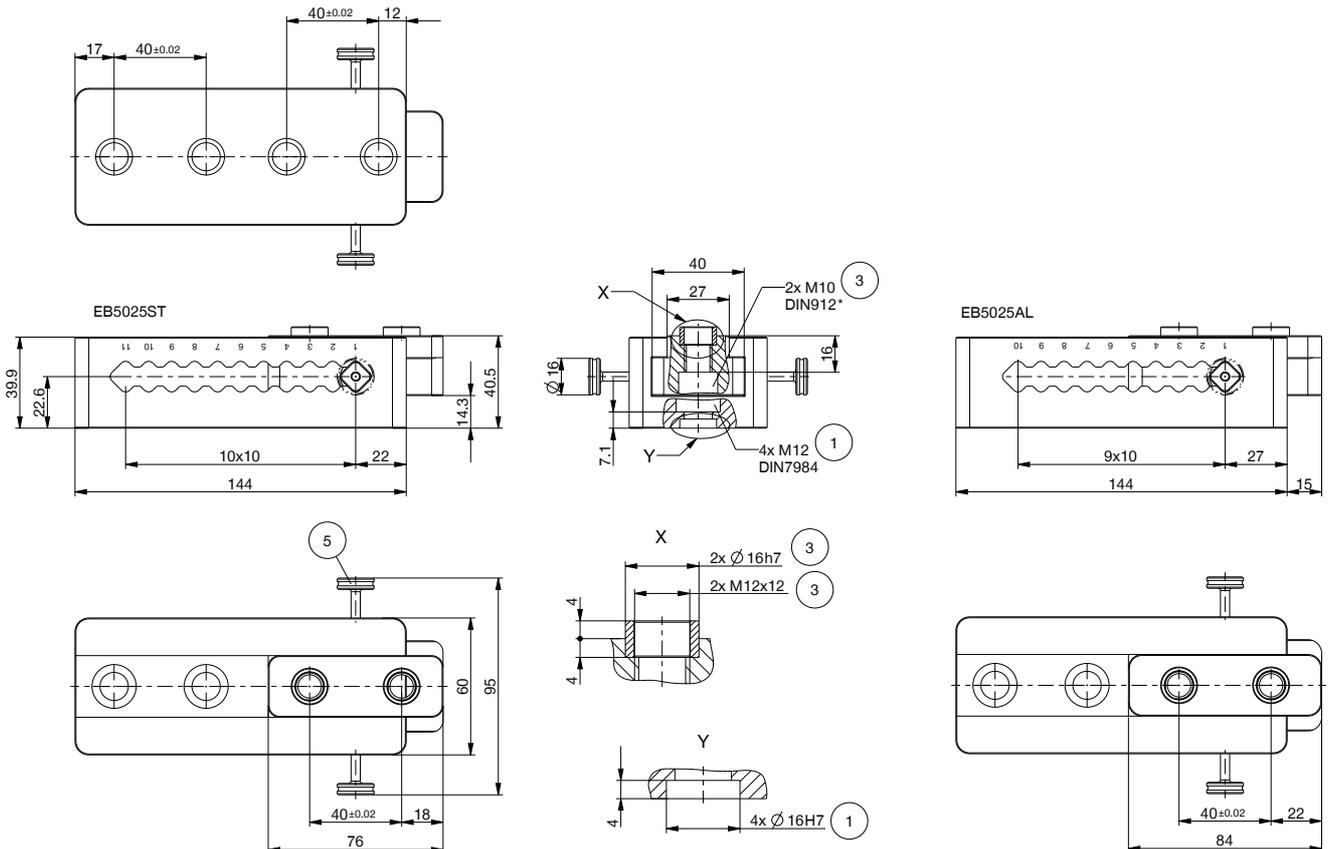


# ADJUSTMENT JAWS

## INSTALLATION SIZE EB5030

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

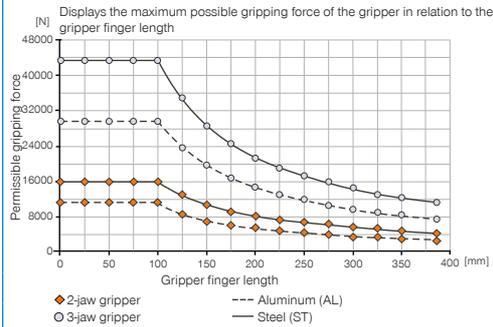

#### Order no.

compatible with installation size  
Max. adjustment range [mm]  
Spacing [mm]  
Weight per adjustment jaw [kg]







#### ▶ Technical data

##### EB5030AL

GPP5030 / GPD5030  
96  
8x12  
1.07

##### EB5030ST

GPP5030 / GPD5030  
108  
9x12  
2.63

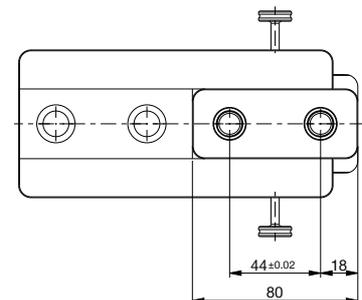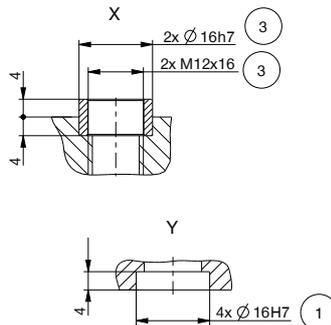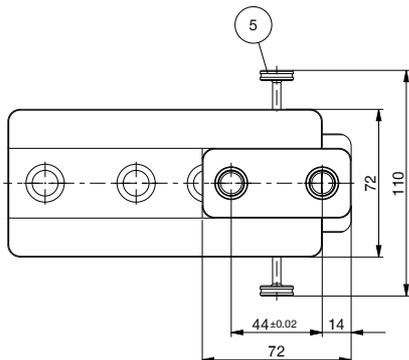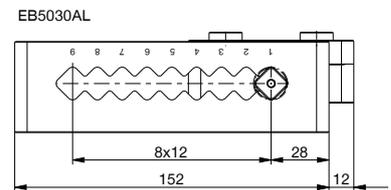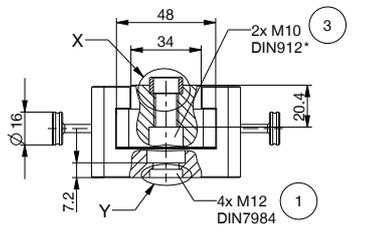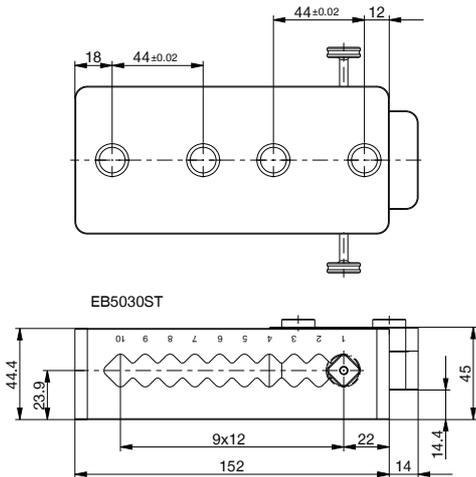


- ① Fastening the adjustment jaw
- ③ Fixing for gripper finger
- ⑤ Adjustment mechanism (removable)





# ANGLE FLANGE SERIES WFR

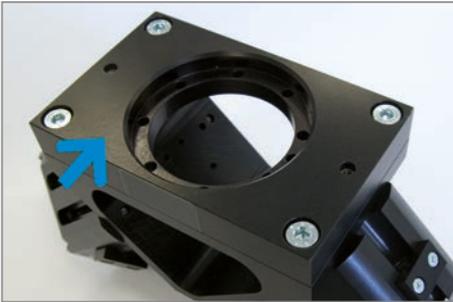

## Flexible connection to your robot

Adapter plate manufactured according to EN ISO 9409-1 matches for a variety of 40 different types of robot manufacturers. In addition, also available for robots with hollow axle.

### 1st step: Select adapter plate

Simply define the type of robot and you get the appropriate adapter plate.




## About 100 different variants

Adapter plates and angle flanges can be combined with 16 different grippers - with the result of more than 100 different varieties. Choose from our main catalog your appropriate gripper. There you will find the most diverse designs: some with other without gripping force safety device, protected from dust or temperature resistant.

### 2nd step: Select Angle flange


Choose a gripper and there follows the right angle flange.

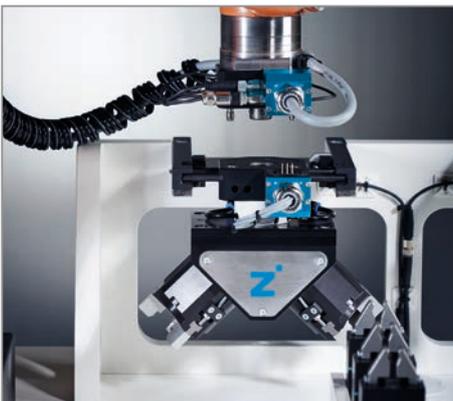

## Extend the functionality of your Angle flange

Cover plate, discharge nozzle or programming pins, with the extensive accessory, you can quickly and individually integrate additional functions.

### 3rd step: Select accessories

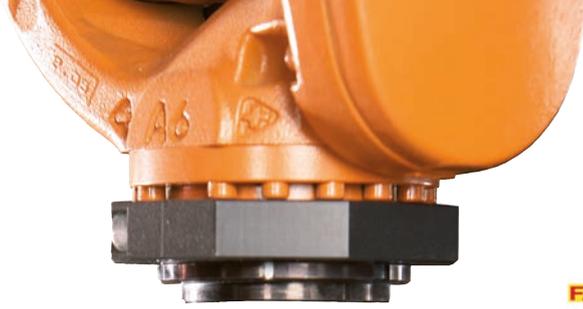

**Order no.:  
Adapter plate**

**1st step:**



Adapter plate

**EPSON**  
**KUKA**  
**MOTOMAN**

**adept**  
**FANUC**  
**KUKA**  
**MOTOMAN**

**peis**  
**UNIVERSAL ROBOTS**

**FANUC**  
**peis**

Connecting flange EN-ISO9409-1 TK 31,5
ViperS650
Pro Six
LR mate 200
KR5 sixx
RV1, RV2, RV3, RV4, RV5, RV6
HP3, HP5, HP6
RX60, TX40, TX60, RS20, RS40, RS60, RS80

APR05
-------

Connecting flange EN-ISO9409-1 TK 40
140, 2400L, 1600-5, 1600-7
Viper S13400
smart six
M-6iB, M16iB, M710iC/20L
FS06, FC06, FA06, FS10C, FC10C
KR16L6 (KS)
RV12
UP6, HP6, HP20, IA20
RX90, RX130XL

APR01
-------

Connecting flange EN-ISO9409-1 TK 50
KR6, KR16, KR30L16
RV10-6, RV20-6
RX130, TX90, RX160
UR3, UR5, UR10

APR02
-------

Connecting flange EN-ISO9409-1 TK 100
NM 16-3.1, NM 25-2.2, NM 45-2.0
M-420iA, M710iC/50/70
KR30, KR60
RV60-40, RV60-60

APR03
-------

M10iA
-------

APR04
-------

**2nd step:**



Angle flange

**Order no.:  
Angle flange**

All other informations about your gripper, you will find in our catalog or online at: [www.zimmer-group.com](http://www.zimmer-group.com)

Grippers to match for WFR03:
GPP5004
GPP5006
GEP5006
GPD5004
GPD5006
GED5006

WFR03
-------

Grippers to match for WFR04:
GPP5008
GPP5010
GEP5008
GPD5008
GPD5010
GED5008
GPW5008

WFR04
-------

**3rd step:**



Cover plate



Discharge nozzle



Programming pins

**Order no.:  
Accessories**

WFR03
WFR04

ABWFR01
ABWFR02

WFR03 + WFR04
---------------

DUWFR01
---------

WFR03 + WFR04
---------------

DUWFR01
---------

# CHECKLIST

## GRIPPERS

Customer number  Telephone number   
Company  Fax number   
Contact  E-mail   
 Mr.  Mrs.

Request Desired date  Request No.   
 Order Order No.   
 Parallel grippers  Concentric grippers  Angular Grippers  
 Other / if yes, which type

### Drive

Pneumatic  Electrical  Hydraulic  
Operating pressure  [bar] Voltage  [V]

### Required stroke

Per jaw  [mm] or Total stroke  [mm]

### Gripper finger length

Gripper top edge to force application point  [mm]

### Ambient conditions

Clean / Dry  Small amount of swarf /  
Coolant overspray  Large amount of swarf /  
Coolant under pressure /  
Grinding agent  
 Chemical substances / if yes, which   
Temperature  [°C] Cycles  per minute

### Required force

Gripping force  [N] or Workpiece weight  kg  g

### Gripping type

Internal gripping  External gripping  
 Frictional fit  Form fit  
Prism angle  [°] Friction coefficient  Axis acceleration  [m/s<sup>2</sup>]

### Self-locking

Not required  In closing  In opening  Pressure safety valve

**Desired accessories**

Inductive sensor       Magnetic field sensor       With Cable       Plugable

Separate cable / if yes, how long       [m]

Pressure safety valve

Pneumatic fittings / if yes, which

Straight fitting

Angled fitting

Air flow control valve

Notes / Comments

Editor / Date

**Attachment**

Sketch

3D model

Others

# USAGE NOTE

## GENERAL

---

The contents of this catalog are not legally binding and are intended solely for informational purposes. Any final agreement will be in the form of a written order confirmation from Zimmer GmbH, which occurs only subject to the respective current General Terms and Conditions of Sale and Delivery of Zimmer GmbH. These can be found online at [www.zimmer-group.com](http://www.zimmer-group.com).

All of the products listed in this catalog are designed for their intended use, e.g. machines for automation. The recognized technical regulations for safety and professional work must be followed for use and installation.

Furthermore, the respective laws, guidelines from TÜV, guidelines from the respective trade association and VDE stipulations shall apply.

The technical data listed in this catalog must be observed by the user. The conditions of use may not fall below or exceed the specified data. If information is missing, it cannot be assumed that there are no upper or lower limits or no limitations for specific use cases. Consultation is required in these cases.

Disposal is not included in the price, which would have to be taken into account accordingly in the event of return to or disposal by Zimmer GmbH.

### TECHNICAL DATA AND FIGURES

The technical data and figures have been compiled with great care and to the best of our knowledge. We cannot guarantee that the information is up to date, correct or complete.

The specifications and information—such as figures, drawings, descriptions, dimensions, weights, materials, technical and other performance data and the described products and services—contained in general product descriptions, Zimmer GmbH catalogs, brochures and price lists in any form are subject to change and may be modified or updated at any time without prior notification. They are binding only to the extent expressly specified in a contract or order confirmation. Slight deviations from such descriptive product information shall be considered approved and shall not affect fulfillment of agreements insofar as they are reasonable for the customer.

### LIABILITY

Products from Zimmer Group are subject to the German Product Liability Act. This catalog does not contain any guarantees, assurances of quality or procurement agreements for the products it depicts, neither expressly nor implied, including for the availability of products. Advertising statements relating to quality features, properties or applications for the products are not legally binding.

To the extent permitted by law, Zimmer GmbH is exempt from any liability for direct or indirect damage, subsequent damage and requests of any kind or on any legal basis resulting from the use of information contained in this catalogue.

### TRADEMARK, COPYRIGHT AND REPRODUCTION

The depiction of commercial property rights in this catalog—such as brands, logos, registered trademarks or patents—does not include the granting of licenses or use rights. Their use is not permitted without the expressed written agreement of Zimmer GmbH. All contents of this catalog are the intellectual property of Zimmer GmbH. For the purposes of copyright, any unlawful use of intellectual property, including excerpts, is prohibited. Reprinting, copying or translating (including in the form of excerpts) are permitted only with the prior written consent of Zimmer GmbH.

### STANDARDS

Zimmer Group has a quality management system certified in accordance with ISO 9001:2008. Zimmer Group has an environmental management system certified in accordance with ISO 14001:2004.

# USAGE NOTE

## INDIVIDUAL

---

### **DECLARATION OF INCORPORATION IN TERMS OF THE EC DIRECTIVE 2006/42/EC ON MACHINERY (ANNEX II 1 B)**

We hereby declare that our elements meet the following basic requirements of the Machinery Directive 2006/42/EC as an incomplete machine

No.1.1.2., No.1.1.3., No.1.1.5., No.1.3.2, No. 1.3.4, No. 1.3.7, No.1.5.3, No.1.5.4, No.1.5.8., No.1.6.4, No.1.7.1, No.1.7.3, No.1.7.4.

We also declare that the specific technical documents were produced in accordance with Annex VII Part B of this Directive. We undertake to provide the market supervisory bodies with electronic versions of the incomplete machine's special documents via our documentation department should they have reason to request them.

The incomplete machine may only be commissioned if the machine or system in which the incomplete machine is to be installed has been determined to satisfy the conditions of the Machinery Directive 2006/42/EC and the EC Declaration of Conformity has been produced in accordance with Annex II A.

The contents and data correspond to the status as of printing. Edition 04/2020.

This catalog was created with great care and all information has been checked for accuracy. However, we assume no liability for incorrect or incomplete information. Zimmer Group reserves the right to technical changes and improvements through constant ongoing development of products and services. All text, images, depictions and illustrations in this catalog are the property of Zimmer Group and protected by copyright. Any duplicating, editing, changing, translating, filming, processing or saving in electronic systems is prohibited without the consent of Zimmer Group.